SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B240
(Intel Xeon X3323, 2.50 GHz)

SPECfp®2006 = 18.6

SPECfp_base2006 = 17.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Nov-2008
Hardware Availability: Jun-2008
Software Availability: Nov-2007

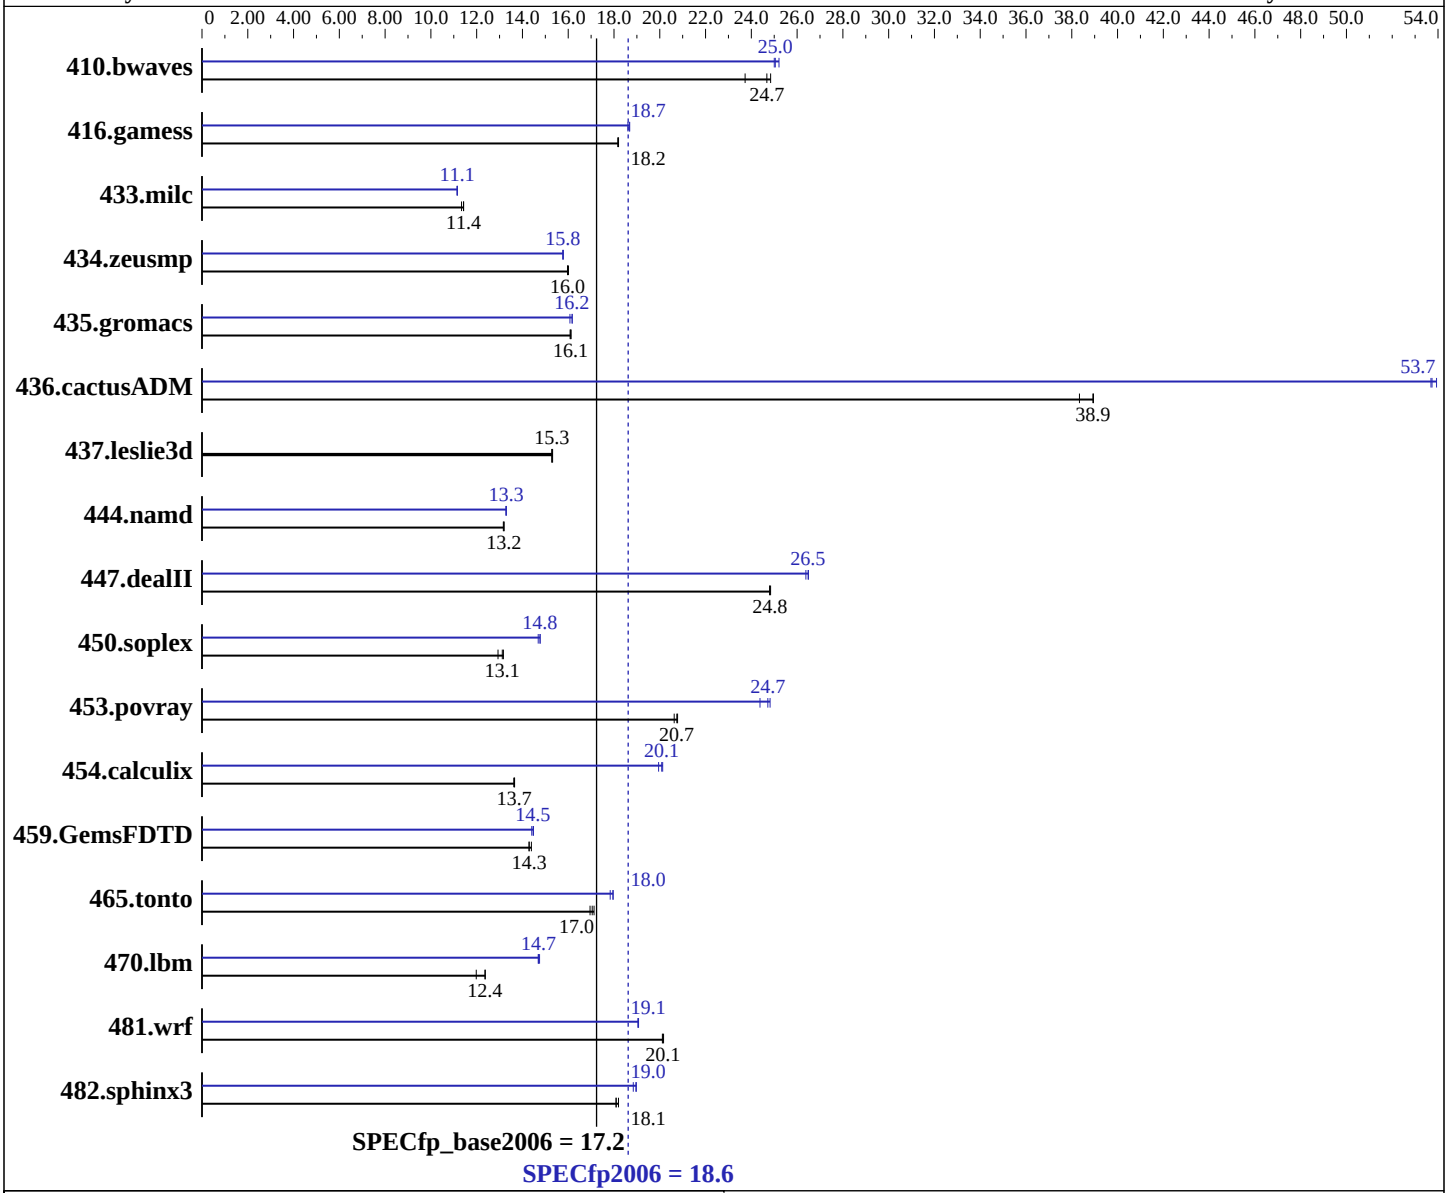

Hardware

CPU Name:	Intel Xeon X3323
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip, 3 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE LINUX Enterprise Server 10 (x86_64) SP1 Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B240
(Intel Xeon X3323, 2.50 GHz)

SPECfp2006 = 18.6

SPECfp_base2006 = 17.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Nov-2008
Hardware Availability: Jun-2008
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 8 GB (4x2 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem: 1x73 GB SAS, 15000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	573	23.7	**551**	**24.7**	547	24.8	539	25.2	544	25.0	**543**	**25.0**
416.gamess	1078	18.2	1076	18.2	**1077**	**18.2**	1048	18.7	1052	18.6	**1049**	**18.7**
433.milc	810	11.3	**803**	**11.4**	803	11.4	**823**	**11.1**	823	11.1	823	11.2
434.zeusmp	**570**	**16.0**	570	16.0	568	16.0	576	15.8	577	15.8	**577**	**15.8**
435.gromacs	443	16.1	**443**	**16.1**	444	16.1	**442**	**16.2**	444	16.1	441	16.2
436.cactusADM	312	38.3	**307**	**38.9**	307	38.9	**222**	**53.7**	223	53.7	222	53.9
437.leslie3d	614	15.3	**615**	**15.3**	615	15.3	614	15.3	**615**	**15.3**	615	15.3
444.namd	609	13.2	**608**	**13.2**	608	13.2	**603**	**13.3**	603	13.3	604	13.3
447.dealII	**461**	**24.8**	461	24.8	461	24.8	**432**	**26.5**	434	26.4	432	26.5
450.soplex	645	12.9	**636**	**13.1**	633	13.2	**565**	**14.8**	565	14.8	568	14.7
453.povray	**256**	**20.7**	256	20.8	258	20.6	**215**	**24.7**	214	24.8	218	24.4
454.calculix	**604**	**13.7**	604	13.7	606	13.6	414	19.9	410	20.1	**411**	**20.1**
459.GemsFDTD	737	14.4	**742**	**14.3**	743	14.3	736	14.4	**733**	**14.5**	733	14.5
465.tonto	574	17.1	580	17.0	**577**	**17.0**	552	17.8	**548**	**18.0**	548	18.0
470.lbm	1147	12.0	**1112**	**12.4**	1110	12.4	**935**	**14.7**	935	14.7	932	14.7
481.wrf	**555**	**20.1**	555	20.1	554	20.2	**586**	**19.1**	586	19.1	586	19.1
482.sphinx3	1071	18.2	**1077**	**18.1**	1077	18.1	**1028**	**19.0**	1027	19.0	1034	18.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 200M
```

Platform Notes

```
BIOS Settings:
Hardware Prefetcher = Enabled
Adjacent Cache Line Prefetch = Enabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Fortran benchmarks:
-fast -parallel

Benchmarks using both Fortran and C:
-fast -parallel

Peak Compiler Invocation

C benchmarks (except as noted below):
```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

433.milc: `icc`

C++ benchmarks (except as noted below):
```
icpc
```

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icc ifort
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/EM64T_Intel101_fp_flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/EM64T_Intel101_fp_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:45:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 November 2008.