



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 50.5

PowerEdge R200 (Intel Xeon X3360, 2.83 GHz)

SPECfp_rate_base2006 = 49.4

CPU2006 license: 55


Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

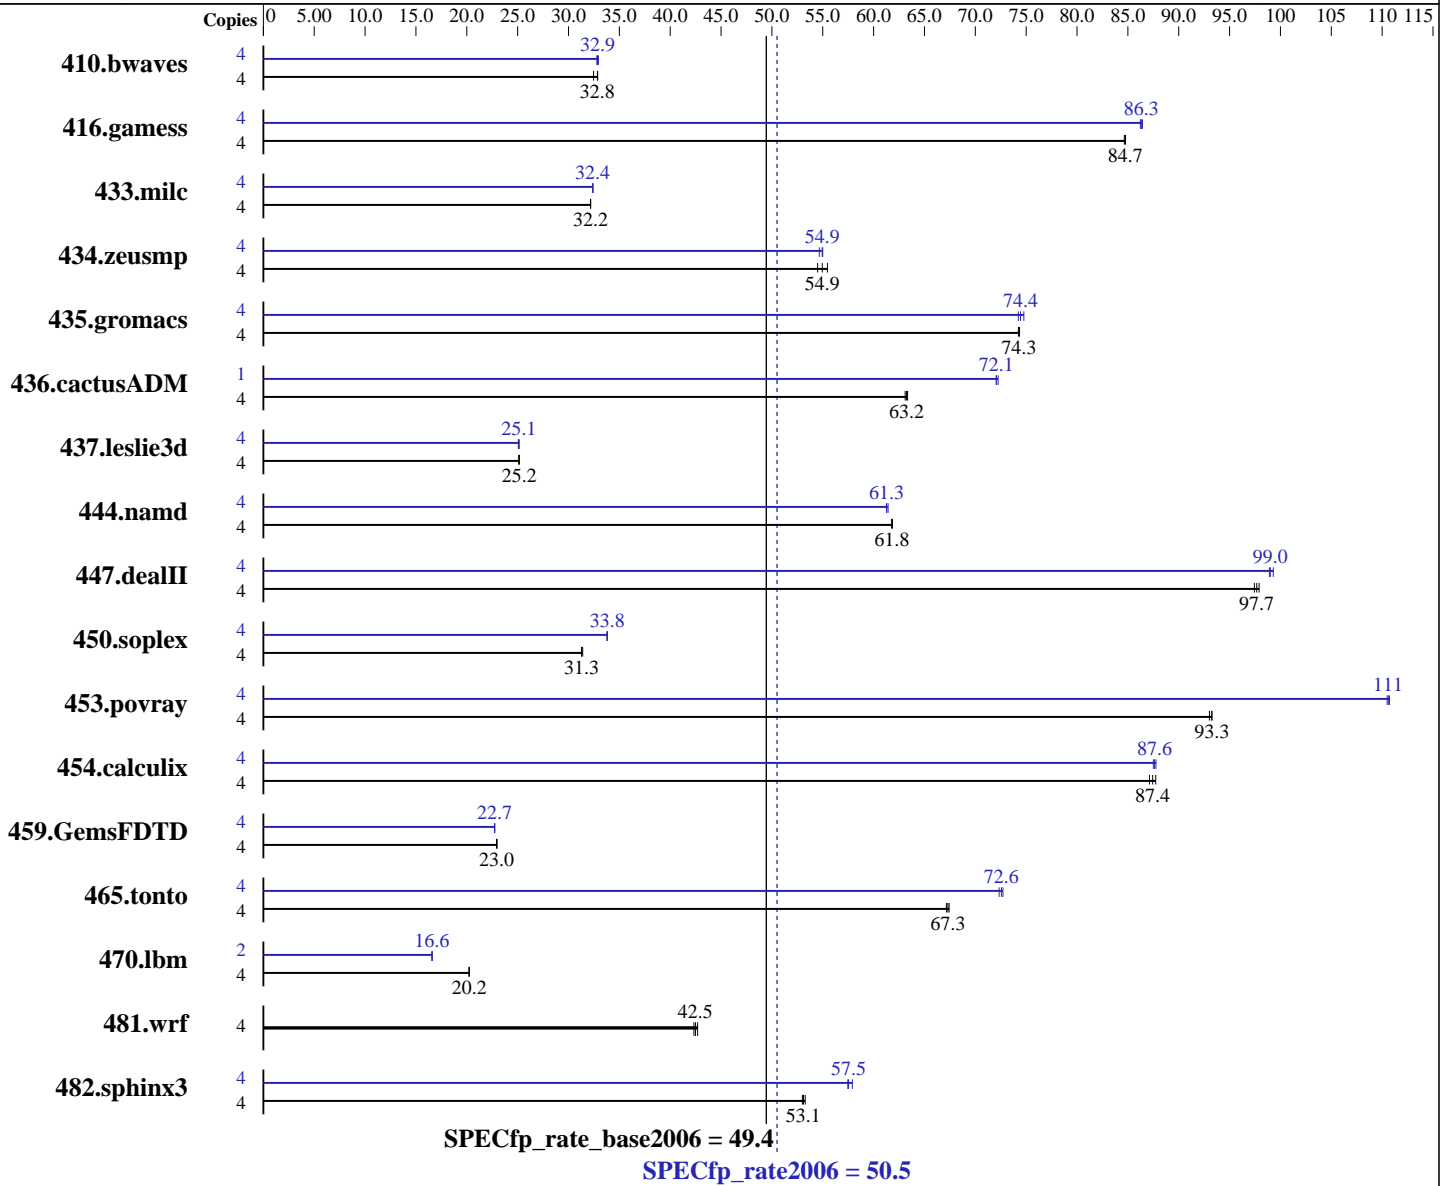

Hardware

CPU Name: Intel Xeon X3360
 CPU Characteristics: 2833
 CPU MHz: 2833
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 50.5

PowerEdge R200 (Intel Xeon X3360, 2.83 GHz)

SPECfp_rate_base2006 = 49.4

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 8 GB (4 x 2 GB DDR2-800)
Disk Subsystem: 1 x 750 GB 7200 RPM SATA
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1674	32.5	1654	32.9	1655	32.8	4	1658	32.8	1650	32.9	1654	32.9
416.gamess	4	925	84.6	924	84.8	924	84.7	4	907	86.3	908	86.2	906	86.4
433.milc	4	1141	32.2	1142	32.2	1141	32.2	4	1134	32.4	1134	32.4	1133	32.4
434.zeusmp	4	656	55.5	668	54.5	662	54.9	4	662	54.9	662	55.0	666	54.7
435.gromacs	4	384	74.3	384	74.3	385	74.2	4	384	74.4	385	74.2	382	74.8
436.cactusADM	4	756	63.2	758	63.1	755	63.3	1	166	72.1	165	72.2	166	72.1
437.leslie3d	4	1494	25.2	1495	25.2	1498	25.1	4	1500	25.1	1495	25.1	1496	25.1
444.namd	4	519	61.8	519	61.8	519	61.8	4	524	61.3	524	61.3	522	61.4
447.dealII	4	467	97.9	469	97.7	470	97.4	4	462	99.0	461	99.3	463	98.9
450.soplex	4	1066	31.3	1066	31.3	1063	31.4	4	987	33.8	987	33.8	986	33.8
453.povray	4	229	93.0	228	93.3	228	93.3	4	192	111	192	111	193	110
454.calculix	4	376	87.7	379	87.1	377	87.4	4	377	87.5	377	87.6	376	87.8
459.GemsFDTD	4	1849	23.0	1850	22.9	1849	23.0	4	1866	22.7	1867	22.7	1866	22.7
465.tonto	4	585	67.3	586	67.2	584	67.4	4	544	72.3	542	72.6	541	72.7
470.lbm	4	2716	20.2	2716	20.2	2716	20.2	2	1657	16.6	1657	16.6	1657	16.6
481.wrf	4	1046	42.7	1056	42.3	1052	42.5	4	1046	42.7	1056	42.3	1052	42.5
482.sphinx3	4	1463	53.3	1468	53.1	1471	53.0	4	1346	57.9	1357	57.5	1355	57.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Platform Notes

BIOS Settings:
Hardware Prefetcher = Disabled (Default = Enabled)
Adjacent Cache Line Prefetch = Disabled (Default = Enabled)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 50.5

PowerEdge R200 (Intel Xeon X3360, 2.83 GHz)

SPECfp_rate_base2006 = 49.4

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

General Notes

taskset was used to bind processes to cores except for 436.cactusADM peak
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 50.5

PowerEdge R200 (Intel Xeon X3360, 2.83 GHz)

SPECfp_rate_base2006 = 49.4

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/Compiler/11.0/042/bin/ia32/ifort
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 50.5

PowerEdge R200 (Intel Xeon X3360, 2.83 GHz)

SPECfp_rate_base2006 = 49.4

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -fno-alias
 470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
 -auto-ilp32
 482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -fno-alias -auto-ilp32
 447.deallI: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-
 450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -opt-malloc-options=3
 453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
 416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -unroll2 -Ob0 -ansi-alias
 -scalar-rep-
 434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static
 437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 50.5

PowerEdge R200 (Intel Xeon X3360, 2.83 GHz)

SPECfp_rate_base2006 = 49.4

CPU2006 license: 55

Test date: Oct-2008

Test sponsor: Dell Inc.

Hardware Availability: Mar-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.05.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.11.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.05.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.11.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:57:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 November 2008.