



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

ESPRIMO P7935, Intel Core 2 Duo E7400


SPECint_rate2006 = 33.1

CPU2006 license: 22

Test date: Oct-2008

Hardware Availability: Jul-2008

Software Availability: Feb-2008

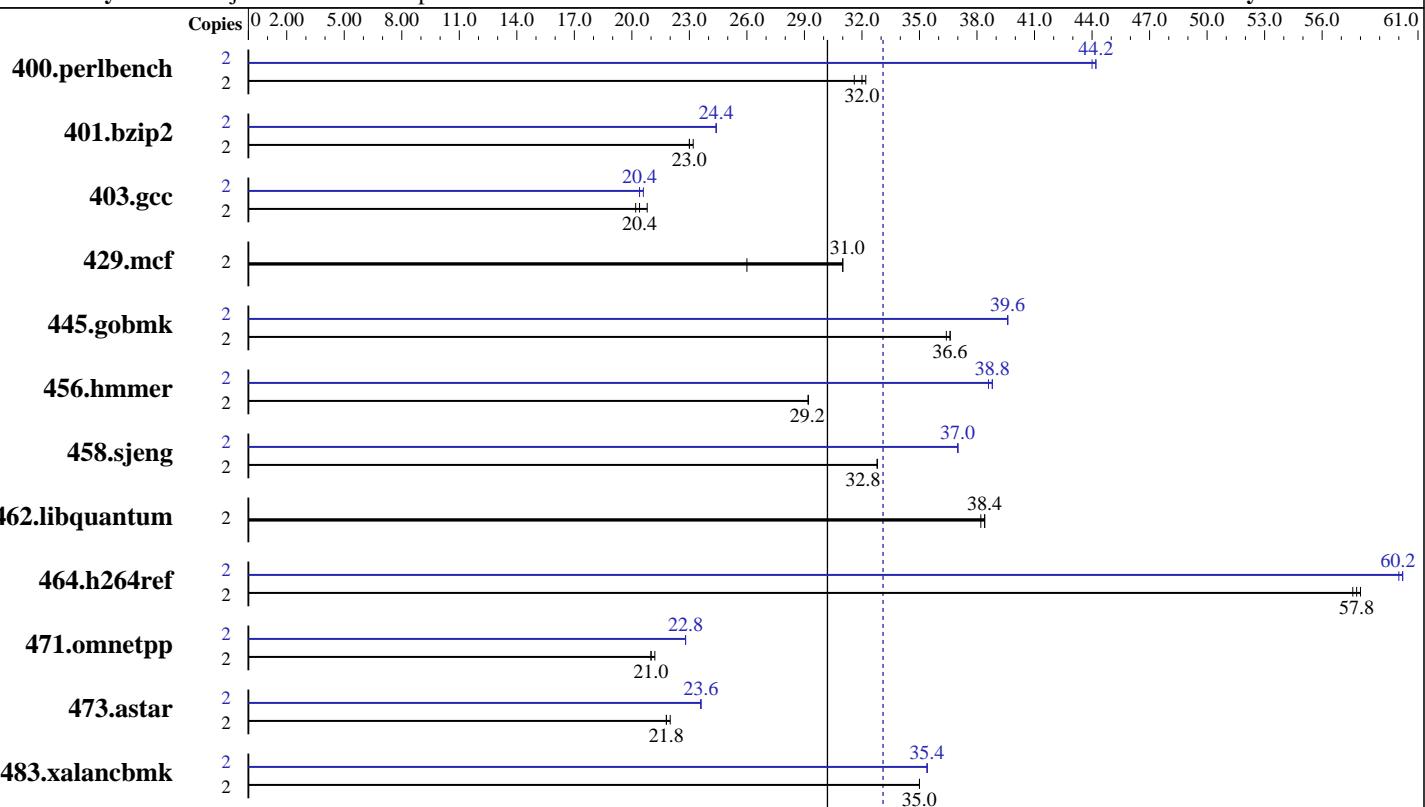

SPECint_rate_base2006 = 30.2

SPECint_rate2006 = 33.1

Hardware

CPU Name: Intel Core 2 Duo E7400
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 3 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 2 GB (2x1 GB PC2-6400U-666-12 SDRAM)
 Disk Subsystem: 1 x 250 GB SATA-II, 8MB, 7200 RPM
 Other Hardware: None

Software

Operating System: Windows XP Professional x64 Edition SP2
 Compiler: Intel C++ Compiler for applications running on IA-32, Version 10.1, Build 20080212
 Intel C++ Compiler for applications running on Intel 64, Version 10.1, Build 20080212
 Microsoft Visual Studio 2005 with SP1 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

ESPRIMO P7935, Intel Core 2 Duo E7400

SPECint_rate2006 = 33.1

CPU2006 license: 22

Test date: Oct-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jul-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	608	32.2	618	31.6	612	32.0	2	443	44.2	442	44.2	444	44.0
401.bzip2	2	842	23.0	837	23.0	829	23.2	2	792	24.4	793	24.4	792	24.4
403.gcc	2	796	20.2	792	20.4	778	20.8	2	782	20.6	792	20.4	787	20.4
429.mcf	2	702	26.0	588	31.0	587	31.0	2	702	26.0	588	31.0	587	31.0
445.gobmk	2	576	36.4	573	36.6	573	36.6	2	530	39.6	530	39.6	529	39.6
456.hmmer	2	641	29.2	641	29.2	641	29.2	2	482	38.8	483	38.6	482	38.8
458.sjeng	2	738	32.8	739	32.8	738	32.8	2	656	37.0	655	37.0	655	37.0
462.libquantum	2	1080	38.4	1080	38.4	1084	38.2	2	1080	38.4	1080	38.4	1084	38.2
464.h264ref	2	769	57.6	764	58.0	767	57.8	2	734	60.2	737	60.0	736	60.2
471.omnetpp	2	593	21.0	593	21.0	592	21.2	2	549	22.8	549	22.8	549	22.8
473.astar	2	642	21.8	641	22.0	642	21.8	2	593	23.6	593	23.6	593	23.6
483.xalancbmk	2	393	35.0	394	35.0	395	35.0	2	391	35.4	391	35.4	389	35.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Screen Saver was disabled

Power scheme was modified to Always On; Turn off monitor: Never; Turn off hard disks: Never

Platform Notes

BIOS default settings have been used.

General Notes

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

 icl -Qvc8 -Qc99

C++ benchmarks:

 icl -Qvc8



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

ESPRIMO P7935, Intel Core 2 Duo E7400

SPECint_rate2006 = 33.1

CPU2006 license: 22

Test date: Oct-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jul-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2008

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp, --no_wchar_t_keyword

Base Optimization Flags

C benchmarks:

-fast -Qvec-guard-write -F512000000

C++ benchmarks:

-fast -Qcxx_features -F512000000 shlw32M.lib -link -FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc8 -Qc99

401.bzip2: C:\DevelTools\Intel\Compiler\C++\10.1.021\EM64T\Bin\icl.exe
-IC:C:\DevelTools\Intel\Compiler\C++\10.1.021\EM64T\Include
-link -LIBPATH:C:\DevelTools\Intel\Compiler\C++\10.1.021\EM64T\Lib
-link -LIBPATH:C:\ProgramFiles\MicrosoftVisualStudio8\VC\lib\AMD64
-link -LIBPATH:C:\ProgramFiles\MicrosoftVisualStudio8\VC\PlatformSDK\lib\AMD64
-link -LIBPATH:C:\ProgramFiles\MicrosoftVisualStudio8\VC\lib

456.hmmer: C:\DevelTools\Intel\Compiler\C++\10.1.021\EM64T\Bin\icl.exe
-IC:C:\DevelTools\Intel\Compiler\C++\10.1.021\EM64T\Include
-link -LIBPATH:C:\DevelTools\Intel\Compiler\C++\10.1.021\EM64T\Lib
-link -LIBPATH:C:\ProgramFiles\MicrosoftVisualStudio8\VC\lib\AMD64
-link -LIBPATH:C:\ProgramFiles\MicrosoftVisualStudio8\VC\PlatformSDK\lib\AMD64
-link -LIBPATH:C:\ProgramFiles\MicrosoftVisualStudio8\VC\lib

C++ benchmarks:

icl -Qvc8



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 33.1

ESPRIMO P7935, Intel Core 2 Duo E7400

SPECint_rate_base2006 = 30.2

CPU2006 license: 22

Test date: Oct-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jul-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2008

Peak Portability Flags

```
401.bzip2: -DSPEC_CPU_P64  
403.gcc: -DSPEC_CPU_WIN32  
456.hmmer: -DSPEC_CPU_P64  
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32  
483.xalancbmk: -Qoption_cpp,--no_wchar_t_keyword
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias  
               -Qprefetch -F512000000 shlw32M.lib -link -FORCE:MULTIPLE  
  
401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qprefetch  
           -F512000000  
  
403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -F512000000  
  
429.mcf: basepeak = yes  
  
445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo  
           -Qprec-div- -Qansi-alias -F512000000  
  
456.hmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2  
           -Qansi-alias -Qopt-multi-version-aggressive -F512000000  
  
458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4  
           -F512000000  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2  
           -Qansi-alias -F512000000
```

C++ benchmarks:

```
471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias  
             -Qopt-ra-region-strategy=block -Qcxx_features -F512000000  
             shlw32M.lib -link -FORCE:MULTIPLE  
  
473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias  
           -Qopt-ra-region-strategy=routine -Qcxx_features -F512000000  
           shlw32M.lib -link -FORCE:MULTIPLE  
  
483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias  
                -Qcxx_features -F512000000 shlw32M.lib  
                -link -FORCE:MULTIPLE
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

ESPRIMO P7935, Intel Core 2 Duo E7400

SPECint_rate2006 = 33.1

SPECint_rate_base2006 = 30.2

CPU2006 license: 22

Test date: Oct-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jul-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2008

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.01.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.01.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 21:46:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 November 2008.