



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 67.4

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECint_rate_base2006 = 56.6

CPU2006 license: 3


Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

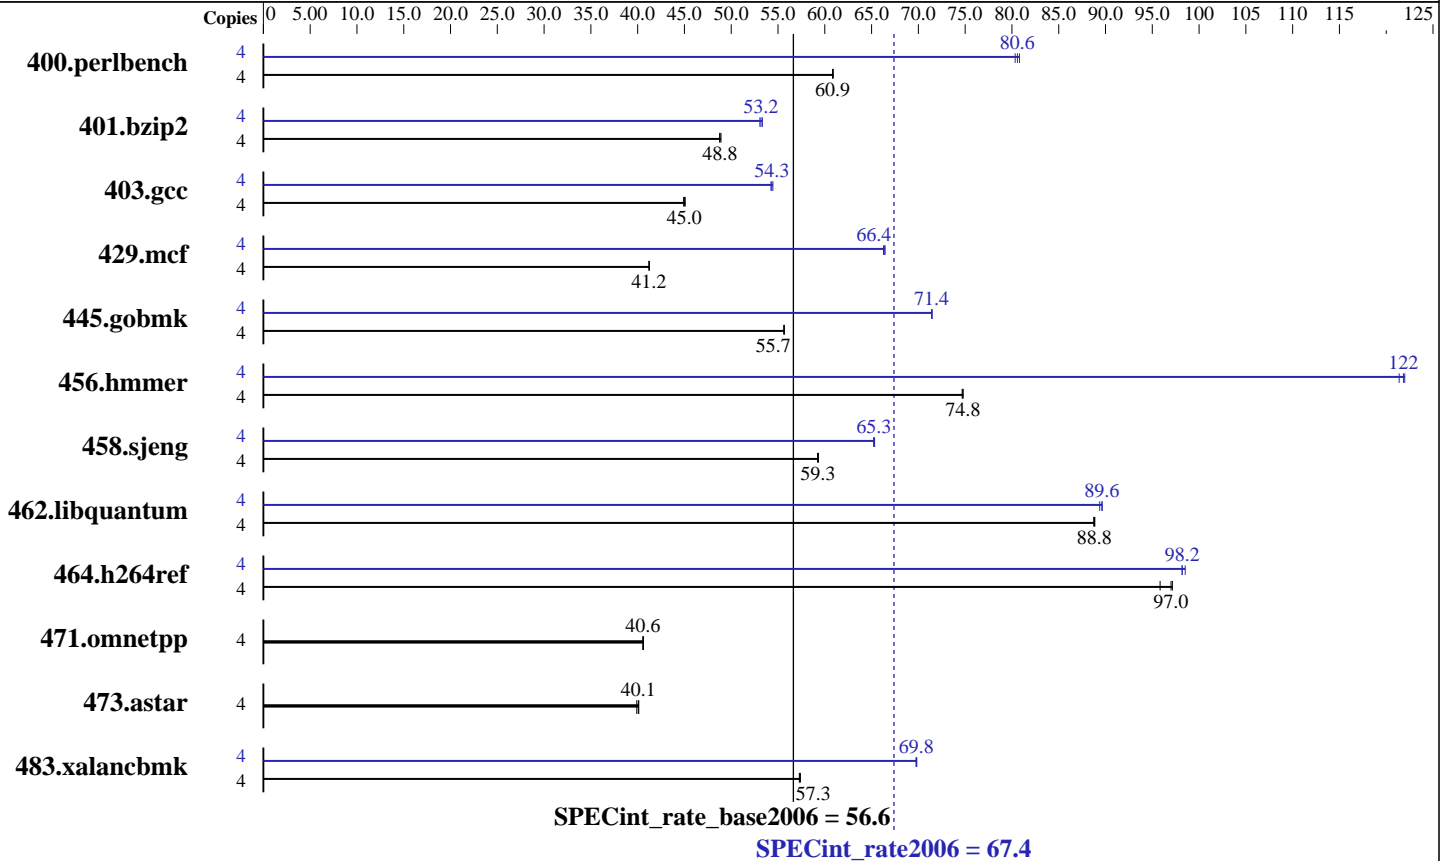

Hardware

CPU Name: AMD Opteron 2384
 CPU Characteristics:
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4x4 GB, PC2-6400P CL5)
 Disk Subsystem: 2x146 GB 10 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.17.50
 32-bit and 64-bit libhugetlbfs libraries
 SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 67.4

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECint_rate_base2006 = 56.6

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2008
Hardware Availability: Nov-2008
Software Availability: Jun-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<u>642</u>	<u>60.9</u>	642	60.8	642	60.9	4	486	80.3	484	80.8	<u>485</u>	<u>80.6</u>
401.bzip2	4	<u>791</u>	<u>48.8</u>	789	48.9	791	48.8	4	727	53.1	724	53.3	<u>726</u>	<u>53.2</u>
403.gcc	4	<u>716</u>	<u>45.0</u>	714	45.1	717	44.9	4	591	54.5	<u>593</u>	<u>54.3</u>	594	54.2
429.mcf	4	885	41.2	884	41.2	<u>885</u>	<u>41.2</u>	4	<u>549</u>	<u>66.4</u>	550	66.3	549	66.4
445.gobmk	4	754	55.7	<u>754</u>	<u>55.7</u>	754	55.6	4	<u>587</u>	<u>71.4</u>	587	71.5	587	71.4
456.hammer	4	<u>499</u>	<u>74.8</u>	500	74.7	499	74.8	4	<u>306</u>	<u>122</u>	306	122	307	121
458.sjeng	4	816	59.3	817	59.2	<u>816</u>	<u>59.3</u>	4	<u>741</u>	<u>65.3</u>	742	65.2	741	65.3
462.libquantum	4	<u>933</u>	<u>88.8</u>	933	88.9	934	88.7	4	927	89.4	<u>925</u>	<u>89.6</u>	925	89.6
464.h264ref	4	924	95.8	911	97.1	<u>913</u>	<u>97.0</u>	4	899	98.5	902	98.2	<u>901</u>	<u>98.2</u>
471.omnetpp	4	<u>616</u>	<u>40.6</u>	616	40.6	615	40.6	4	<u>616</u>	<u>40.6</u>	616	40.6	615	40.6
473.astar	4	<u>701</u>	<u>40.1</u>	700	40.1	704	39.9	4	<u>701</u>	<u>40.1</u>	700	40.1	704	39.9
483.xalancbmk	4	<u>481</u>	<u>57.3</u>	482	57.3	481	57.4	4	395	69.8	396	69.7	<u>395</u>	<u>69.8</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 3584.
NCPUS set to number of cores

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 67.4

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECint_rate_base2006 = 56.6

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:6 -tp barcelona-32 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 67.4

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECint_rate_base2006 = 56.6

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
-IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
-CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
-OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
-m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
-LNO:trip_count=256 -LNO:prefetch_ahead=10
-CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-L/usr/lib -lhugetlbfs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 67.4

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECint_rate_base2006 = 56.6

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
-LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmcr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
-Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
-Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
-LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
-LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
-Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: basepeak = yes

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-L/cpu2006/SmartHeap_8.1/lib -lsmarheap

Peak Other Flags

C benchmarks:

456.hmmcr: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 67.4

ProLiant BL465c G5
(2.7 GHz AMD Opteron 2384)

SPECint_rate_base2006 = 56.6

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Other Flags (Continued)

C++ benchmarks (except as noted below):
-Mipa=jobs:4

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:55:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 November 2008.