



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

### SPECint®\_rate2006 = 134

### IBM BladeCenter LS42 (AMD Opteron 8384)

### SPECint\_rate\_base2006 = 112

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Nov-2008

Hardware Availability: Nov-2008

Software Availability: Jun-2008

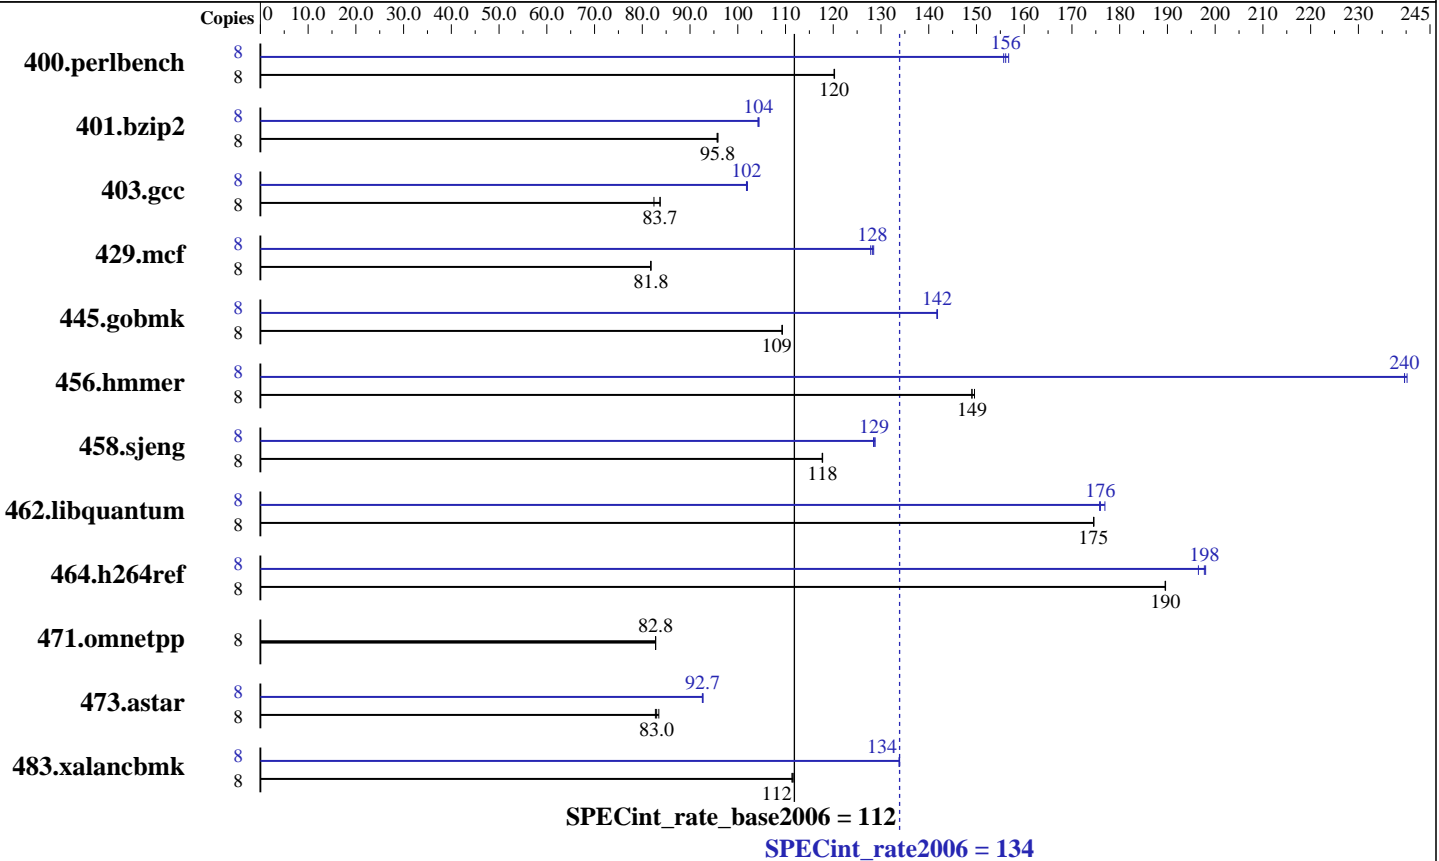

#### Hardware

CPU Name: AMD Opteron 8384  
 CPU Characteristics:  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2,3,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8 x 4 GB DDR2-6400 ECC)  
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM  
 Other Hardware: None

#### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18 32-bit and 64-bit libhugetlbfs libraries SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint\_rate2006 = 134

## IBM BladeCenter LS42 (AMD Opteron 8384)

SPECint\_rate\_base2006 = 112

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: Advanced Micro Devices

Test date: Nov-2008  
Hardware Availability: Nov-2008  
Software Availability: Jun-2008

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>650</b>	<b>120</b>	650	120	650	120	8	499	157	502	156	<b>501</b>	<b>156</b>
401.bzip2	8	807	95.7	805	95.8	<b>806</b>	<b>95.8</b>	8	741	104	<b>740</b>	<b>104</b>	739	104
403.gcc	8	769	83.8	<b>769</b>	<b>83.7</b>	781	82.4	8	631	102	<b>632</b>	<b>102</b>	632	102
429.mcf	8	892	81.8	892	81.8	<b>892</b>	<b>81.8</b>	8	571	128	<b>569</b>	<b>128</b>	568	128
445.gobmk	8	767	109	768	109	<b>768</b>	<b>109</b>	8	592	142	<b>592</b>	<b>142</b>	592	142
456.hammer	8	501	149	<b>501</b>	<b>149</b>	499	150	8	311	240	<b>311</b>	<b>240</b>	311	240
458.sjeng	8	822	118	823	118	<b>822</b>	<b>118</b>	8	<b>753</b>	<b>129</b>	752	129	754	128
462.libquantum	8	<b>950</b>	<b>175</b>	950	175	949	175	8	937	177	<b>942</b>	<b>176</b>	943	176
464.h264ref	8	934	190	934	190	<b>934</b>	<b>190</b>	8	901	196	894	198	<b>895</b>	<b>198</b>
471.omnetpp	8	604	82.8	<b>604</b>	<b>82.8</b>	604	82.8	8	604	82.8	<b>604</b>	<b>82.8</b>	604	82.8
473.astar	8	673	83.5	679	82.7	<b>677</b>	<b>83.0</b>	8	606	92.7	<b>606</b>	<b>92.7</b>	607	92.6
483.xalancbmk	8	496	111	<b>495</b>	<b>112</b>	495	112	8	<b>412</b>	<b>134</b>	413	134	412	134

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores

### General Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=7168 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

Environment variables set by runspec before the start of the run:  
HUGETLB\_MORECORE = "yes"  
LD\_LIBRARY\_PATH = "/root/work/cpu2006v1.1/amd909gh-libs/64:/root/work/cpu2006v1.1/amd909gh-libs/32"  
Memory ChipKill Disabled in BIOS

### Base Compiler Invocation

C benchmarks:  
pgcc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 134

IBM BladeCenter LS42 (AMD Opteron 8384)

SPECint\_rate\_base2006 = 112

CPU2006 license: 11

Test date: Nov-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:  
pgcpp

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc\_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic\_pgi

## Base Other Flags

C benchmarks:  
-Mipa=jobs:4

C++ benchmarks:  
-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):  
pathcc  
  
456.hmmer: pgcc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 134

IBM BladeCenter LS42 (AMD Opteron 8384)

SPECint\_rate\_base2006 = 112

CPU2006 license: 11

Test date: Nov-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

## Peak Compiler Invocation (Continued)

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000  
 -IPA:field\_reorder=on -LNO:opt=0 -WOPT:if\_conv=0  
 -CG:local\_sched\_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast  
 -OPT:goto=off -INLINE:aggressive=on -CG:local\_sched\_alg=1  
 -m3dnow  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
 -L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=1  
 -LNO:trip\_count=256 -LNO:prefetch\_ahead=10  
 -CG:prefer\_lru\_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
 -L/usr/lib -lhugetlbfs

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 134

IBM BladeCenter LS42 (AMD Opteron 8384)

SPECint\_rate\_base2006 = 112

CPU2006 license: 11

Test date: Nov-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

## Peak Optimization Flags (Continued)

445.gobmk (continued):

-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict  
-LNO:prefetch=1 -LNO:ignore\_feedback=off -CG:p2align=on

456.hmmer:

-Mvect=cachesize:6291456 -fastsse -Mvect=partial  
-Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0  
-Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

458.sjeng:

-march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa  
-LNO:ignore\_feedback=off -LNO:full\_unroll=10 -LNO:fusion=0  
-LNO:fission=2 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum:

-Mvect=cachesize:6291456 -fastsse -Munroll=m:8  
-Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed  
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64  
-Bstatic\_pgi

464.h264ref:

-march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off -CG:prefer\_lru\_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar:

-Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse  
-O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed  
--zc\_eh -tp barcelona-32 -Bstatic\_pgi

483.xalancbmk:

-march=barcelona -Ofast -INLINE:aggressive=on -m32  
-L/root/work/libraries/SmartHeap\_8.1/lib -lsmarheap

## Peak Other Flags

C benchmarks:

456.hmmer: -Mipa=jobs:4

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 134

IBM BladeCenter LS42 (AMD Opteron 8384)

SPECint\_rate\_base2006 = 112

CPU2006 license: 11

Test date: Nov-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

## Peak Other Flags (Continued)

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.html](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html)

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090713.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.xml](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml)

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 21:06:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 December 2008.