SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision R5400 (Intel Xeon X5270, 3.50 GHz)

SPECfp®2006 = 23.7

SPECfp_base2006 = 23.0

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Dec-2008
Hardware Availability: Oct-2008
Software Availability: Nov-2008

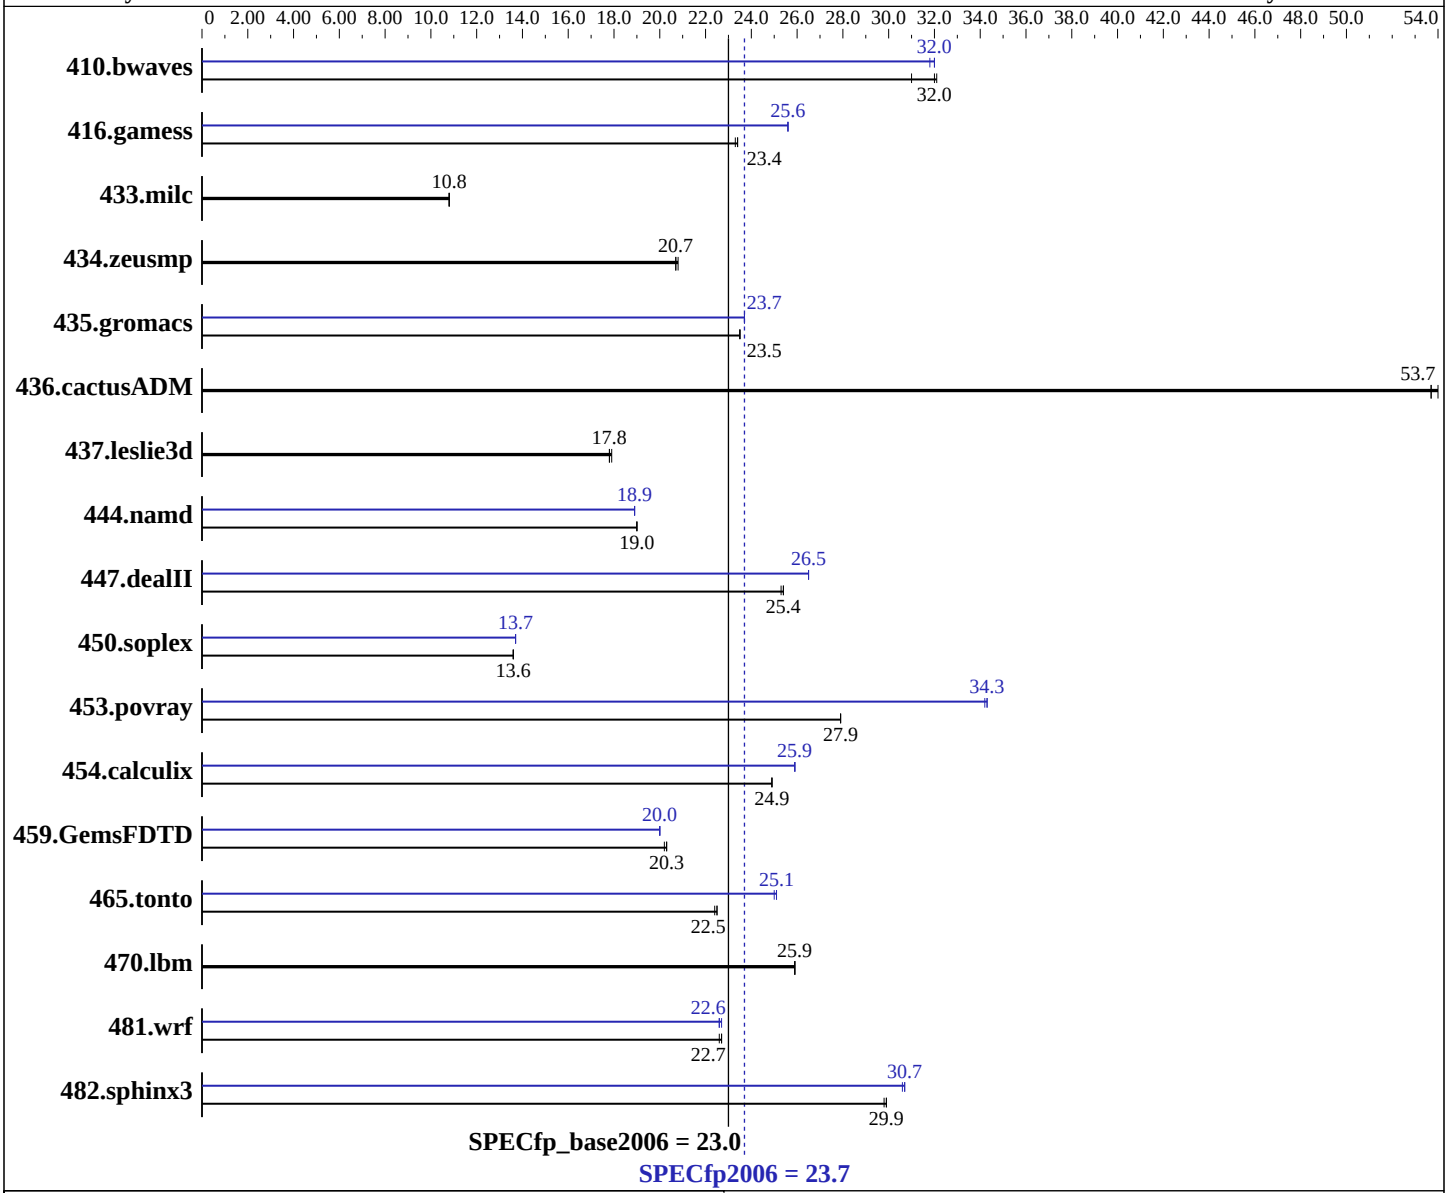

Hardware

CPU Name:	Intel Xeon X5270
CPU Characteristics:	1333 MHz Bus Speed
CPU MHz:	3500
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip

Continued on next page

Software

Operating System:	Windows Vista Business SP1 (64-bit)
Compiler:	Intel C++ Compiler for Intel 64, Version 11.0 Build 20080930 Package ID: w_cproc_p_11.0.061 Intel Visual Fortran Compiler for Intel 64, Version 11.0 Build 20080930 Package ID: w_cprof_p_11.0.061 Microsoft Visual Studio 2008 SP1
Auto Parallel:	Yes
File System:	NTFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision R5400 (Intel Xeon X5270, 3.50 GHz)

SPECfp2006 = 23.7

SPECfp_base2006 = 23.0

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Dec-2008
Hardware Availability: Oct-2008
Software Availability: Nov-2008

L3 Cache:	None
Other Cache:	None
Memory:	16 GB (4x4 GB DDR2-667 FB-DIMM, CL5)
Disk Subsystem:	1 x 320 GB SATA 7200 RPM
Other Hardware:	None

System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library 8.1 for x64

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	439	31.0	**424**	**32.0**	424	32.1	**425**	**32.0**	425	32.0	428	31.8
416.gamess	838	23.4	839	23.3	**838**	**23.4**	766	25.6	765	25.6	**765**	**25.6**
433.milc	847	10.8	**847**	**10.8**	847	10.8	847	10.8	**847**	**10.8**	847	10.8
434.zeusmp	439	20.7	438	20.8	**439**	**20.7**	439	20.7	438	20.8	**439**	**20.7**
435.gromacs	**304**	**23.5**	304	23.5	304	23.5	301	23.7	**301**	**23.7**	301	23.7
436.cactusADM	223	53.7	**223**	**53.7**	221	54.0	223	53.7	**223**	**53.7**	221	54.0
437.leslie3d	525	17.9	529	17.8	**528**	**17.8**	525	17.9	529	17.8	**528**	**17.8**
444.namd	**423**	**19.0**	423	19.0	423	19.0	424	18.9	**424**	**18.9**	424	18.9
447.dealII	451	25.3	**451**	**25.4**	451	25.4	432	26.5	431	26.5	**431**	**26.5**
450.soplex	613	13.6	613	13.6	**613**	**13.6**	610	13.7	610	13.7	**610**	**13.7**
453.povray	191	27.9	**191**	**27.9**	191	27.9	155	34.2	155	34.3	**155**	**34.3**
454.calculix	**331**	**24.9**	332	24.9	331	24.9	319	25.9	319	25.9	**319**	**25.9**
459.GemsFDTD	522	20.3	**524**	**20.3**	524	20.2	**530**	**20.0**	530	20.0	532	20.0
465.tonto	439	22.4	**438**	**22.5**	437	22.5	392	25.1	**393**	**25.1**	393	25.0
470.lbm	530	25.9	**531**	**25.9**	532	25.9	530	25.9	**531**	**25.9**	532	25.9
481.wrf	**493**	**22.7**	491	22.7	493	22.6	**493**	**22.6**	493	22.7	493	22.6
482.sphinx3	651	29.9	654	29.8	**652**	**29.9**	634	30.7	**636**	**30.7**	636	30.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Binaries were built on Windows Vista Ultimate (64-bit)

BIOS Settings
  Adjacent Cache Line Prefetch set to ON
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 /assume:underscore
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -Qlowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -Qlowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxSSE4.1 -Qauto-ilp32 -Qipo -O3 -Qprec-div- -Qparallel
-Qopt-prefetch /F512000000

C++ benchmarks:
-QxSSE4.1 -Qauto-ilp32 -Qipo -O3 -Qprec-div- -Qparallel
-Qopt-prefetch -Qcxx_features /F512000000 shlw64m.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-QxSSE4.1 -Qauto-ilp32 -Qipo -O3 -Qprec-div- -Qparallel
-Qopt-prefetch /F1000000000

Benchmarks using both Fortran and C:
-QxSSE4.1 -Qauto-ilp32 -Qipo -O3 -Qprec-div- -Qparallel
-Qopt-prefetch /F1000000000

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc9
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc9 -Qstd=c99 ifort
```

Peak Portability Flags

```
Same as Base Portability Flags
```

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `-QxSSE4.1 -Qauto-ilp32 -Qipo -O3 -Qprec-div- -Qunroll2 /F512000000`

C++ benchmarks:

444.namd: `-Qprof_gen`(pass 1) `-QxSSE4.1`(pass 2) `-Qauto-ilp32`(pass 2) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Oa /F512000000 shlw64m.lib -link /FORCE:MULTIPLE`

447.dealII: `-Qprof_gen`(pass 1) `-QxSSE4.1`(pass 2) `-Qauto-ilp32`(pass 2) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qansi-alias -Qscalar-rep- /F512000000 shlw64m.lib -link /FORCE:MULTIPLE`

450.soplex: `-Qprof_gen`(pass 1) `-QxSSE4.1 -Qauto-ilp32` `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- /F512000000 shlw64m.lib -link /FORCE:MULTIPLE`

453.povray: `-Qprof_gen`(pass 1) `-QxSSE4.1`(pass 2) `-Qauto-ilp32`(pass 2) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F512000000 shlw64m.lib -link /FORCE:MULTIPLE`

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -QxSSE4.1 -Qauto-ilp32 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel /F1000000000

416.gamess: -Qprof_gen(pass 1) -QxSSE4.1(pass 2) -Qauto-ilp32(pass 2) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -Qprof_gen(pass 1) -QxSSE4.1(pass 2) -Qauto-ilp32(pass 2) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch -Qparallel /F1000000000

465.tonto: -Qprof_gen(pass 1) -QxSSE4.1(pass 2) -Qauto-ilp32(pass 2) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -Qprof_gen(pass 1) -QxSSE4.1(pass 2) -Qauto-ilp32(pass 2) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

436.cactusADM: basepeak = yes

454.calculix: -QxSSE4.1 -Qauto-ilp32 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: -QxSSE4.1 -Qauto-ilp32 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel /F1000000000

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/dell.ic11.0.windows.flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/dell.ic11.0.windows.flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:40:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 December 2008.