SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-m6
(Intel Xeon E5205)

SPECint®_rate2006 = 29.3

SPECint_rate_base2006 = 27.6

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Dec-2008
Hardware Availability: Dec-2008
Software Availability: Nov-2008

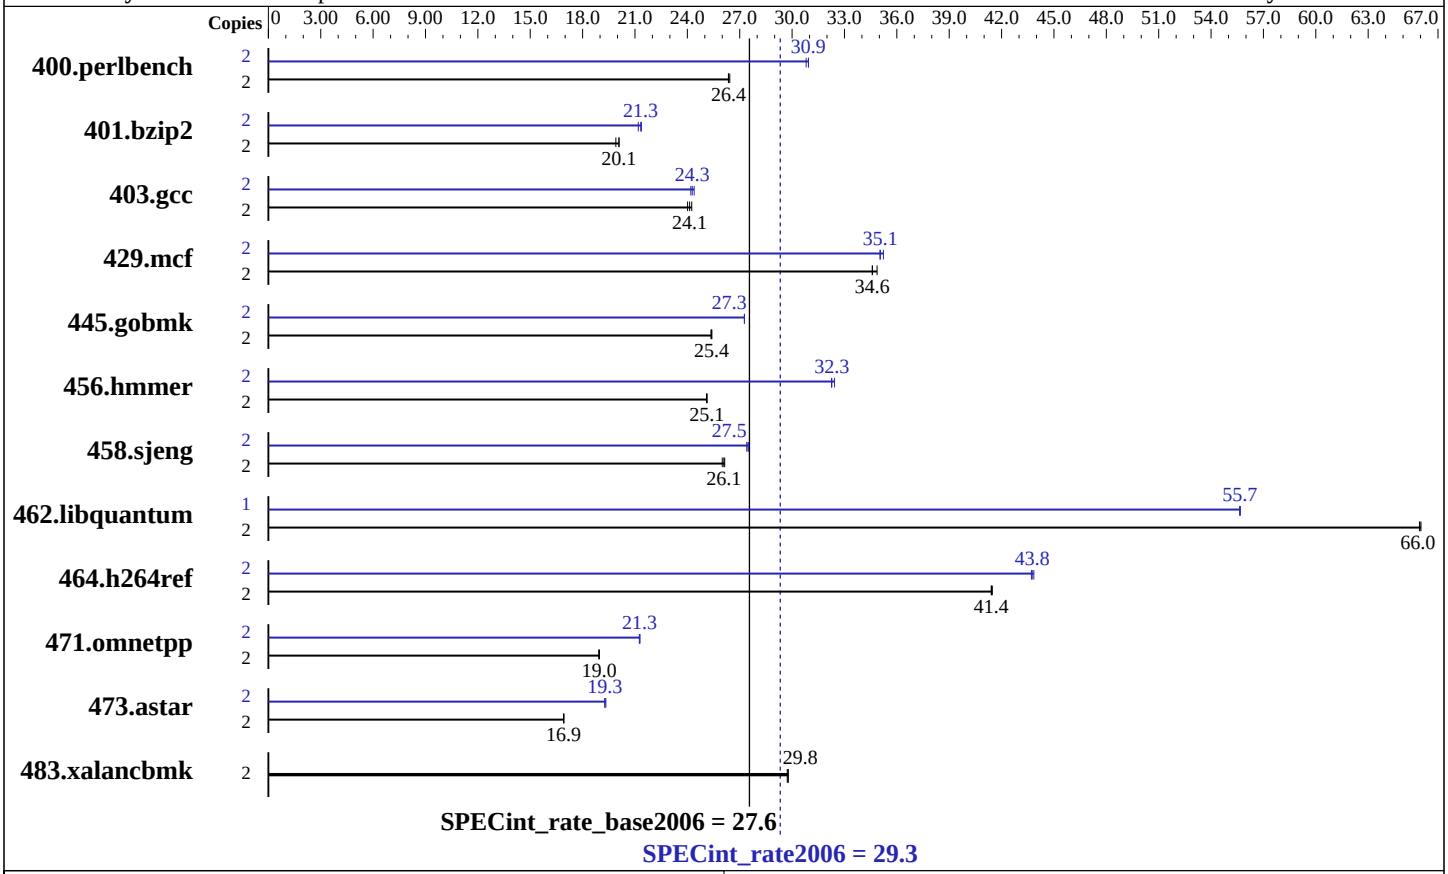

Hardware

CPU Name:	Intel Xeon E5205
CPU Characteristics:	1066 MHz system bus
CPU MHz:	1867
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x73.2 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_p_11.0.074
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-m6
(Intel Xeon E5205)

SPECint_rate2006 = 29.3

SPECint_rate_base2006 = 27.6

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Dec-2008
Hardware Availability: Dec-2008
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	739	26.4	**741**	**26.4**	741	26.4	2	**632**	**30.9**	632	30.9	634	30.8
401.bzip2	2	**961**	**20.1**	970	19.9	961	20.1	2	**905**	**21.3**	903	21.4	911	21.2
403.gcc	2	670	24.0	664	24.3	**667**	**24.1**	2	665	24.2	**663**	**24.3**	660	24.4
429.mcf	2	523	34.9	527	34.6	**527**	**34.6**	2	**520**	**35.1**	518	35.2	521	35.0
445.gobmk	2	828	25.4	**826**	**25.4**	826	25.4	2	769	27.3	**769**	**27.3**	769	27.3
456.hmmer	2	744	25.1	743	25.1	**743**	**25.1**	2	575	32.4	578	32.3	**578**	**32.3**
458.sjeng	2	**928**	**26.1**	931	26.0	926	26.1	2	880	27.5	883	27.4	**881**	**27.5**
462.libquantum	2	628	65.9	628	66.0	**628**	**66.0**	1	372	55.6	372	55.7	**372**	**55.7**
464.h264ref	2	1069	41.4	**1069**	**41.4**	1067	41.5	2	1013	43.7	1009	43.8	**1012**	**43.8**
471.omnetpp	2	660	18.9	660	19.0	**660**	**19.0**	2	**588**	**21.3**	587	21.3	588	21.2
473.astar	2	829	16.9	**830**	**16.9**	830	16.9	2	726	19.3	729	19.3	**728**	**19.3**
483.xalancbmk	2	**464**	**29.8**	464	29.7	463	29.8	2	**464**	**29.8**	464	29.7	463	29.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset was used to bind processes to cores except
 for 462.libquantum peak
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

Continued on next page

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/074/bin/intel64/icc
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/074/bin/intel64/icc
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -parallel -par-runtime-control -opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.html`
`http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.xml`
`http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:49:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 January 2009.