SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 212 X2 (Intel Xeon E5410, 2.33 GHz)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 36.9

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Dec-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

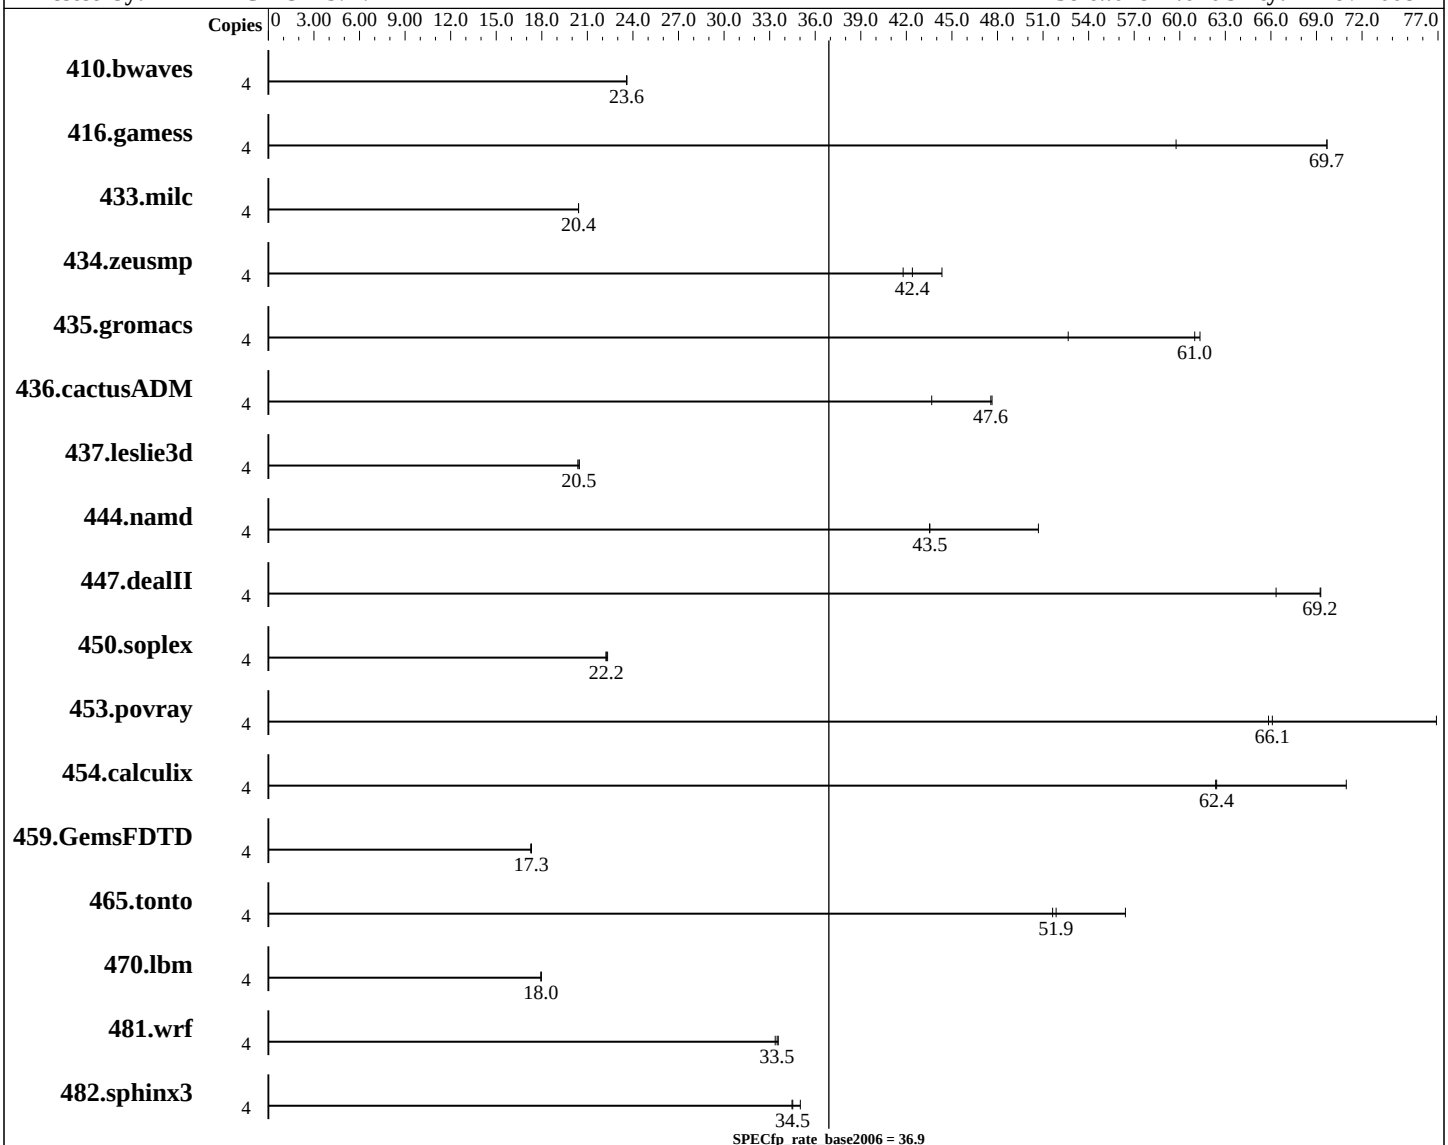

Hardware

CPU Name:	Intel Xeon E5410
CPU Characteristics:	1333 MHz System Bus
CPU MHz:	2333
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) with SP2, kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 212 X2 (Intel Xeon E5410, 2.33 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 36.9

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Dec-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x 2 GB, PC2-5300, CL 5-5-5, FB ECC)
Disk Subsystem: 500 GB SATA, 7200 RPM
Other Hardware: None

Peak Pointers: Not Applicable
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	2304	23.6	2305	23.6	**2304**	**23.6**							
416.gamess	4	1124	69.7	1311	59.8	**1124**	**69.7**							
433.milc	4	1798	20.4	1799	20.4	**1798**	**20.4**							
434.zeusmp	4	**859**	**42.4**	871	41.8	821	44.3							
435.gromacs	4	466	61.3	542	52.7	**468**	**61.0**							
436.cactusADM	4	**1005**	**47.6**	1095	43.7	1003	47.6							
437.leslie3d	4	**1838**	**20.5**	1846	20.4	1837	20.5							
444.namd	4	737	43.5	**737**	**43.5**	633	50.7							
447.dealII	4	**661**	**69.2**	660	69.3	690	66.3							
450.soplex	4	1501	22.2	**1499**	**22.2**	1494	22.3							
453.povray	4	323	65.8	**322**	**66.1**	277	76.9							
454.calculix	4	529	62.4	**529**	**62.4**	465	71.0							
459.GemsFDTD	4	2457	17.3	**2451**	**17.3**	2451	17.3							
465.tonto	4	762	51.6	**759**	**51.9**	698	56.4							
470.lbm	4	**3062**	**18.0**	3062	17.9	3059	18.0							
481.wrf	4	**1334**	**33.5**	1339	33.4	1331	33.6							
482.sphinx3	4	**2258**	**34.5**	2262	34.5	2226	35.0							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Platform Notes

```
This result is measured on ACTINA SOLAR 222 X2.
Note that the ACTINA SOLAR 222 X2 and  ACTINA SOLAR 212 X2
are electrically equivalent.
```

General Notes

```
 taskset was used to bind processes to cores
 'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.02.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.02.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:50:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 January 2009.