SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 E1
(Intel Xeon E7430, 2.13 GHz)

SPECfp®_rate2006 = 59.3

SPECfp_rate_base2006 = 56.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Feb-2009
Hardware Availability: Nov-2008
Software Availability: Nov-2008

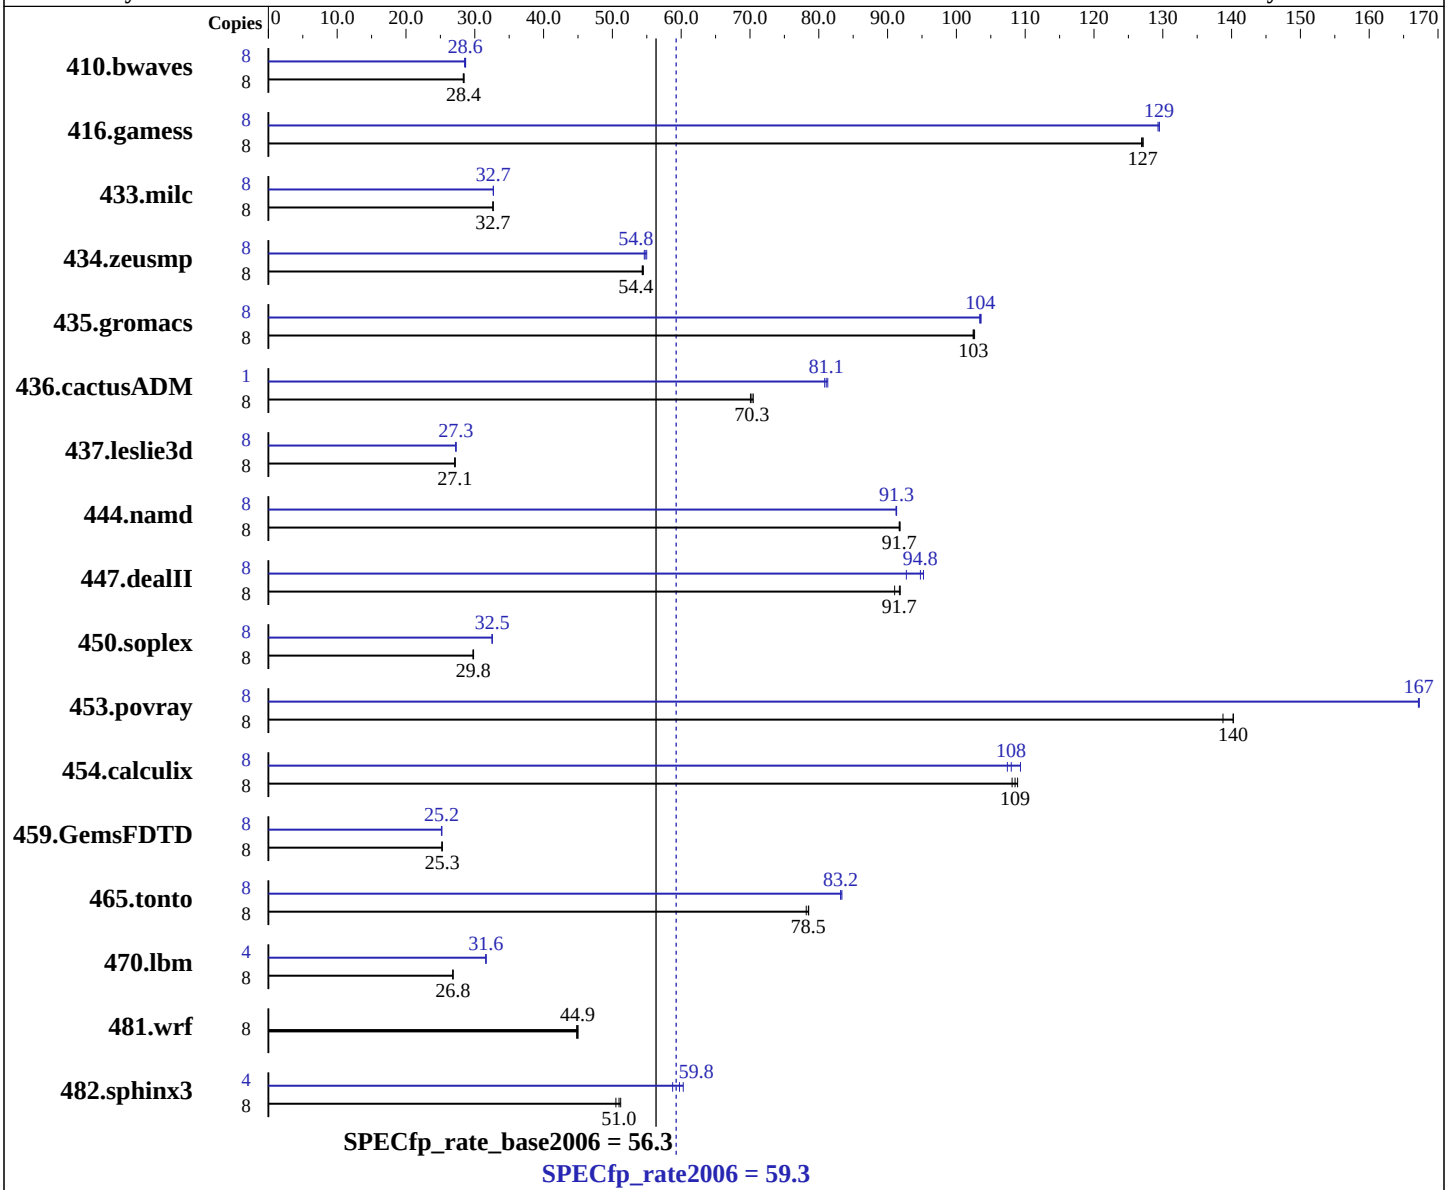

Hardware

CPU Name:	Intel Xeon E7430
CPU Characteristics:	1066 MHz system bus
CPU MHz:	2133
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2,3,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip, 3 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 E1
(Intel Xeon E7430, 2.13 GHz)

SPECfp_rate2006 = 59.3

SPECfp_rate_base2006 = 56.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Feb-2009
Hardware Availability: Nov-2008
Software Availability: Nov-2008

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (16 x 2GB DDR2-667 FBDIMM)
Disk Subsystem: 1x146 GB SAS, 10000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	**3829**	**28.4**	3822	28.4	3838	28.3	8	3813	28.5	3792	28.7	**3795**	**28.6**
416.gamess	8	1232	127	1234	127	**1233**	**127**	8	1210	129	**1210**	**129**	1211	129
433.milc	8	2251	32.6	**2248**	**32.7**	2248	32.7	8	2246	32.7	**2246**	**32.7**	2245	32.7
434.zeusmp	8	**1339**	**54.4**	1336	54.5	1340	54.3	8	1332	54.6	**1329**	**54.8**	1324	55.0
435.gromacs	8	558	102	556	103	**557**	**103**	8	551	104	553	103	**552**	**104**
436.cactusADM	8	1356	70.5	1364	70.1	**1360**	**70.3**	1	**147**	**81.1**	147	81.3	148	80.9
437.leslie3d	8	2769	27.2	2778	27.1	**2773**	**27.1**	8	2762	27.2	**2759**	**27.3**	2756	27.3
444.namd	8	699	91.8	**700**	**91.7**	700	91.7	8	703	91.2	**703**	**91.3**	703	91.3
447.dealII	8	996	91.8	1005	91.0	**998**	**91.7**	8	961	95.2	**966**	**94.8**	987	92.7
450.soplex	8	2244	29.7	**2240**	**29.8**	2237	29.8	8	2052	32.5	2050	32.5	**2050**	**32.5**
453.povray	8	**304**	**140**	303	140	307	139	8	254	167	**255**	**167**	255	167
454.calculix	8	611	108	**608**	**109**	606	109	8	**611**	**108**	614	107	604	109
459.GemsFDTD	8	3367	25.2	3358	25.3	**3360**	**25.3**	8	3375	25.2	**3369**	**25.2**	3368	25.2
465.tonto	8	1002	78.5	**1003**	**78.5**	1007	78.2	8	944	83.4	**946**	**83.2**	946	83.2
470.lbm	8	4098	26.8	**4097**	**26.8**	4097	26.8	4	**1738**	**31.6**	1737	31.6	1738	31.6
481.wrf	8	1995	44.8	**1988**	**44.9**	1985	45.0	8	1995	44.8	**1988**	**44.9**	1985	45.0
482.sphinx3	8	3045	51.2	**3059**	**51.0**	3087	50.5	4	1293	60.3	1327	58.8	**1305**	**59.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset was used to bind processes to cores except
 for 436.cactusADM peak
 For peak modules using 1/2 the number of available cores, copies
 were each assigned to a single L2 cache using mysubmit.pl script.
 See the flags description file for mysubmit.pl details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
```

Platform Notes

```
BIOS Settings:
Adjacent Cache Line Prefetch = Disabled
Hardware Prefetcher = Disabled
High Bandwidth option = Enabled
```

General Notes

```
The NEC Express5800/R140a-4(Intel Xeon E7430) and
the Bull NovaScale R480 E1(Intel Xeon E7430, 2.13 GHz) models are electronically equivalent.
The results have been measured on a Bull NovaScale R480 E1(Intel Xeon E7430, 2.13 GHz) model.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Fortran benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

482.sphinx3: `/opt/intel/Compiler/11.0/042/bin/ia32/icc -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/Compiler/11.0/042/bin/ia32/icpc -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/Compiler/11.0/042/bin/ia32/ifort -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib -I/opt/intel/Compiler/11.0/042/ipp/ia32/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`

Continued on next page

Peak Portability Flags (Continued)

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static

Continued on next page

Peak Optimization Flags (Continued)

437.leslie3d: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `-xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.00.html`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.00.xml`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:31:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 March 2009.