



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint[®]_rate2006 = 257

PowerEdge T610 (Intel Xeon X5570, 2.93 GHz)

SPECint_rate_base2006 = 237

CPU2006 license: 55


Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Mar-2009

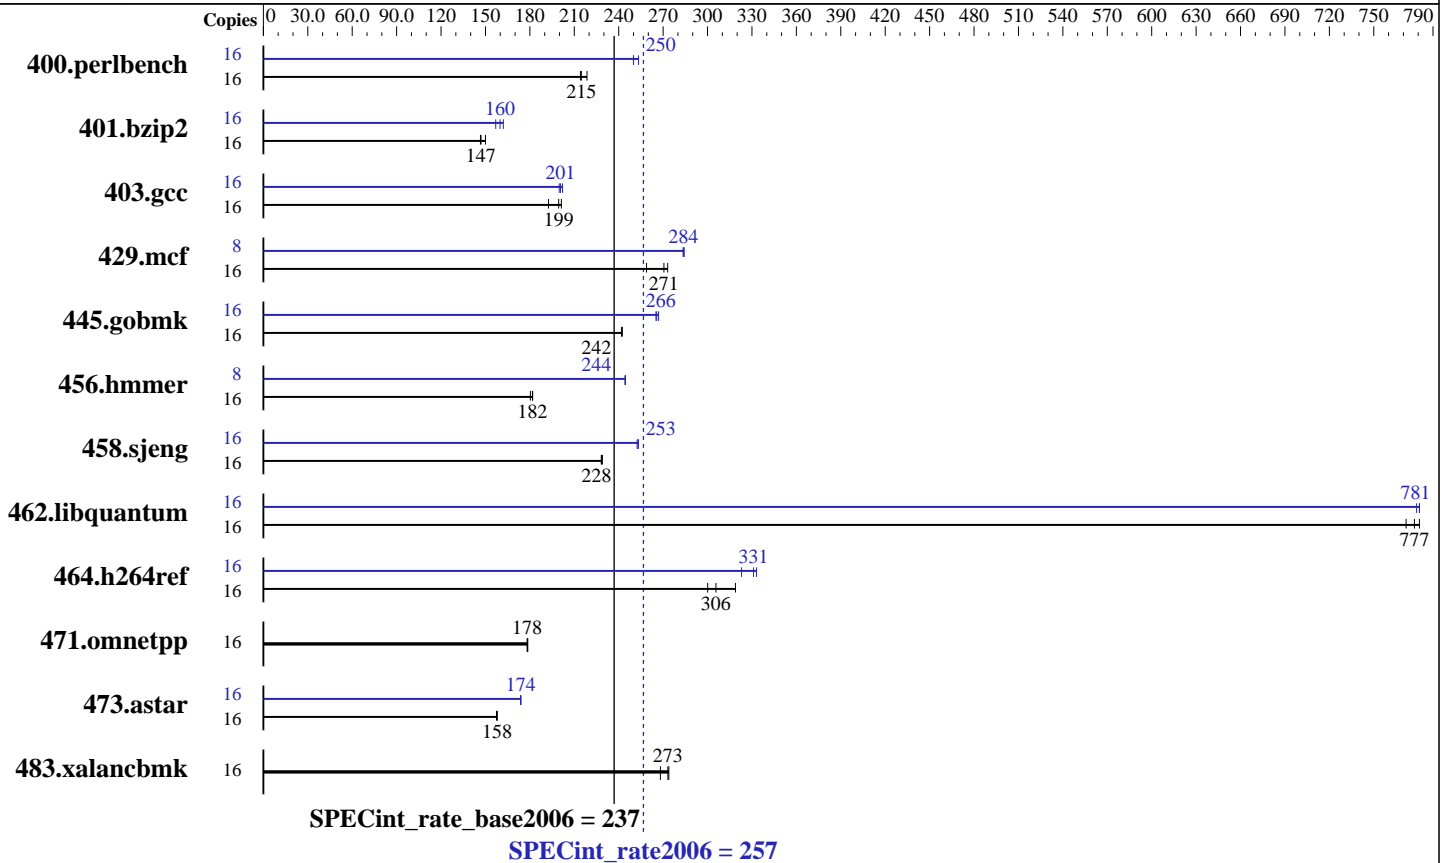

Hardware

CPU Name: Intel Xeon X5570
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB DDR3-1333 DR RDIMM)
 Disk Subsystem: 1 x 73 GB 10000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 257

PowerEdge T610 (Intel Xeon X5570, 2.93 GHz)

SPECint_rate_base2006 = 237

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Mar-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	730	214	715	219	<u>728</u>	<u>215</u>	16	625	250	<u>625</u>	<u>250</u>	617	253
401.bzip2	16	1053	147	<u>1051</u>	<u>147</u>	1029	150	16	953	162	984	157	<u>966</u>	<u>160</u>
403.gcc	16	<u>646</u>	<u>199</u>	669	193	640	201	16	<u>642</u>	<u>201</u>	645	200	637	202
429.mcf	16	564	259	<u>539</u>	<u>271</u>	534	273	8	257	284	<u>257</u>	<u>284</u>	257	284
445.gobmk	16	<u>694</u>	<u>242</u>	694	242	692	242	16	<u>632</u>	<u>266</u>	629	267	633	265
456.hammer	16	828	180	821	182	<u>821</u>	<u>182</u>	8	305	245	<u>305</u>	<u>244</u>	305	244
458.sjeng	16	<u>847</u>	<u>228</u>	848	228	845	229	16	767	252	<u>765</u>	<u>253</u>	764	253
462.libquantum	16	425	781	430	772	<u>426</u>	<u>777</u>	16	<u>425</u>	<u>781</u>	426	779	425	781
464.h264ref	16	<u>1158</u>	<u>306</u>	1110	319	1180	300	16	<u>1070</u>	<u>331</u>	1063	333	1096	323
471.omnetpp	16	561	178	560	179	<u>561</u>	<u>178</u>	16	561	178	560	179	<u>561</u>	<u>178</u>
473.astar	16	713	157	<u>712</u>	<u>158</u>	711	158	16	646	174	646	174	<u>646</u>	<u>174</u>
483.xalanbmk	16	<u>404</u>	<u>273</u>	403	274	412	268	16	<u>404</u>	<u>273</u>	403	274	412	268

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalanbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3 -opt-prefetch

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 257

PowerEdge T610 (Intel Xeon X5570, 2.93 GHz)

SPECint_rate_base2006 = 237

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Mar-2009

Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 257

PowerEdge T610 (Intel Xeon X5570, 2.93 GHz)

SPECint_rate_base2006 = 237

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Mar-2009

Peak Optimization Flags (Continued)

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-W1,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 257

PowerEdge T610 (Intel Xeon X5570, 2.93 GHz)

SPECint_rate_base2006 = 237

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Mar-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:28:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 March 2009.