



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECfp®_rate2006 = 71.8

NTT Tytan S8 Series (Intel Xeon E5410)

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9013


Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

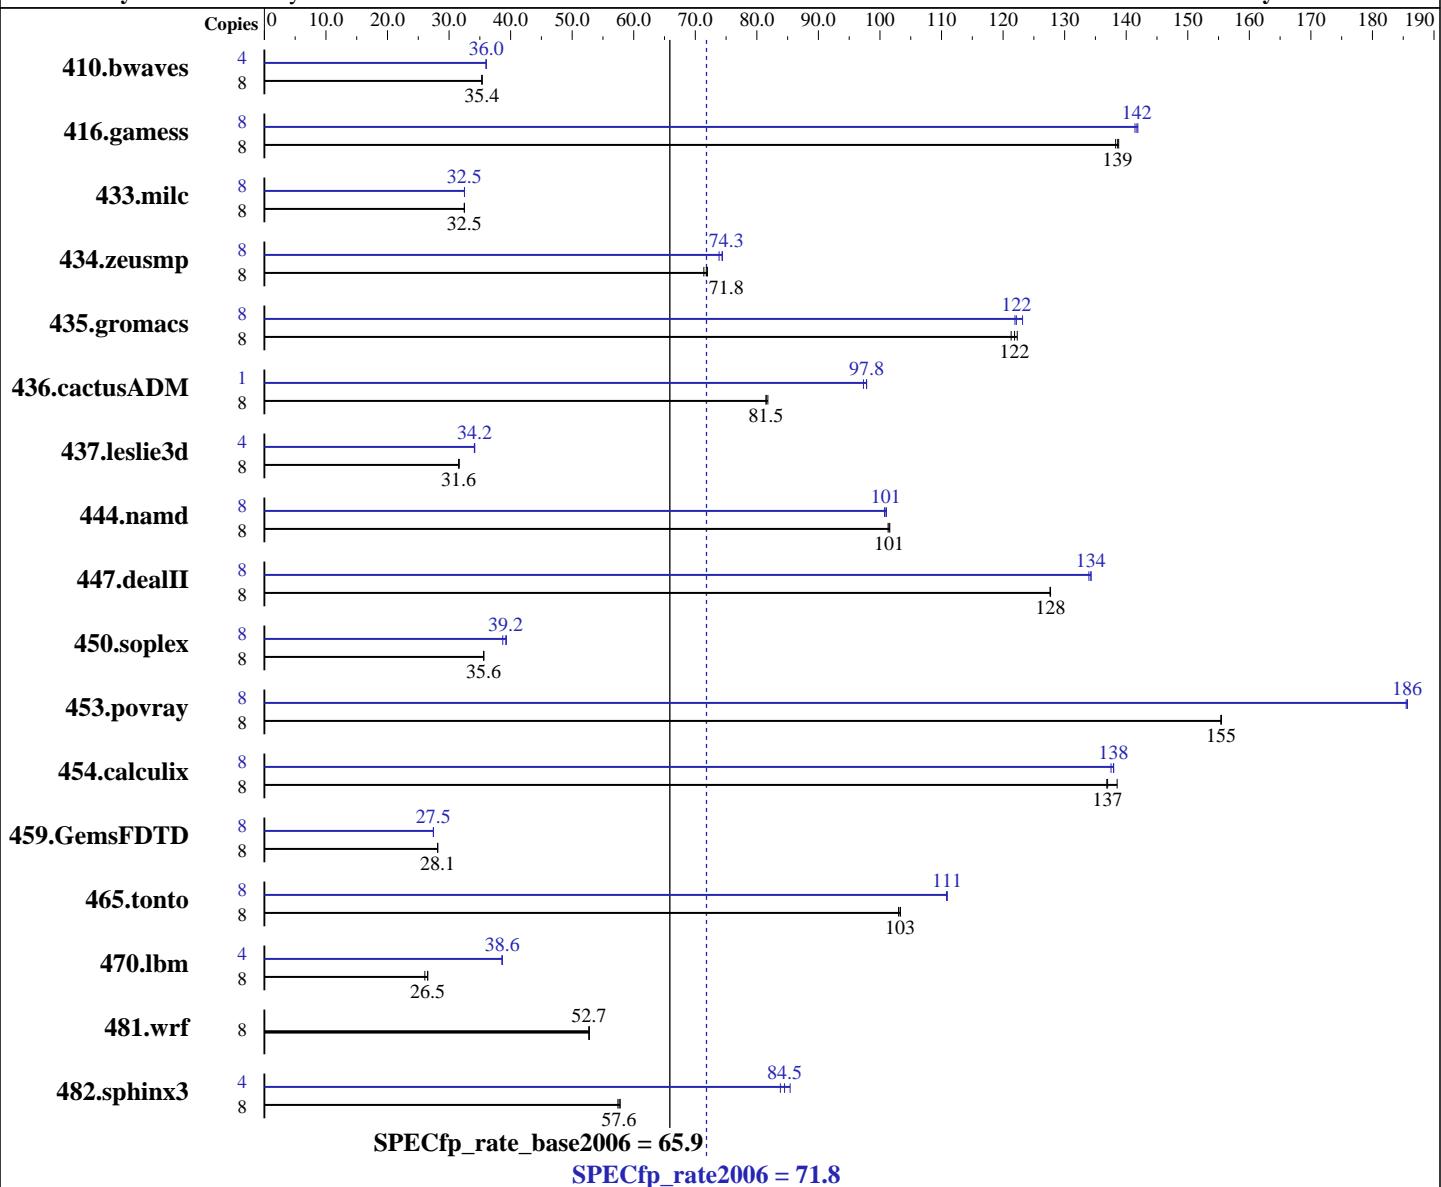

Hardware

CPU Name: Intel Xeon E5410
CPU Characteristics: 2.33 GHz, 2x6 MB P2 shared, 1333 MHz System Bus
CPU MHz: 2333
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Software

Operating System: SuSe Linux Enterprise Server 10 SP2, Kernel 2.6.16.60-0.21-smp
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066, l_cprof_p_11.0.066
Auto Parallel: Yes
File System: ReiserFS
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECfp_rate2006 = 71.8

NTT Tytan S8 Series (Intel Xeon E5410)

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9013

Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (4 x 4GB DDR2-667 FBDIMM)
Disk Subsystem: 300 GB SATA, 7200RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 8 | 3075 | 35.4 | 3073 | 35.4 | 3079 | 35.3 | 4 | 1508 | 36.0 | 1508 | 36.0 | 1509 | 36.0 |
| 416.gamess | 8 | 1133 | 138 | 1130 | 139 | 1129 | 139 | 8 | 1105 | 142 | 1108 | 141 | 1104 | 142 |
| 433.milc | 8 | 2261 | 32.5 | 2260 | 32.5 | 2260 | 32.5 | 8 | 2259 | 32.5 | 2260 | 32.5 | 2259 | 32.5 |
| 434.zeusmp | 8 | 1020 | 71.4 | 1011 | 72.0 | 1014 | 71.8 | 8 | 979 | 74.3 | 978 | 74.4 | 986 | 73.9 |
| 435.gromacs | 8 | 471 | 121 | 469 | 122 | 467 | 122 | 8 | 464 | 123 | 468 | 122 | 468 | 122 |
| 436.cactusADM | 8 | 1173 | 81.5 | 1173 | 81.5 | 1169 | 81.8 | 1 | 122 | 97.8 | 122 | 97.8 | 123 | 97.3 |
| 437.leslie3d | 8 | 2381 | 31.6 | 2377 | 31.6 | 2383 | 31.6 | 4 | 1101 | 34.2 | 1102 | 34.1 | 1101 | 34.2 |
| 444.namd | 8 | 633 | 101 | 632 | 101 | 632 | 102 | 8 | 637 | 101 | 635 | 101 | 635 | 101 |
| 447.dealII | 8 | 717 | 128 | 717 | 128 | 717 | 128 | 8 | 682 | 134 | 681 | 134 | 683 | 134 |
| 450.soplex | 8 | 1874 | 35.6 | 1872 | 35.6 | 1872 | 35.6 | 8 | 1723 | 38.7 | 1697 | 39.3 | 1701 | 39.2 |
| 453.povray | 8 | 274 | 155 | 274 | 155 | 274 | 155 | 8 | 229 | 186 | 229 | 186 | 229 | 185 |
| 454.calculix | 8 | 476 | 139 | 482 | 137 | 482 | 137 | 8 | 478 | 138 | 480 | 138 | 478 | 138 |
| 459.GemsFDTD | 8 | 3017 | 28.1 | 3015 | 28.2 | 3015 | 28.1 | 8 | 3092 | 27.4 | 3090 | 27.5 | 3090 | 27.5 |
| 465.tonto | 8 | 764 | 103 | 762 | 103 | 762 | 103 | 8 | 710 | 111 | 710 | 111 | 710 | 111 |
| 470.lbm | 8 | 4217 | 26.1 | 4143 | 26.5 | 4143 | 26.5 | 4 | 1423 | 38.6 | 1423 | 38.6 | 1423 | 38.6 |
| 481.wrf | 8 | 1694 | 52.7 | 1695 | 52.7 | 1693 | 52.8 | 8 | 1694 | 52.7 | 1695 | 52.7 | 1693 | 52.8 |
| 482.sphinx3 | 8 | 2697 | 57.8 | 2705 | 57.6 | 2715 | 57.4 | 4 | 930 | 83.8 | 913 | 85.4 | 923 | 84.5 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind processes to cores except
for 436.cactusADM peak

Operating System Notes

OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECfp_rate2006 = 71.8

NTT Tytan S8 Series (Intel Xeon E5410)

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9013

Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECfp_rate2006 = 71.8

NTT Tytan S8 Series (Intel Xeon E5410)

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9013

Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  444.namd: -DSPEC_CPU_LP64
  447.dealII: -DSPEC_CPU_LP64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
           -no-prec-div -static -fno-alias

  470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
           -auto-ilp32

  482.sphinx3: -m32 -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
```

C++ benchmarks:

```
444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
           -no-prec-div -static -fno-alias -auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECfp_rate2006 = 71.8

NTT Tytan S8 Series (Intel Xeon E5410)

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9013

Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

Peak Optimization Flags (Continued)

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep

450.soplex: -m32 -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo
-O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static

437.leslie3d: -m32 -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo
-O3 -no-prec-div -static -opt-malloc-options=3
-opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xsse4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.03.html>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.03.xml>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECfp_rate2006 = 71.8

NTT Tytan S8 Series (Intel Xeon E5410)

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9013

Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 01:41:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 April 2009.