SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

NTT Tytan S8 Series (Intel Xeon E5410)

SPECint®2006 = 22.7

SPECint_base2006 = 19.9

CPU2006 license: 9013
Test sponsor: NTT System S. A.
Tested by: NTT System S. A.

Test date: Jan-2009
Hardware Availability: Dec-2008
Software Availability: Dec-2008

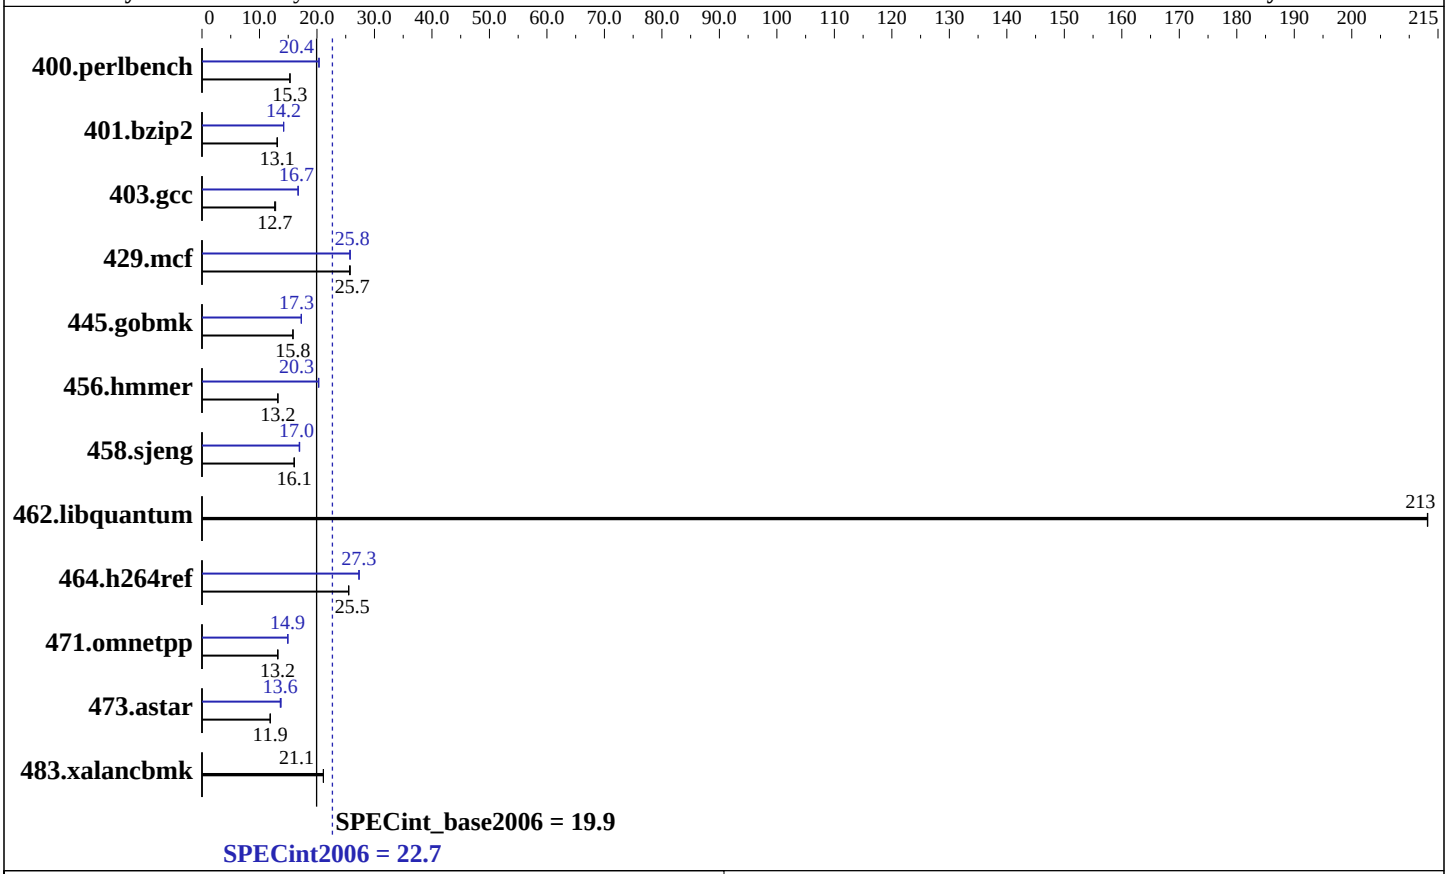

Hardware

CPU Name:	Intel Xeon E5410
CPU Characteristics:	2.33 GHz, 2x6 MB P2 shared, 1333 MHz System Bus
CPU MHz:	2333
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (4 x 4GB DDR2-667 FBDIMM)
Disk Subsystem:	300 GB SATA, 7200RPM
Other Hardware:	None

Software

Operating System:	SuSe Linux Enterprise Server 10 SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

NTT Tytan S8 Series (Intel Xeon E5410)

SPECint2006 = 22.7

SPECint_base2006 = 19.9

CPU2006 license: 9013
Test sponsor: NTT System S. A.
Tested by: NTT System S. A.

Test date: Jan-2009
Hardware Availability: Dec-2008
Software Availability: Dec-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	638	15.3	**639**	**15.3**	639	15.3	480	20.4	**480**	**20.4**	481	20.3
401.bzip2	735	13.1	**737**	**13.1**	740	13.0	679	14.2	680	14.2	**679**	**14.2**
403.gcc	**635**	**12.7**	636	12.7	628	12.8	481	16.7	482	16.7	**481**	**16.7**
429.mcf	355	25.7	354	25.8	**354**	**25.7**	**354**	**25.8**	354	25.8	355	25.7
445.gobmk	663	15.8	**663**	**15.8**	663	15.8	607	17.3	607	17.3	**607**	**17.3**
456.hmmer	**707**	**13.2**	707	13.2	707	13.2	**460**	**20.3**	460	20.3	460	20.3
458.sjeng	756	16.0	753	16.1	**753**	**16.1**	712	17.0	716	16.9	**713**	**17.0**
462.libquantum	97.2	213	97.2	213	**97.2**	**213**	97.2	213	97.2	213	**97.2**	**213**
464.h264ref	**867**	**25.5**	868	25.5	867	25.5	810	27.3	811	27.3	**810**	**27.3**
471.omnetpp	475	13.2	**475**	**13.2**	473	13.2	419	14.9	419	14.9	**419**	**14.9**
473.astar	591	11.9	**591**	**11.9**	592	11.9	510	13.8	**515**	**13.6**	515	13.6
483.xalancbmk	**327**	**21.1**	327	21.1	327	21.1	**327**	**21.1**	327	21.1	327	21.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -par-runtime-control -opt-prefetch`

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/Compiler/11.0/066/bin/intel64/icc`

456.hmmer: `/opt/intel/Compiler/11.0/066/bin/intel64/icc`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -ansi-alias -opt-prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-prefetch -ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: `-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3`

429.mcf: `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4`

462.libquantum: `basepeak = yes`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.01.html`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.01.xml`
`http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

NTT Tytan S8 Series (Intel Xeon E5410)

SPECint2006 = 22.7

SPECint_base2006 = 19.9

CPU2006 license: 9013
Test sponsor: NTT System S. A.
Tested by: NTT System S. A.

Test date: Jan-2009
Hardware Availability: Dec-2008
Software Availability: Dec-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:42:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 April 2009.