SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX203 (Intel Xeon X5560)

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 186

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

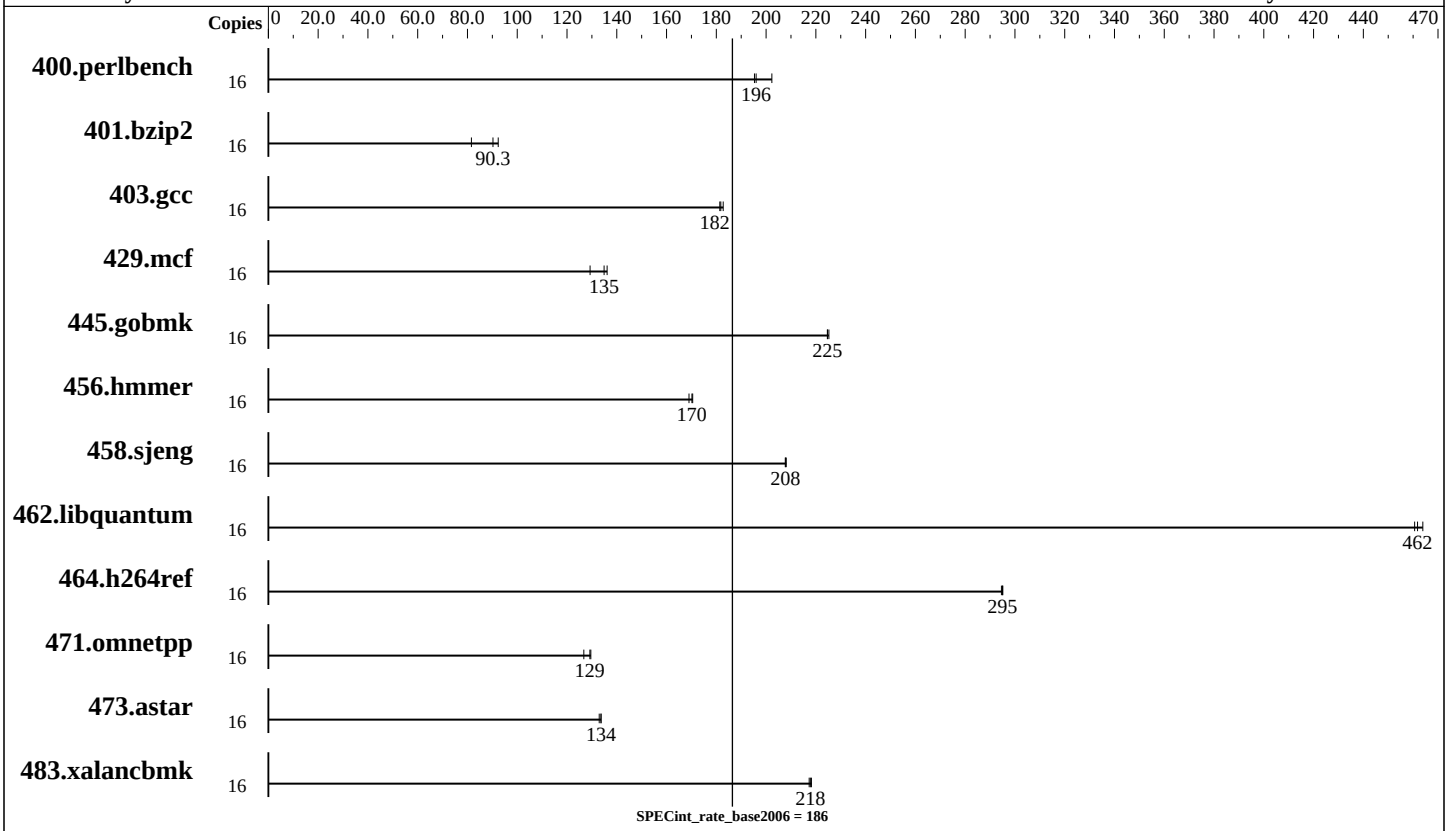

Hardware

CPU Name:	Intel Xeon X5560
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz, 6.4 GT/s QPI
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	12 GB (6 x 2GB DDR3-1066, CL 9, ECC)
Disk Subsystem:	1 x 160 GB SATA-2, 7200RPM
Other Hardware:	None

Software

Operating System:	SuSe Linux SLES10 SP2, Kernel 2.6.16.60-0.34-smp for x86_64
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.081
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	Not Applicable
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX203 (Intel Xeon X5560)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 186

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	773	202	800	195	**798**	**196**							
401.bzip2	16	1672	92.4	1892	81.6	**1711**	**90.3**							
403.gcc	16	**708**	**182**	705	183	710	181							
429.mcf	16	1129	129	1072	136	**1082**	**135**							
445.gobmk	16	745	225	747	225	**747**	**225**							
456.hmmer	16	875	171	883	169	**877**	**170**							
458.sjeng	16	932	208	**931**	**208**	930	208							
462.libquantum	16	720	461	715	464	**718**	**462**							
464.h264ref	16	1200	295	**1200**	**295**	1202	295							
471.omnetpp	16	789	127	**774**	**129**	772	130							
473.astar	16	845	133	840	134	**840**	**134**							
483.xalancbmk	16	**507**	**218**	506	218	508	217							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

General Notes

```
This result was measured on the Servidor Itautec LX203.
The Servidor Itautec LX203 and the Servidor Itautec LX213 are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/sh/SmartHeap_8.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:55:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 April 2009.