SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7450)

SPECint®_rate2006 = 194

SPECint_rate_base2006 = 182

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Apr-2009
Hardware Availability: Feb-2009
Software Availability: Nov-2008

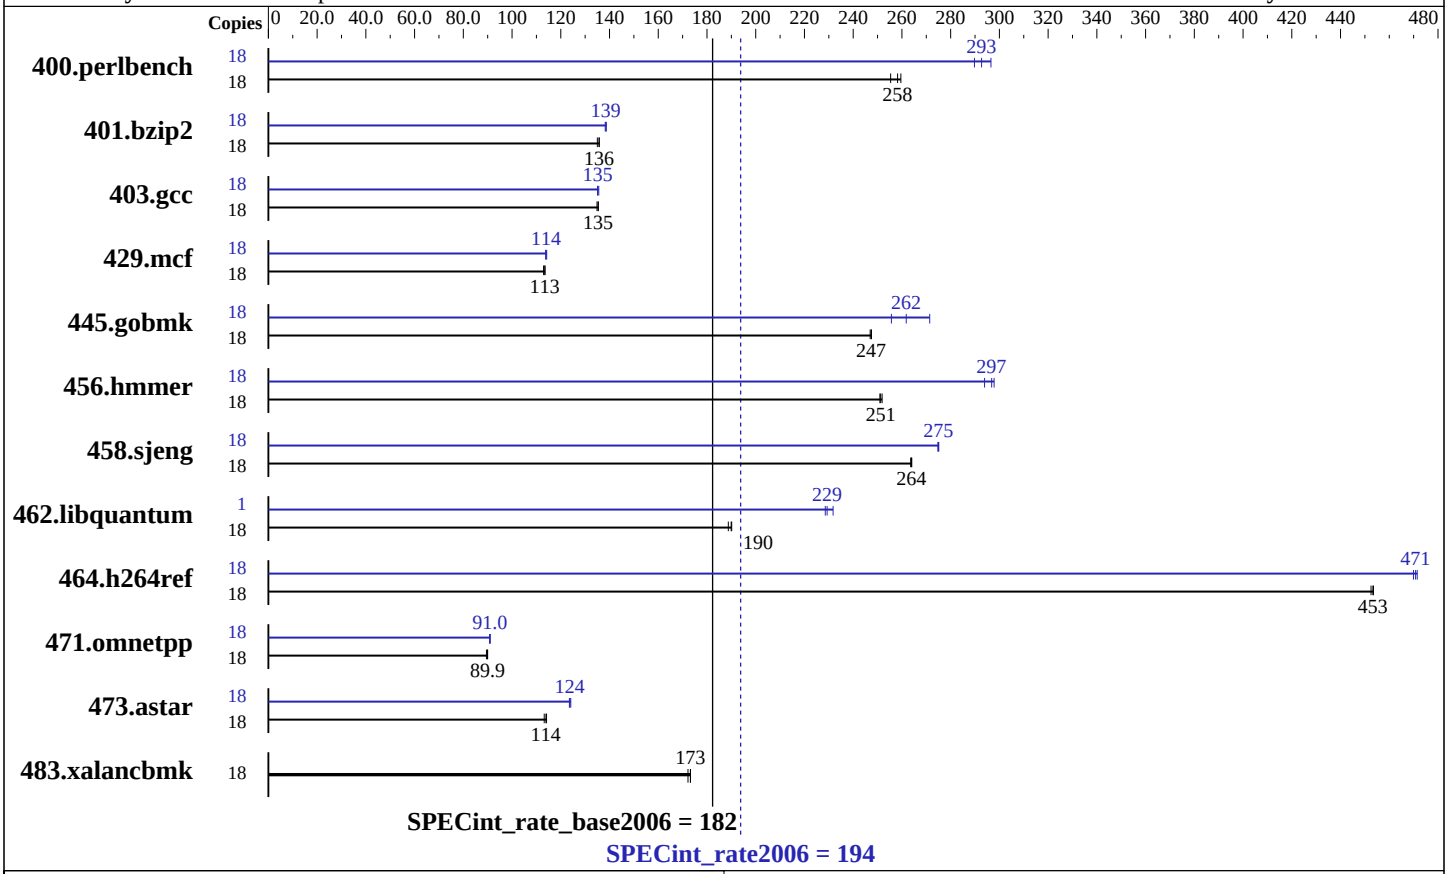

Hardware

CPU Name:	Intel Xeon E7450
CPU Characteristics:	1066 MHz system bus
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	18 cores, 3 chips, 6 cores/chip
CPU(s) orderable:	1,2,3,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	9 MB I+D on chip per chip, 3 MB shared / 2 cores
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (16x4 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x146.5 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_p_11.0.074
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7450)

SPECint_rate2006 = 194

SPECint_rate_base2006 = 182

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Apr-2009
Hardware Availability: Feb-2009
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	18	**681**	**258**	689	255	678	260	18	607	290	593	297	**601**	**293**
401.bzip2	18	1287	135	**1280**	**136**	1279	136	18	1253	139	**1254**	**139**	1257	138
403.gcc	18	1074	135	1070	135	**1071**	**135**	18	1073	135	**1072**	**135**	1069	136
429.mcf	18	1454	113	**1447**	**113**	1446	114	18	1443	114	1437	114	**1440**	**114**
445.gobmk	18	**763**	**247**	763	247	765	247	18	696	271	**721**	**262**	738	256
456.hmmer	18	669	251	**668**	**251**	667	252	18	571	294	564	298	**566**	**297**
458.sjeng	18	825	264	826	264	**825**	**264**	18	793	275	**792**	**275**	792	275
462.libquantum	18	1976	189	**1964**	**190**	1961	190	1	90.7	229	**90.4**	**229**	89.4	232
464.h264ref	18	880	453	**879**	**453**	878	454	18	**846**	**471**	845	471	848	470
471.omnetpp	18	1257	89.5	**1251**	**89.9**	1250	90.0	18	1239	90.8	1236	91.0	**1237**	**91.0**
473.astar	18	1116	113	**1109**	**114**	1107	114	18	1023	124	**1021**	**124**	1018	124
483.xalancbmk	18	721	172	**717**	**173**	717	173	18	721	172	**717**	**173**	717	173

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset was used to bind processes to cores except
 for 462.libquantum peak
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
```

Platform Notes

```
Bios settings:
Hardware Prefetcher:            Disabled
Adjacent Cache Line Prefetch:   Disabled
FSB High Bandwidth Optimization: Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/074/bin/intel64/icc
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/074/bin/intel64/icc
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSSE3 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll4

462.libquantum: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -parallel -par-runtime-control -opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.html`
`http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.xml`
`http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:40:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 May 2009.