SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix XE 270 (Intel Xeon X5570, 2.93 GHz)

SPECint®2006 =	35.9
SPECint_base2006 =	32.0

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Apr-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

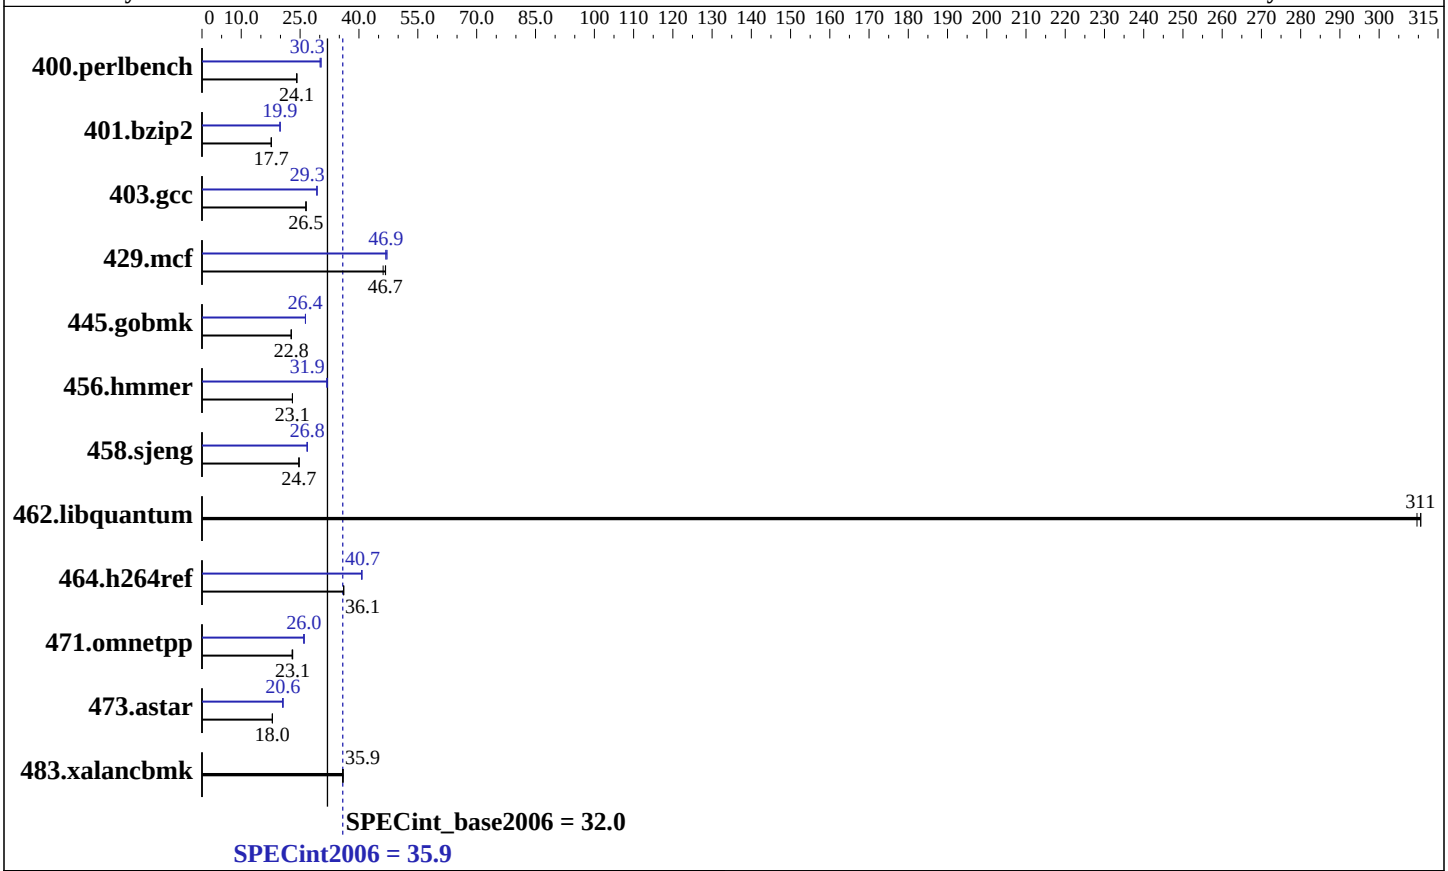

Hardware

CPU Name:	Intel Xeon X5570
CPU Characteristics:	Quad Core, 2.93 GHz Intel Turbo Boost Technology up to 3.33 GHz
CPU MHz:	2934
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6*4GB DDR3-1333 CL9 RDIMMs)
Disk Subsystem:	3 TB RAID 0 6 x 500 GB SATA (Seagate Barracuda 7200 rpm)
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.30-smp
Compiler:	Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
Auto Parallel:	Yes
File System:	xfs
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix XE 270 (Intel Xeon X5570, 2.93 GHz)

SPECint2006 = 35.9

SPECint_base2006 = 32.0

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Apr-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	404	24.2	**405**	**24.1**	405	24.1	325	30.1	322	30.3	**322**	**30.3**
401.bzip2	547	17.6	**546**	**17.7**	546	17.7	485	19.9	**485**	**19.9**	485	19.9
403.gcc	304	26.5	**304**	**26.5**	303	26.6	274	29.3	**275**	**29.3**	275	29.3
429.mcf	198	46.2	195	46.8	**195**	**46.7**	**195**	**46.9**	195	46.9	193	47.2
445.gobmk	**461**	**22.8**	461	22.8	461	22.7	398	26.4	**398**	**26.4**	398	26.4
456.hmmer	405	23.1	**405**	**23.1**	405	23.1	**293**	**31.9**	293	31.9	293	31.8
458.sjeng	**489**	**24.7**	489	24.8	490	24.7	**451**	**26.8**	451	26.8	451	26.8
462.libquantum	66.7	311	66.9	310	**66.7**	**311**	66.7	311	66.9	310	**66.7**	**311**
464.h264ref	613	36.1	612	36.1	**613**	**36.1**	**544**	**40.7**	544	40.7	543	40.8
471.omnetpp	271	23.1	**271**	**23.1**	272	23.0	240	26.0	241	25.9	**240**	**26.0**
473.astar	392	17.9	391	18.0	**391**	**18.0**	**341**	**20.6**	342	20.5	340	20.7
483.xalancbmk	192	35.8	**192**	**35.9**	192	36.0	192	35.8	**192**	**35.9**	192	36.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
SGI ProPack 6 for Linux Service Pack 2 installed
Adjacent cacheline prefetch enabled
OMP_NUM_THREADS set to number of physical cores
KMP_AFFINITY set to "granularity=fine,scatter"
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -par-runtime-control -opt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

456.hmmer: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

458.sjeng: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

C++ benchmarks (except as noted below):
`icpc`

473.astar: `/opt/intel/Compiler/11.0/080/bin/intel64/icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:54:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 May 2009.