



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp[®]_rate2006 = 276

Thunder n4250QE (S4985-SI), AMD Opteron 8435

SPECfp_rate_base2006 = 253

CPU2006 license: 49


Test date: May-2009

Test sponsor: Advanced Micro Devices

Hardware Availability: Jun-2009

Tested by: Advanced Micro Devices

Software Availability: Apr-2009

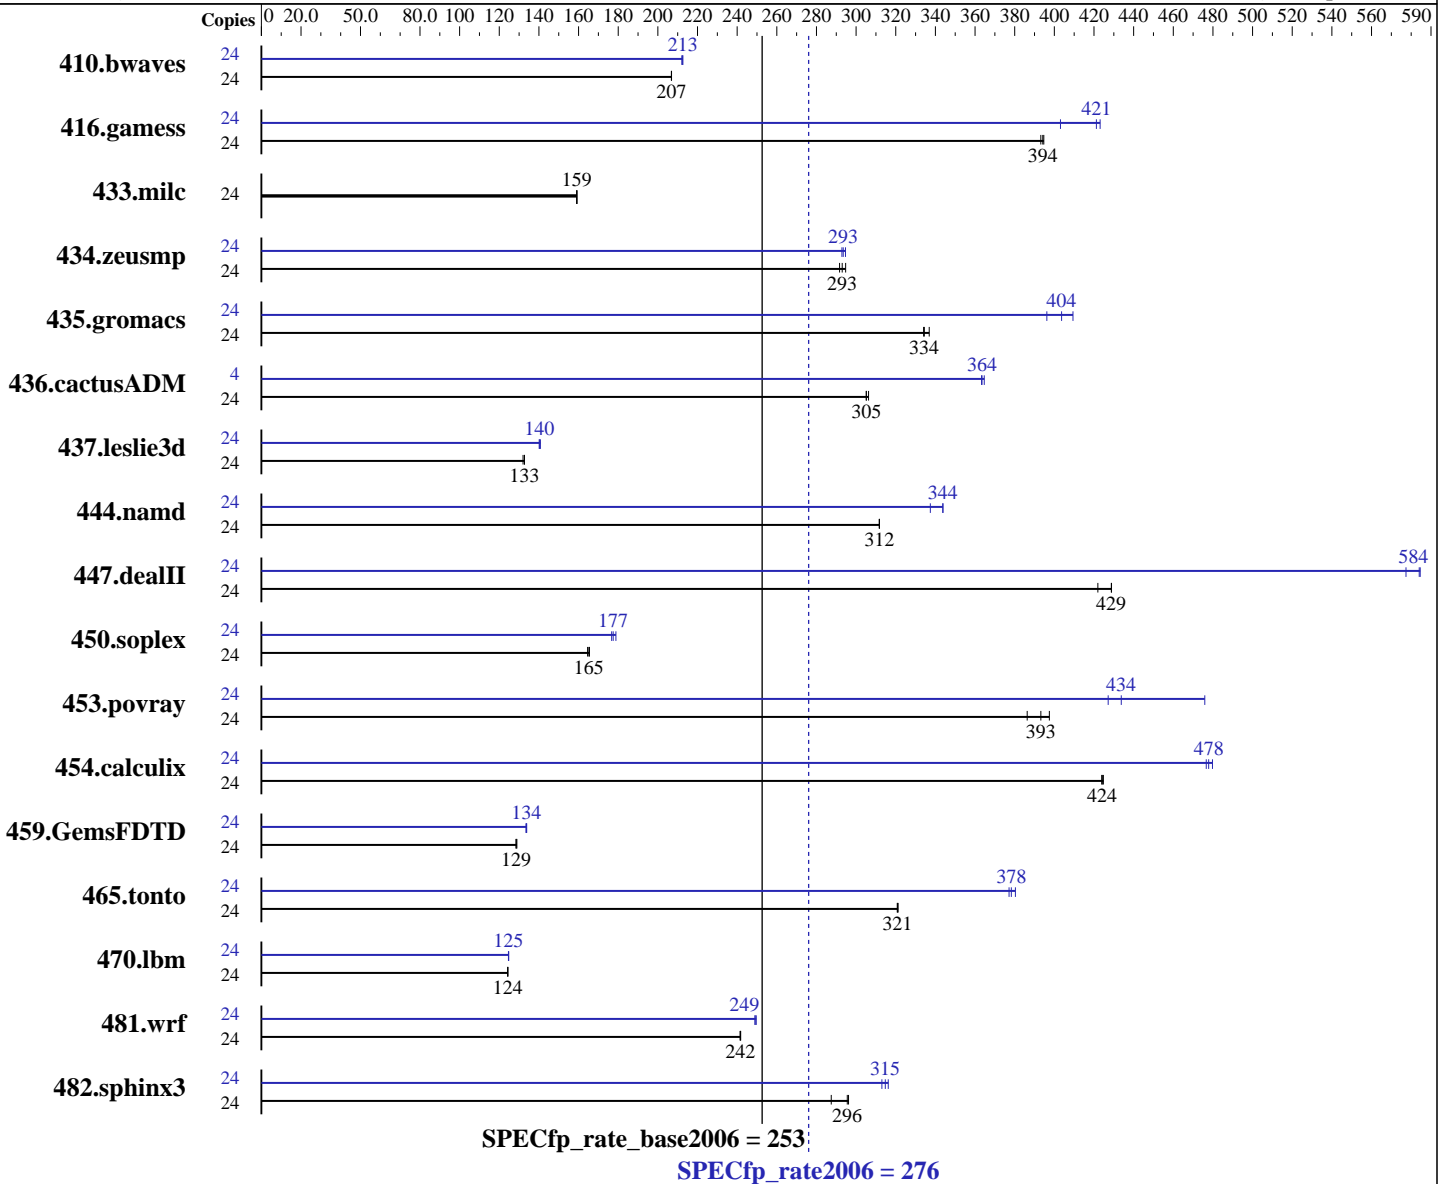

Hardware

CPU Name: AMD Opteron 8435
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 276

Thunder n4250QE (S4985-SI), AMD Opteron 8435

SPECfp_rate_base2006 = 253

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16x4 GB, DDR2-800, CL5, Reg, Dual Rank)
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1576	207	<u>1577</u>	<u>207</u>	1577	207	24	<u>1535</u>	<u>213</u>	1534	213	1538	212
416.gamess	24	1191	395	<u>1192</u>	<u>394</u>	1195	393	24	1166	403	<u>1116</u>	<u>421</u>	1111	423
433.milc	24	1385	159	<u>1385</u>	<u>159</u>	1384	159	24	1385	159	<u>1385</u>	<u>159</u>	1384	159
434.zeusmp	24	749	292	<u>745</u>	<u>293</u>	741	295	24	741	295	746	293	<u>744</u>	<u>293</u>
435.gromacs	24	509	337	<u>512</u>	<u>334</u>	513	334	24	419	409	<u>425</u>	<u>404</u>	432	396
436.cactusADM	24	940	305	936	306	<u>940</u>	<u>305</u>	4	<u>131</u>	<u>364</u>	131	365	132	363
437.leslie3d	24	1709	132	<u>1700</u>	<u>133</u>	1700	133	24	1610	140	1603	141	<u>1607</u>	<u>140</u>
444.namd	24	617	312	<u>617</u>	<u>312</u>	618	312	24	570	337	560	344	<u>560</u>	<u>344</u>
447.dealII	24	640	429	651	422	<u>640</u>	<u>429</u>	24	476	577	<u>470</u>	<u>584</u>	470	585
450.soplex	24	1216	165	1209	165	<u>1212</u>	<u>165</u>	24	1133	177	<u>1128</u>	<u>177</u>	1119	179
453.povray	24	<u>325</u>	<u>393</u>	331	386	321	397	24	<u>294</u>	<u>434</u>	299	427	268	476
454.calculix	24	466	425	<u>467</u>	<u>424</u>	467	424	24	415	477	413	480	<u>414</u>	<u>478</u>
459.GemsFDTD	24	<u>1981</u>	<u>129</u>	1976	129	1982	128	24	1903	134	1908	133	<u>1904</u>	<u>134</u>
465.tonto	24	736	321	735	321	<u>736</u>	<u>321</u>	24	<u>624</u>	<u>378</u>	626	377	621	380
470.lbm	24	2652	124	2654	124	<u>2653</u>	<u>124</u>	24	<u>2646</u>	<u>125</u>	2643	125	2646	125
481.wrf	24	<u>1109</u>	<u>242</u>	1110	241	1109	242	24	<u>1076</u>	<u>249</u>	1077	249	1074	250
482.sphinx3	24	1627	287	<u>1583</u>	<u>296</u>	1579	296	24	<u>1486</u>	<u>315</u>	1494	313	1479	316

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 276

Thunder n4250QE (S4985-SI), AMD Opteron 8435

SPECfp_rate_base2006 = 253

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

Component Notes

The tested system can be assembled using an SSI-MEB case and a Zippy PSL-6850P 850W power supply.

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/root/work/cpu2006v1.1/amd0905is-libs/64:/root/work/cpu2006v1.1/amd0905is-libs/32"

NCPUS = "6"

PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 276

Thunder n4250QE (S4985-SI), AMD Opteron 8435

SPECfp_rate_base2006 = 253

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Mvect=short -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

444.namd: pgcpp

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 276

Thunder n4250QE (S4985-SI), AMD Opteron 8435

SPECfp_rate_base2006 = 253

CPU2006 license: 49

Test date: May-2009

Test sponsor: Advanced Micro Devices

Hardware Availability: Jun-2009

Tested by: Advanced Micro Devices

Software Availability: Apr-2009

Peak Compiler Invocation (Continued)

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 276

Thunder n4250QE (S4985-SI), AMD Opteron 8435

SPECfp_rate_base2006 = 253

CPU2006 license: 49

Test date: May-2009

Test sponsor: Advanced Micro Devices

Hardware Availability: Jun-2009

Tested by: Advanced Micro Devices

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
 -Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
 -tp shanghai-64 -Bstatic_pgi

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on
 -LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
 -GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
 -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
 -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
 -CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
 -HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
 -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
 -OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
 -Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
 -Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
 -Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
 -Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
 -LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
 -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 276

Thunder n4250QE (S4985-SI), AMD Opteron 8435

SPECfp_rate_base2006 = 253

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre
-Mfprelaxed -tp shanghai-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge
-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64
-Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html>

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml>

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 276

Thunder n4250QE (S4985-SI), AMD Opteron 8435

SPECfp_rate_base2006 = 253

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:40:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 June 2009.