SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M2 (Intel Xeon L5506)

SPECint®_rate2006 = 141

SPECint_rate_base2006 = 132

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

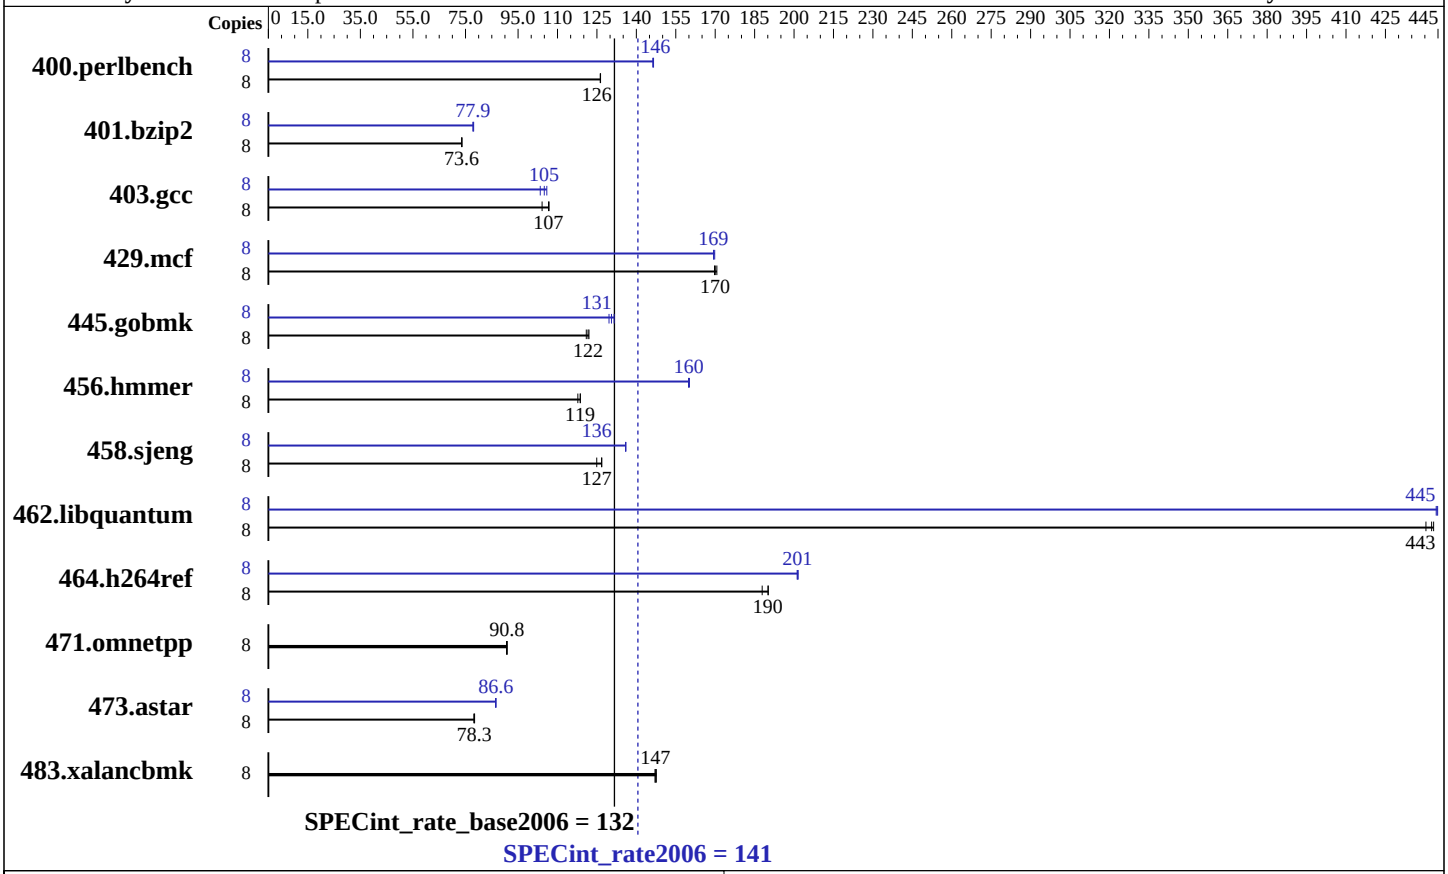

Hardware

CPU Name:	Intel Xeon L5506
CPU Characteristics:	
CPU MHz:	2133
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (12 x 2 GB PC3-10600R, 2 Rank, running at 800 MHz)
Disk Subsystem:	1 x 73 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3 (x86_64), Kernel 2.6.18-128.e15
Compiler:	Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M2 (Intel Xeon L5506)

SPECint_rate2006 = 141

SPECint_rate_base2006 = 132

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	618	126	619	126	**619**	**126**	8	533	147	534	146	**534**	**146**
401.bzip2	8	**1049**	**73.6**	1049	73.6	1048	73.6	8	992	77.9	**991**	**77.9**	988	78.1
403.gcc	8	618	104	603	107	**604**	**107**	8	**613**	**105**	623	103	608	106
429.mcf	8	430	170	**429**	**170**	428	171	8	**431**	**169**	430	170	431	169
445.gobmk	8	688	122	694	121	**690**	**122**	8	638	132	**643**	**131**	648	130
456.hmmer	8	634	118	629	119	**629**	**119**	8	466	160	**467**	**160**	467	160
458.sjeng	8	775	125	**764**	**127**	763	127	8	712	136	**712**	**136**	712	136
462.libquantum	8	376	440	**375**	**443**	374	443	8	373	444	373	445	**373**	**445**
464.h264ref	8	942	188	**931**	**190**	931	190	8	**879**	**201**	880	201	878	202
471.omnetpp	8	552	90.6	**551**	**90.8**	550	90.8	8	552	90.6	**551**	**90.8**	550	90.8
473.astar	8	716	78.5	718	78.2	**717**	**78.3**	8	650	86.4	**649**	**86.6**	649	86.6
483.xalancbmk	8	**375**	**147**	374	148	375	147	8	**375**	**147**	374	148	375	147

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

General Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Processor CPU C-States Enabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3 -opt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

456.hmmer: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

458.sjeng: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

C++ benchmarks (except as noted below):
`icpc`

473.astar: `/opt/intel/Compiler/11.0/080/bin/intel64/icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:44:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 June 2009.