SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco B200-M1 (Intel Xeon X5550, 2.66 GHz)

SPECfp®_rate2006 = 192

SPECfp_rate_base2006 = 186

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: May-2009
Hardware Availability: May-2009
Software Availability: May-2009

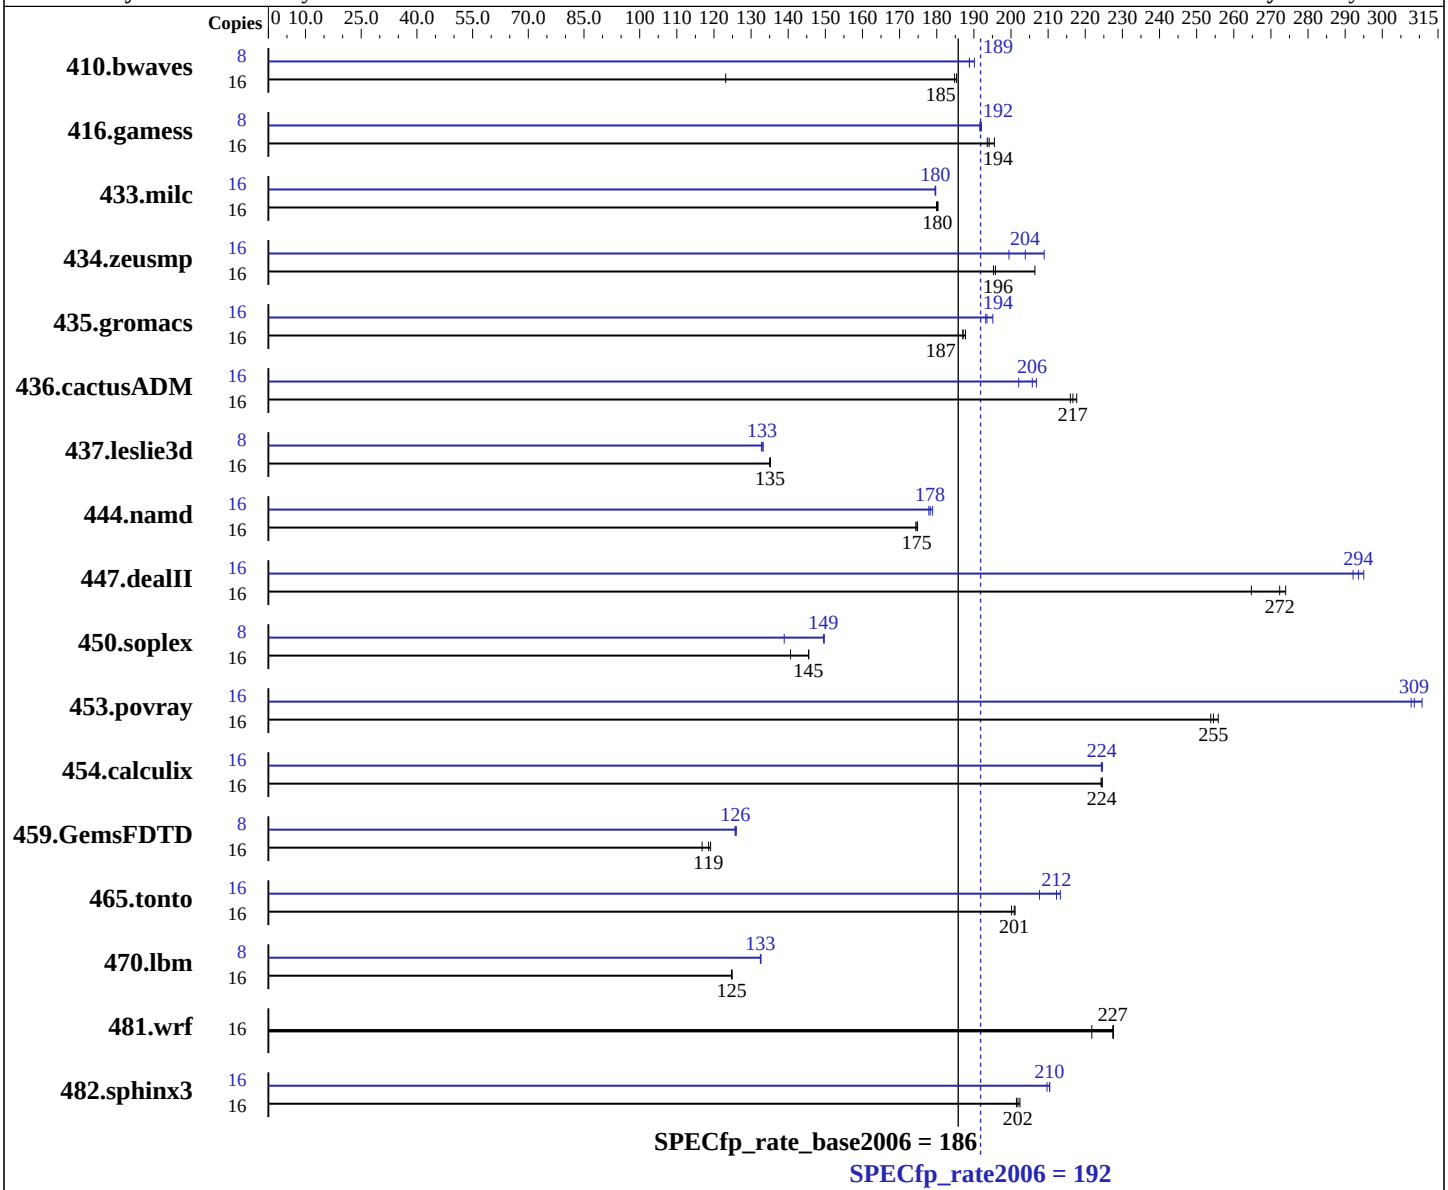

Hardware

CPU Name:	Intel Xeon X5550
CPU Characteristics:	Intel Turbo Boost Technology up to 3.06 GHz
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco B200-M1 (Intel Xeon X5550, 2.66 GHz)

SPECfp_rate2006 = 192

SPECfp_rate_base2006 = 186

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: May-2009
Hardware Availability: May-2009
Software Availability: May-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4GB DDR3 1333 MHz)
Disk Subsystem: 73 GB SAS ST973451SS, 15000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1765	123	1173	185	**1177**	**185**	8	576	189	572	190	**576**	**189**
416.gamess	16	1602	196	**1614**	**194**	1618	194	8	**817**	**192**	817	192	816	192
433.milc	16	816	180	**815**	**180**	814	180	16	**818**	**180**	818	180	817	180
434.zeusmp	16	705	206	746	195	**744**	**196**	16	730	199	697	209	**714**	**204**
435.gromacs	16	608	188	611	187	**611**	**187**	16	586	195	591	193	**590**	**194**
436.cactusADM	16	878	218	885	216	**882**	**217**	16	946	202	924	207	**929**	**206**
437.leslie3d	16	1114	135	1113	135	**1113**	**135**	8	**565**	**133**	566	133	564	133
444.namd	16	736	174	734	175	**735**	**175**	16	**720**	**178**	717	179	721	178
447.dealII	16	691	265	**672**	**272**	668	274	16	620	295	**623**	**294**	627	292
450.soplex	16	949	141	**917**	**145**	917	146	8	480	139	**446**	**149**	446	150
453.povray	16	333	256	335	254	**334**	**255**	16	**276**	**309**	274	311	277	308
454.calculix	16	589	224	588	225	**588**	**224**	16	588	225	588	224	**588**	**224**
459.GemsFDTD	16	1453	117	1425	119	**1432**	**119**	8	**675**	**126**	675	126	673	126
465.tonto	16	783	201	787	200	**784**	**201**	16	738	213	**742**	**212**	758	208
470.lbm	16	1761	125	**1761**	**125**	1762	125	8	830	133	**829**	**133**	828	133
481.wrf	16	785	228	**786**	**227**	806	222	16	785	228	**786**	**227**	806	222
482.sphinx3	16	1548	201	1541	202	**1545**	**202**	16	1487	210	1482	210	**1482**	**210**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl --localalloc --physcpubind=$BIND was used to bind copies to the cores
 using following bind list:
 bind =  0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15
```

Operating System Notes

```
 ulimit -s unlimited was used to set the stack size
```

General Notes

```
Submitted_by: "Ven Immani (immaniv)" <immaniv@cisco.com>
Submitted: Wed Jun 10 17:31:06 EDT 2009
Submission: cpu2006-20090601-07563.sub

Submitted_by: "Ven Immani (immaniv)" <immaniv@cisco.com>
Submitted: Wed Jun 10 17:36:06 EDT 2009
Submission: cpu2006-20090601-07563.sub
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
450.soplex: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`
482.sphinx3: `-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `icpc -m32`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `ifort -m32`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -opt-prefetch

Continued on next page

Peak Optimization Flags (Continued)

459.GemsFDTD: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -opt-prefetch`

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -opt-prefetch -auto-ilp32`

454.calculix: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:24:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.