SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 (Intel Xeon E5440)

SPECint®2006 = 26.1

SPECint_base2006 = 23.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2009
Hardware Availability: Nov-2008
Software Availability: Feb-2009

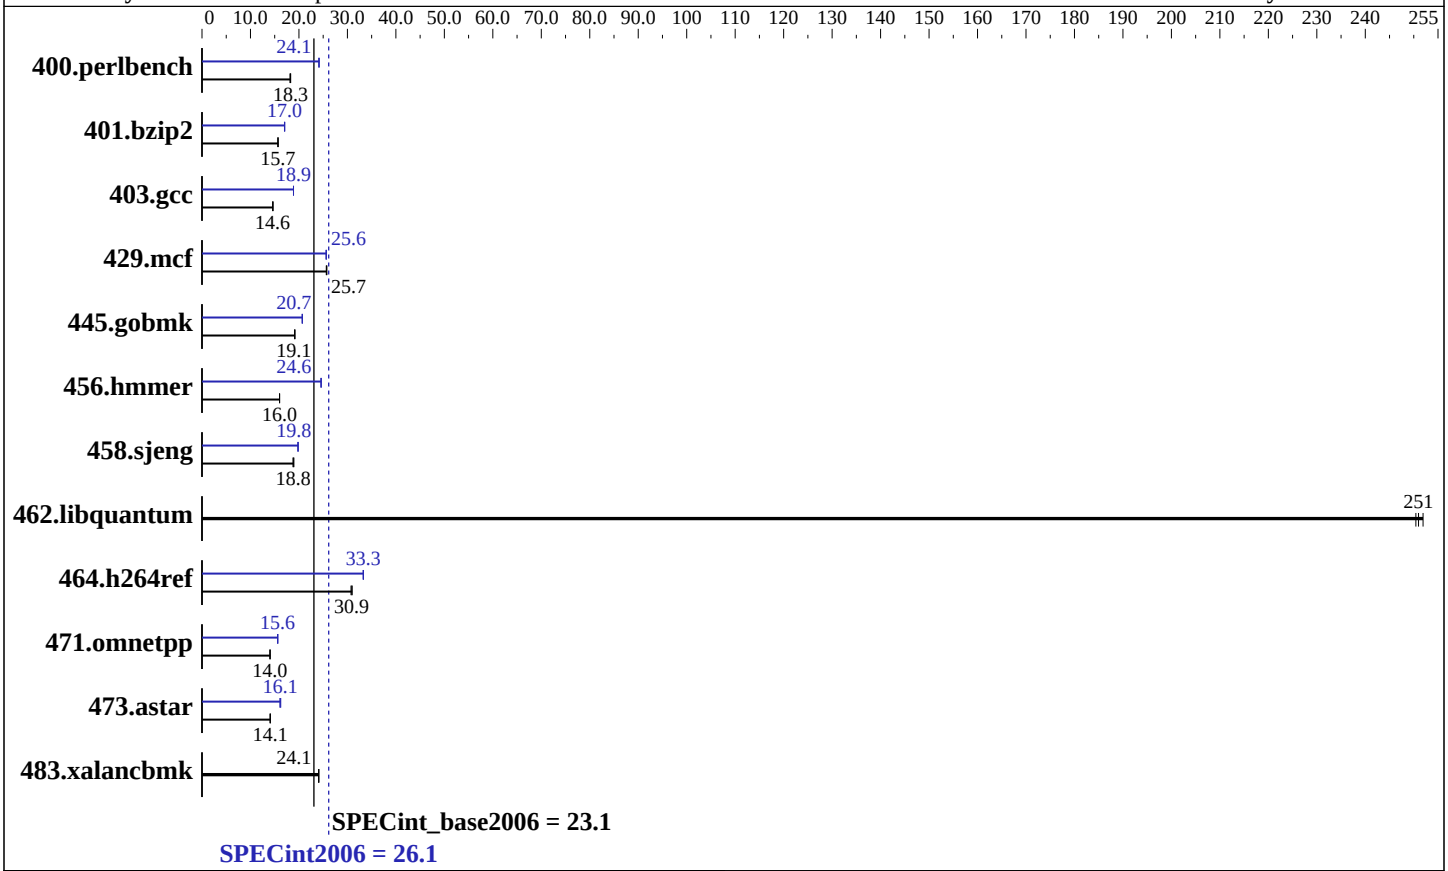

Hardware

CPU Name:	Intel Xeon E5440
CPU Characteristics:	1333MHz system bus
CPU MHz:	2833
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem:	1 x 250 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10(x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 (Intel Xeon E5440)

SPECint2006 = 26.1

SPECint_base2006 = 23.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2009
Hardware Availability: Nov-2008
Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	534	18.3	538	18.1	**535**	**18.3**	405	24.1	404	24.2	**405**	**24.1**
401.bzip2	617	15.6	614	15.7	**615**	**15.7**	567	17.0	565	17.1	**566**	**17.0**
403.gcc	549	14.7	**551**	**14.6**	552	14.6	**426**	**18.9**	426	18.9	427	18.9
429.mcf	356	25.6	354	25.7	**354**	**25.7**	**356**	**25.6**	356	25.6	356	25.6
445.gobmk	548	19.2	548	19.1	**548**	**19.1**	507	20.7	**507**	**20.7**	507	20.7
456.hmmer	583	16.0	**583**	**16.0**	583	16.0	**380**	**24.6**	379	24.6	380	24.6
458.sjeng	**642**	**18.8**	644	18.8	638	19.0	611	19.8	610	19.8	**611**	**19.8**
462.libquantum	82.2	252	**82.6**	**251**	82.7	250	82.2	252	**82.6**	**251**	82.7	250
464.h264ref	715	31.0	720	30.7	**716**	**30.9**	**664**	**33.3**	666	33.2	664	33.3
471.omnetpp	446	14.0	444	14.1	**445**	**14.0**	**400**	**15.6**	400	15.6	400	15.6
473.astar	**499**	**14.1**	498	14.1	499	14.1	**435**	**16.1**	432	16.2	436	16.1
483.xalancbmk	286	24.1	**287**	**24.1**	287	24.1	286	24.1	**287**	**24.1**	287	24.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Hardware Sector Prefetch Enable and Adjacent Sector Prefetch Enable
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -par-runtime-control -opt-prefetch`

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/Compiler/11.0/066/bin/intel64/icc`

456.hmmer: `/opt/intel/Compiler/11.0/066/bin/intel64/icc`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -ansi-alias -opt-prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-prefetch -ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: `-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3`

429.mcf: `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4`

462.libquantum: `basepeak = yes`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.17.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.17.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 (Intel Xeon E5440)

SPECint2006 = 26.1

SPECint_base2006 = 23.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2009
Hardware Availability: Nov-2008
Software Availability: Feb-2009

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:39:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 June 2009.