SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

Asus P6T Deluxe (Intel Core i7-950)

SPECint®_rate2006 = 120

SPECint_rate_base2006 = 112

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Jun-2009
Software Availability: Nov-2008

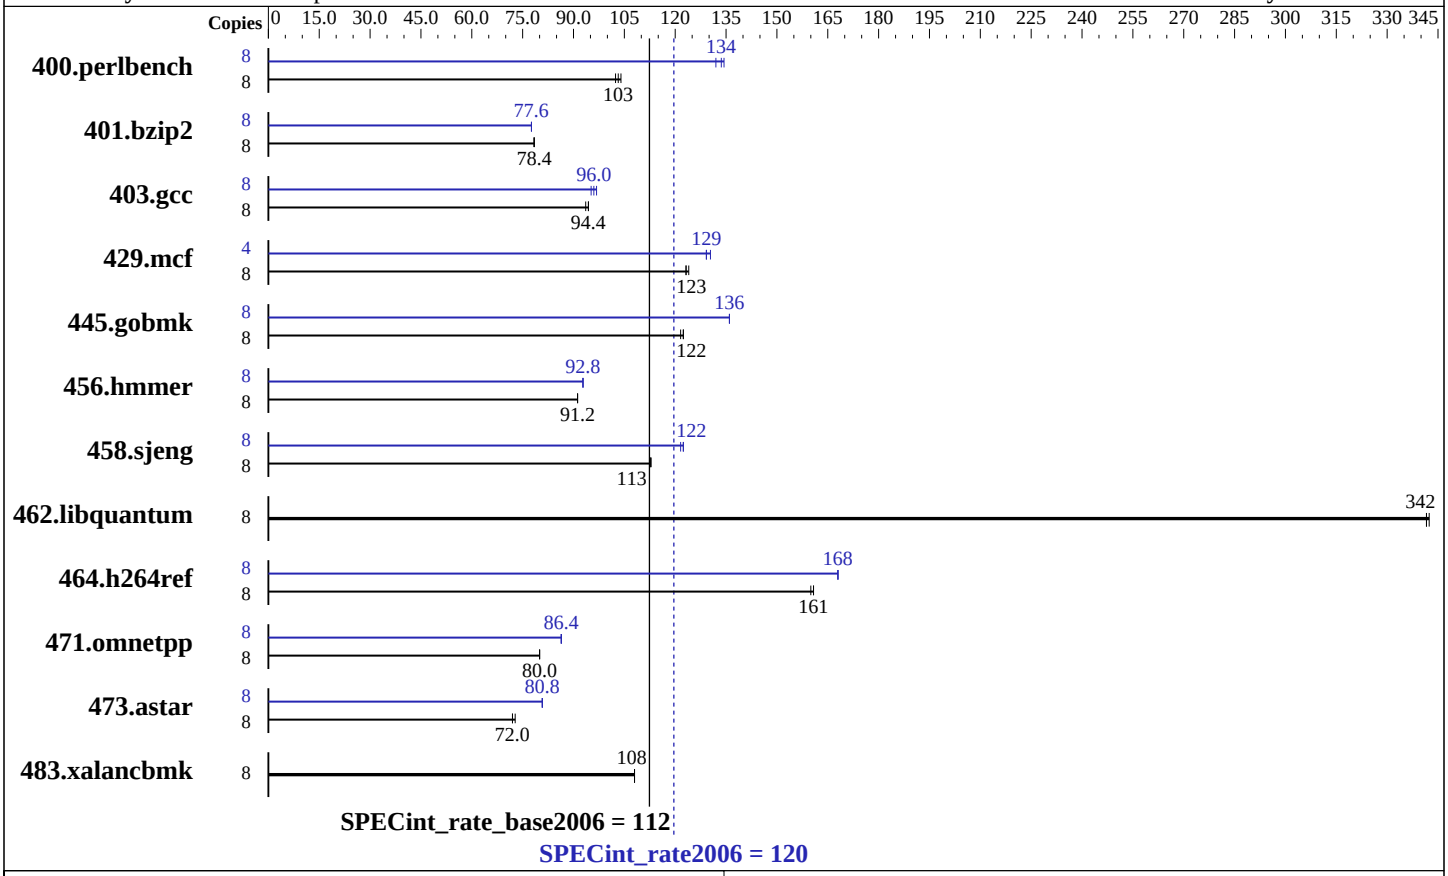

Hardware

CPU Name:	Intel Core i7-950
CPU Characteristics:	Intel Turbo Boost Technology up to 3.33 GHz
CPU MHz:	3066
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	12 GB (6 x 2GB Samsung M378B5673DZ1-CF8 DDR3-1066 CL7)
Disk Subsystem:	80 GB Intel X-25M SATA Solid-State Drive
Other Hardware:	None

Software

Operating System:	Windows Vista Ultimate w/ SP1 (64-bit)
Compiler:	Intel C++ Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cproc_p_11.0.054 Microsoft Visual Studio 2008 (for libraries)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	SmartHeap Library Version 8.1 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

Asus P6T Deluxe (Intel Core i7-950)

SPECint_rate2006 = 120

SPECint_rate_base2006 = 112

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Jun-2009
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**759**	**103**	752	104	762	102	8	582	134	**586**	**134**	591	132
401.bzip2	8	**988**	**78.4**	989	78.4	987	78.4	8	991	77.6	**993**	**77.6**	994	77.6
403.gcc	8	689	93.6	680	94.4	**685**	**94.4**	8	**673**	**96.0**	668	96.8	679	95.2
429.mcf	8	**591**	**123**	589	124	593	123	4	**282**	**129**	282	129	280	130
445.gobmk	8	686	122	689	122	**687**	**122**	8	**617**	**136**	617	136	617	136
456.hmmer	8	816	91.2	816	91.2	**816**	**91.2**	8	804	92.8	**804**	**92.8**	804	92.8
458.sjeng	8	857	113	**857**	**113**	859	113	8	794	122	793	122	**793**	**122**
462.libquantum	8	**485**	**342**	484	342	485	342	8	**485**	**342**	484	342	485	342
464.h264ref	8	1102	161	1105	160	**1102**	**161**	8	1054	168	1055	168	**1054**	**168**
471.omnetpp	8	626	80.0	626	80.0	**626**	**80.0**	8	**581**	**86.4**	581	86.4	581	86.4
473.astar	8	776	72.0	776	72.8	**776**	**72.0**	8	**692**	**80.8**	692	80.8	692	80.8
483.xalancbmk	8	510	108	**510**	**108**	510	108	8	510	108	**510**	**108**	510	108

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
System was configured with nVidia GTX 280 discrete graphics card
Binaries were built on Windows Vista Ultimate (32-bit)
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qc99
```

C++ benchmarks:
```
icl -Qvc9
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

C++ benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qc99
```

C++ benchmarks:
```
icl -Qvc9
```

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch`
`/F512000000 shlw32m.lib            -link /FORCE:MULTIPLE`

401.bzip2: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias`
`/F512000000`

403.gcc: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

458.sjeng: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

473.astar: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:14:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.