SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ45CB motherboard (Intel Core 2 Duo E8500)

SPECint®_rate2006 = 47.3

SPECint_rate_base2006 = 44.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

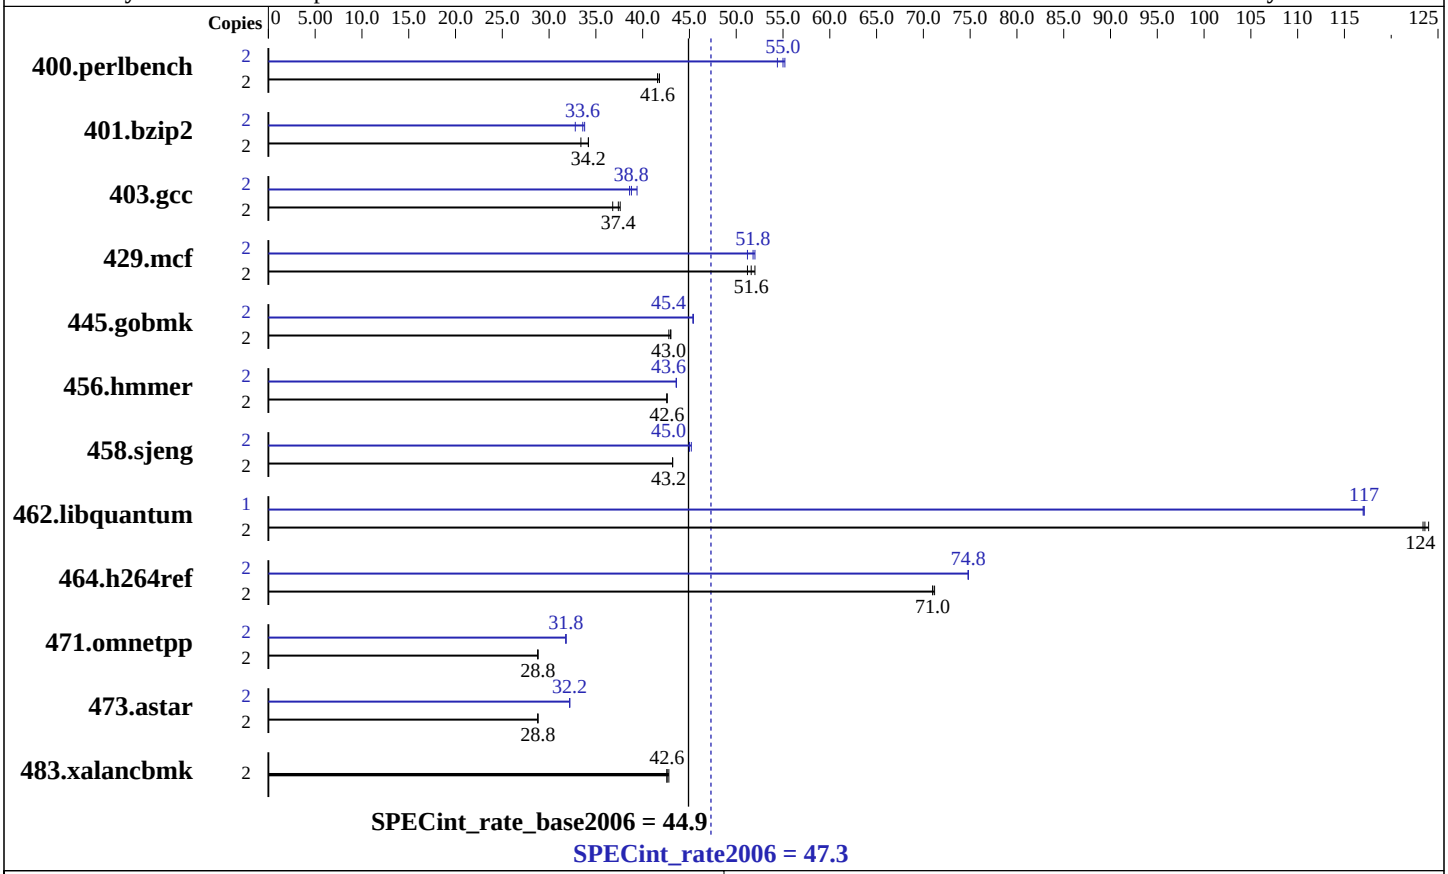

Hardware

CPU Name:	Intel Core 2 Duo E8500
CPU Characteristics:	
CPU MHz:	3166
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	4 GB (4x1GB DDR2-800 CL5)
Disk Subsystem:	Seagate 320 GB SATA, 7200RPM
Other Hardware:	None

Software

Operating System:	Windows Vista Ultimate w/ SP1 (64-bit)
Compiler:	Intel C++ Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cproc_p_11.0.054 Microsoft Visual Studio 2008 (for libraries)
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	SmartHeap Library Version 8.1 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ45CB motherboard (Intel Core 2 Duo E8500)

SPECint_rate2006 = 47.3

SPECint_rate_base2006 = 44.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	468	41.8	**469**	**41.6**	469	41.6	2	359	54.4	**355**	**55.0**	355	55.2
401.bzip2	2	579	33.4	**565**	**34.2**	565	34.2	2	**574**	**33.6**	587	32.8	570	33.8
403.gcc	2	**431**	**37.4**	428	37.6	437	36.8	2	418	38.6	**415**	**38.8**	409	39.4
429.mcf	2	**353**	**51.6**	350	52.0	356	51.2	2	**353**	**51.8**	351	52.0	356	51.2
445.gobmk	2	489	42.8	488	43.0	**489**	**43.0**	2	462	45.4	**462**	**45.4**	463	45.4
456.hmmer	2	438	42.6	**438**	**42.6**	438	42.6	2	**428**	**43.6**	428	43.6	429	43.6
458.sjeng	2	**560**	**43.2**	560	43.2	560	43.2	2	**537**	**45.0**	537	45.2	537	45.0
462.libquantum	2	**335**	**124**	334	124	336	123	1	177	117	**177**	**117**	177	117
464.h264ref	2	623	71.0	622	71.2	**623**	**71.0**	2	592	74.8	591	74.8	**592**	**74.8**
471.omnetpp	2	434	28.8	433	28.8	**434**	**28.8**	2	**393**	**31.8**	393	31.8	393	31.8
473.astar	2	489	28.8	487	28.8	**488**	**28.8**	2	437	32.2	**436**	**32.2**	436	32.2
483.xalancbmk	2	323	42.6	**323**	**42.6**	323	42.8	2	323	42.6	**323**	**42.6**	323	42.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
Tested systems can be used with Shin-G ATX case,
Antec Truepower Trio power supply TP3-650
Binaries were built on Windows Vista Ultimate (32-bit)
Binaries were built on Windows Vista Ultimate (32-bit)
OMP_NUM_THREADS set to number of logical processors as seen by the OS
KMP_AFFINITY set to physical,0
submit disabled for 462.libquantum peak
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qc99
```

C++ benchmarks:

```
icl -Qvc9
```

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

C++ benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qc99

C++ benchmarks:
icl -Qvc9

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F512000000

403.gcc: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

445.gobmk: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

458.sjeng: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel -Qpar-runtime-control -Qvec-guard-write /F512000000

464.h264ref: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

473.astar: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:37:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.