SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ45CB motherboard (Intel Core 2 Duo E7400)

SPECfp®_rate2006 = 28.8

SPECfp_rate_base2006 = 27.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

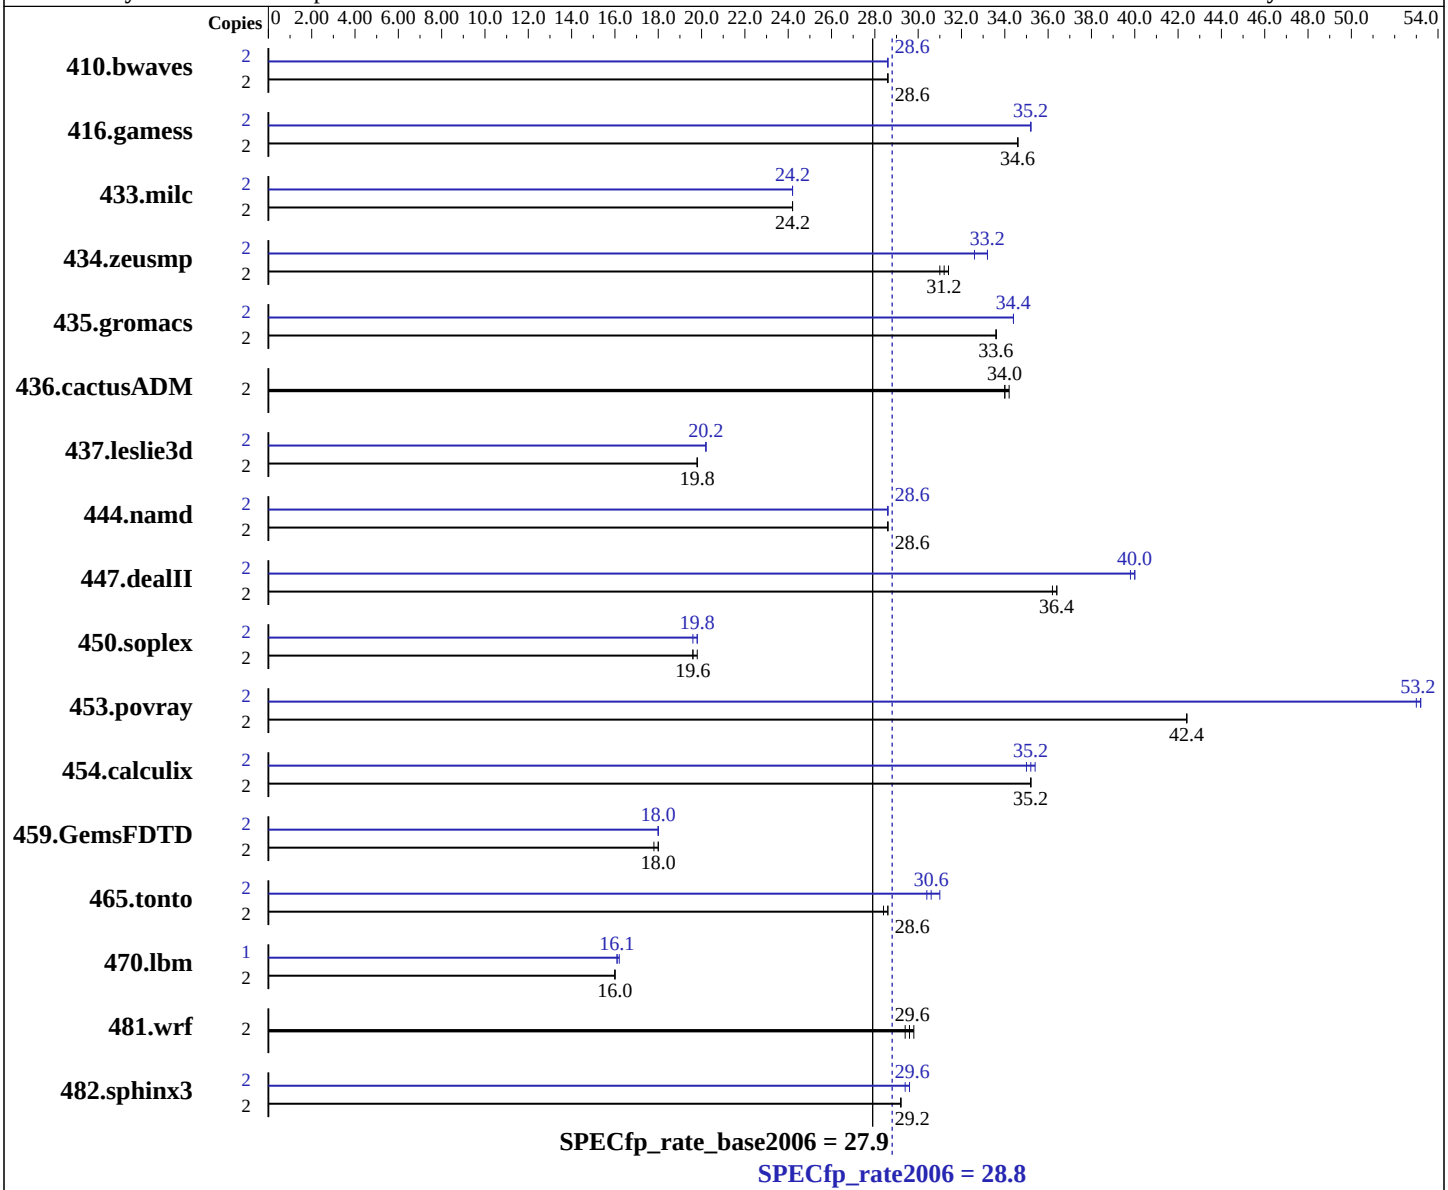

Hardware

CPU Name:	Intel Core 2 Duo E7400
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	3 MB I+D on chip per chip

Continued on next page

Software

Operating System:	Windows Vista Ultimate w/ SP1 (64-bit)
Compiler:	Intel C++ Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cproc_p_11.0.054 Intel Visual Fortran Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cprof_p_11.0.054 Microsoft Visual Studio 2008 (for libraries)
Auto Parallel:	No
File System:	NTFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ45CB motherboard (Intel Core 2 Duo E7400)

SPECfp_rate2006 = 28.8

SPECfp_rate_base2006 = 27.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 4 GB (4x1GB DDR2-800 CL5)
Disk Subsystem: Seagate 320 GB SATA, 7200RPM
Other Hardware: None

System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: SmartHeap Library Version 8.1 from http://www.microquill.com/

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	**950**	**28.6**	949	28.6	952	28.6	2	948	28.6	949	28.6	**949**	**28.6**
416.gamess	2	1132	34.6	**1130**	**34.6**	1129	34.6	2	1113	35.2	**1113**	**35.2**	1113	35.2
433.milc	2	760	24.2	759	24.2	**760**	**24.2**	2	759	24.2	758	24.2	**758**	**24.2**
434.zeusmp	2	588	31.0	**585**	**31.2**	580	31.4	2	547	33.2	558	32.6	**547**	**33.2**
435.gromacs	2	425	33.6	**425**	**33.6**	424	33.6	2	415	34.4	415	34.4	**415**	**34.4**
436.cactusADM	2	**702**	**34.0**	699	34.2	703	34.0	2	**702**	**34.0**	699	34.2	703	34.0
437.leslie3d	2	950	19.8	**949**	**19.8**	947	19.8	2	**929**	**20.2**	932	20.2	928	20.2
444.namd	2	560	28.6	**560**	**28.6**	560	28.6	2	561	28.6	560	28.6	**560**	**28.6**
447.dealII	2	630	36.4	**630**	**36.4**	631	36.2	2	571	40.0	574	39.8	**573**	**40.0**
450.soplex	2	843	19.8	**847**	**19.6**	853	19.6	2	**842**	**19.8**	850	19.6	840	19.8
453.povray	2	250	42.4	**251**	**42.4**	251	42.4	2	201	53.0	200	53.2	**200**	**53.2**
454.calculix	2	468	35.2	**468**	**35.2**	469	35.2	2	**468**	**35.2**	467	35.4	471	35.0
459.GemsFDTD	2	1176	18.0	**1182**	**18.0**	1188	17.8	2	**1184**	**18.0**	1185	18.0	1184	18.0
465.tonto	2	689	28.6	691	28.4	**690**	**28.6**	2	**645**	**30.6**	636	31.0	648	30.4
470.lbm	2	1723	16.0	1721	16.0	**1721**	**16.0**	1	**851**	**16.1**	852	16.1	850	16.2
481.wrf	2	**755**	**29.6**	752	29.8	760	29.4	2	**755**	**29.6**	752	29.8	760	29.4
482.sphinx3	2	1337	29.2	**1336**	**29.2**	1335	29.2	2	1322	29.4	**1321**	**29.6**	1320	29.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
Tested systems can be used with Shin-G ATX case,
Antec Truepower Trio power supply TP3-650
Binaries were built on Windows Vista Ultimate (32-bit)
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qc99
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qc99 ifort

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

C++ benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F1000000000 shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

Benchmarks using both Fortran and C:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qc99

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icl -Qvc9 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

433.milc: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Oa /F1000000000

470.lbm: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

482.sphinx3: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib -link /FORCE:MULTIPLE

447.dealII: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qscalar-rep- /F1000000000 shlw32m.lib -link /FORCE:MULTIPLE

450.soplex: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib -link /FORCE:MULTIPLE

453.povray: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000 shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: `-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000`

416.gamess: `-QxSSE4.1`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000`

434.zeusmp: `-QxSSE4.1`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- /F1000000000`

437.leslie3d: `-QxSSE4.1`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000`

459.GemsFDTD: `-QxSSE4.1`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch /F1000000000`

465.tonto: `-QxSSE4.1`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000`

Benchmarks using both Fortran and C:

435.gromacs: `-QxSSE4.1`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000`

436.cactusADM: `basepeak = yes`

454.calculix: `-QxSSE4.1 -Qipo -O3 -Qprec-div- /F1000000000`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:14:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.