SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD220(Intel Xeon X5570, 2.93 GHz)

SPECint®2006 =	35.0
SPECint_base2006 =	31.1

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: May-2009
Hardware Availability: May-2009
Software Availability: Mar-2009

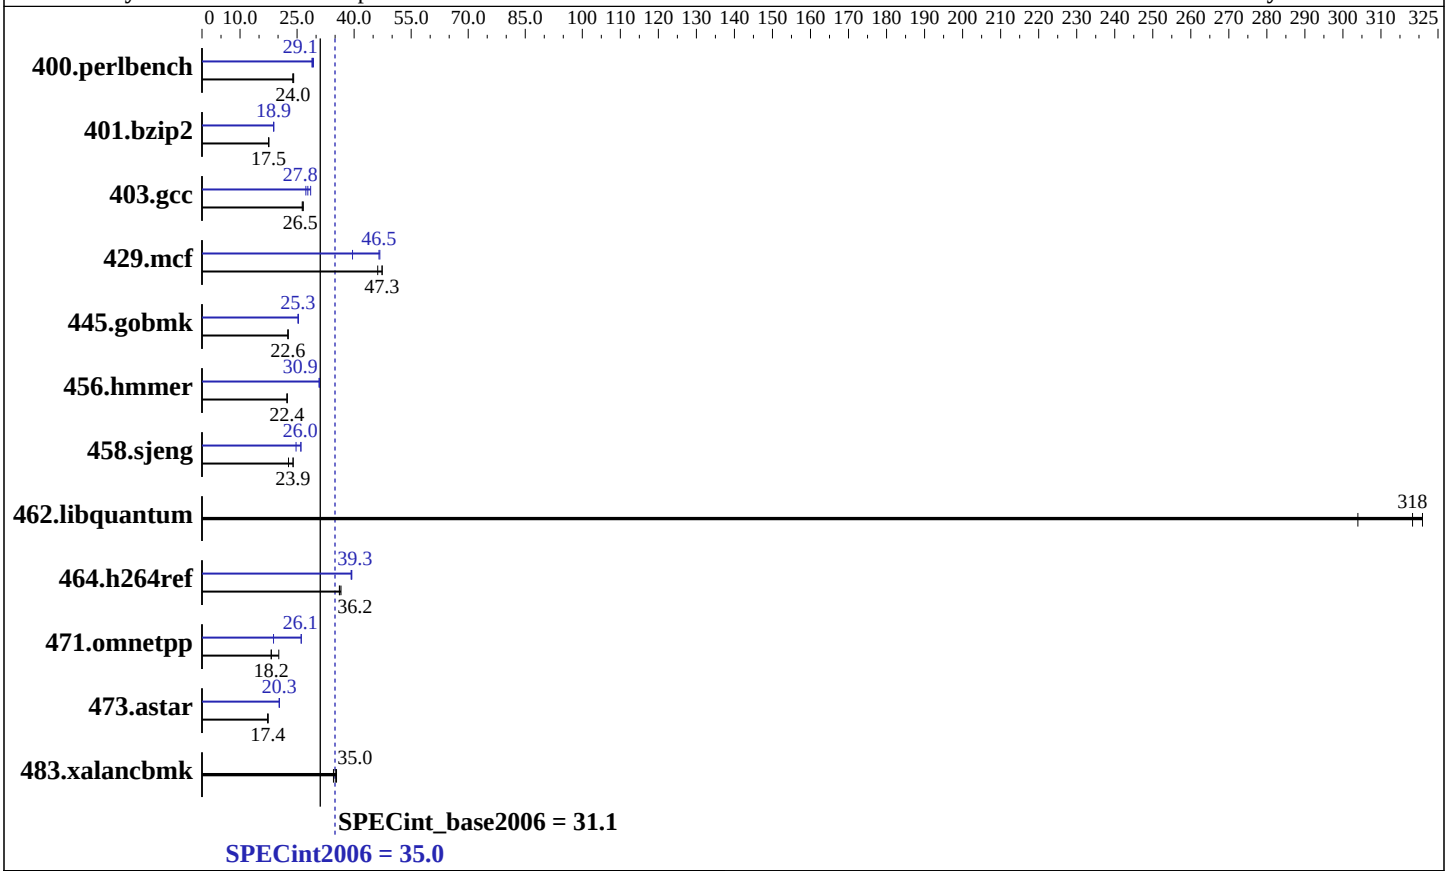

Hardware

CPU Name:	Intel Xeon X5570
CPU Characteristics:	Intel Turbo Boost Technology up to 3.33 GHz
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6 x 4 GB DDR3-1333 DR RDIMM)
Disk Subsystem:	1 x 73 GB, SAS 15K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler Professional 11.0 for Linux Build 20090209 Package ID: l_cproc_p_11.0.081
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD220(Intel Xeon X5570, 2.93 GHz)

SPECint2006 = 35.0

SPECint_base2006 = 31.1

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: May-2009
Hardware Availability: May-2009
Software Availability: Mar-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	409	23.9	**408**	**24.0**	405	24.1	333	29.3	338	28.9	**336**	**29.1**
401.bzip2	**550**	**17.5**	550	17.6	551	17.5	511	18.9	**512**	**18.9**	513	18.8
403.gcc	302	26.6	305	26.4	**304**	**26.5**	**289**	**27.8**	295	27.3	282	28.6
429.mcf	192	47.4	**193**	**47.3**	197	46.2	230	39.6	195	46.8	**196**	**46.5**
445.gobmk	463	22.6	**464**	**22.6**	464	22.6	**415**	**25.3**	414	25.4	415	25.3
456.hmmer	417	22.4	417	22.4	**417**	**22.4**	303	30.8	**302**	**30.9**	302	30.9
458.sjeng	505	24.0	**505**	**23.9**	532	22.8	489	24.7	**466**	**26.0**	465	26.0
462.libquantum	**65.1**	**318**	68.2	304	64.6	321	**65.1**	**318**	68.2	304	64.6	321
464.h264ref	613	36.1	**611**	**36.2**	605	36.5	564	39.2	**563**	**39.3**	562	39.4
471.omnetpp	344	18.2	309	20.2	**343**	**18.2**	332	18.8	**240**	**26.1**	239	26.1
473.astar	**405**	**17.4**	404	17.4	407	17.3	345	20.3	**345**	**20.3**	345	20.3
483.xalancbmk	200	34.6	195	35.4	**197**	**35.0**	200	34.6	195	35.4	**197**	**35.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -par-runtime-control -opt-prefetch`

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/cpu2006/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/Compiler/11.0/081/bin/intel64/icc`

456.hmmer: `/opt/intel/Compiler/11.0/081/bin/intel64/icc`

458.sjeng: `/opt/intel/Compiler/11.0/081/bin/intel64/icc`

C++ benchmarks (except as noted below):
`icpc`

473.astar: `/opt/intel/Compiler/11.0/081/bin/intel64/icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-prefetch`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/cpu2006/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32 -Wl,-z,muldefs -L/cpu2006/lib -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.15.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.15.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:25:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2009.