SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R410 (Intel Xeon X5560, 2.80 GHz)

SPECfp®2006 = 38.7

SPECfp_base2006 = 36.7

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

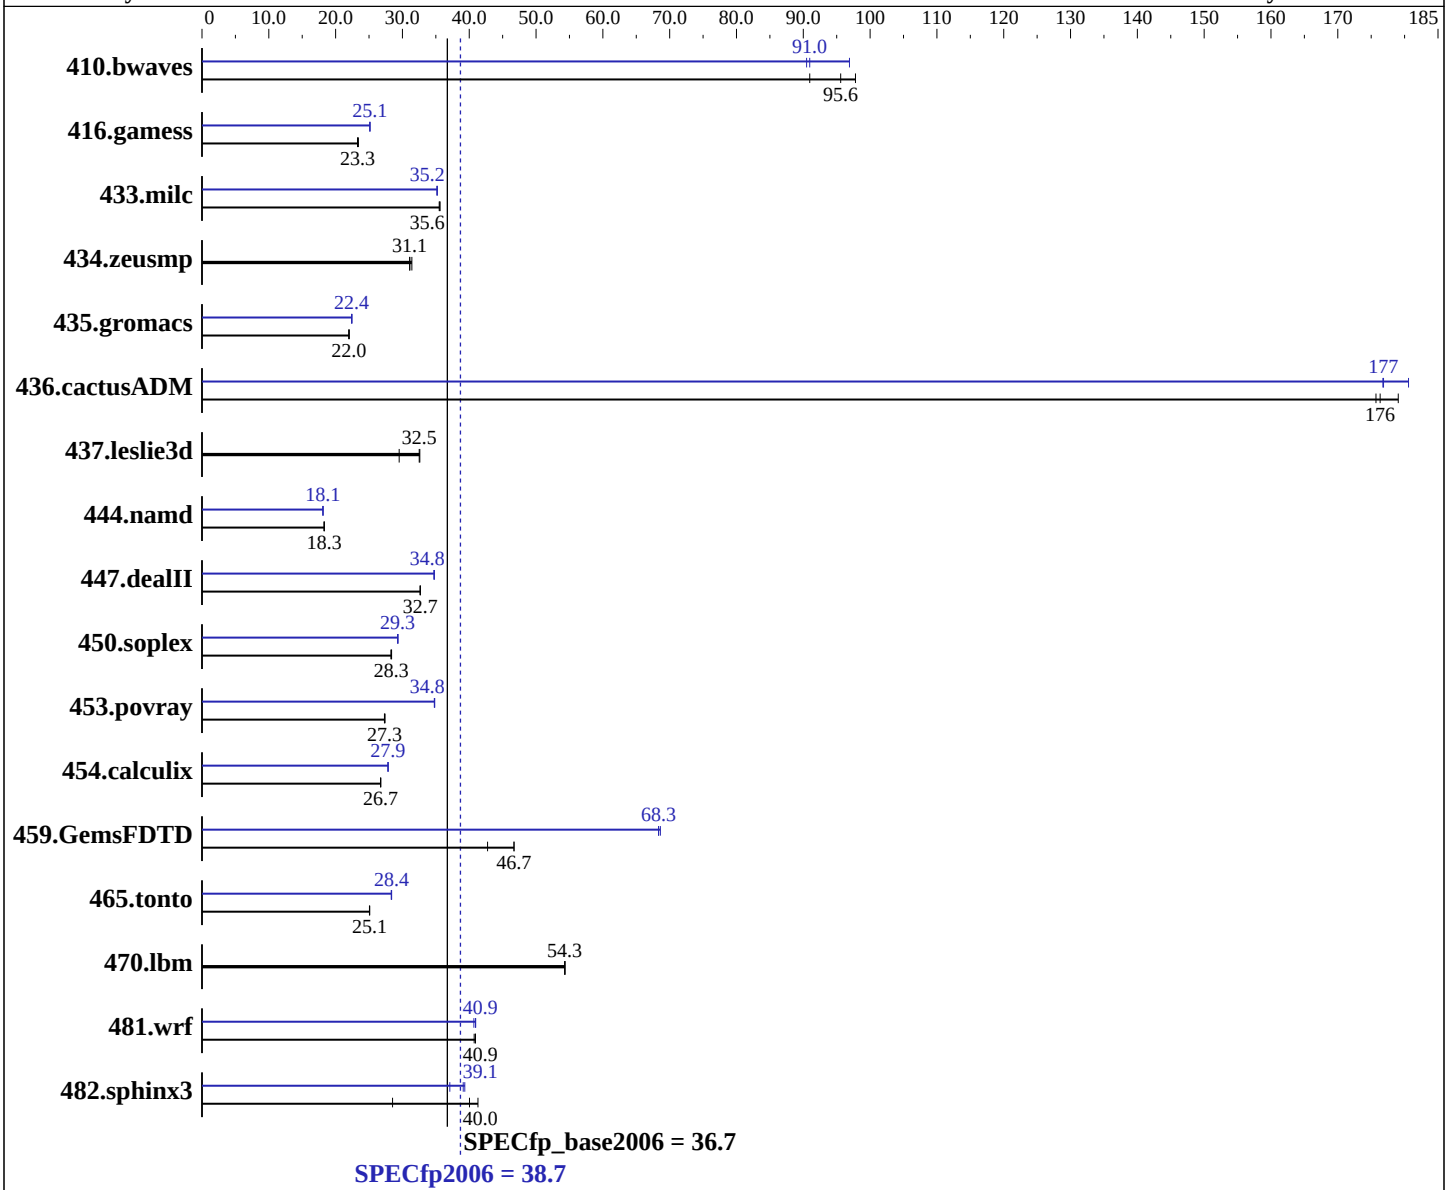

Hardware

CPU Name:	Intel Xeon X5560
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R410 (Intel Xeon X5560, 2.80 GHz)

SPECfp2006 = 38.7

SPECfp_base2006 = 36.7

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB DDR3-1333 DR RDIMM)
Disk Subsystem: 1 x 160 GB 7200 RPM SATA
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**142**	**95.6**	139	97.8	149	91.0	140	96.9	150	90.5	**149**	**91.0**
416.gamess	841	23.3	**840**	**23.3**	836	23.4	779	25.1	779	25.1	**779**	**25.1**
433.milc	259	35.5	258	35.6	**258**	**35.6**	261	35.2	261	35.2	**261**	**35.2**
434.zeusmp	290	31.4	**293**	**31.1**	293	31.1	290	31.4	**293**	**31.1**	293	31.1
435.gromacs	325	22.0	**324**	**22.0**	324	22.0	318	22.5	319	22.4	**319**	**22.4**
436.cactusADM	66.7	179	68.0	176	**67.8**	**176**	**67.6**	**177**	67.6	177	66.2	181
437.leslie3d	**289**	**32.5**	319	29.5	288	32.6	**289**	**32.5**	319	29.5	288	32.6
444.namd	**438**	**18.3**	438	18.3	439	18.3	443	18.1	**443**	**18.1**	443	18.1
447.dealII	**350**	**32.7**	350	32.7	350	32.7	**329**	**34.8**	329	34.8	329	34.7
450.soplex	**294**	**28.3**	294	28.4	295	28.3	284	29.3	285	29.3	**285**	**29.3**
453.povray	**195**	**27.3**	195	27.3	194	27.4	153	34.8	**153**	**34.8**	153	34.8
454.calculix	308	26.8	**309**	**26.7**	309	26.7	296	27.9	**296**	**27.9**	296	27.8
459.GemsFDTD	**227**	**46.7**	227	46.7	248	42.7	**155**	**68.3**	155	68.3	155	68.6
465.tonto	**392**	**25.1**	392	25.1	393	25.1	347	28.3	347	28.4	**347**	**28.4**
470.lbm	**253**	**54.3**	253	54.3	253	54.3	**253**	**54.3**	253	54.3	253	54.3
481.wrf	274	40.7	273	40.9	**273**	**40.9**	274	40.7	**273**	**40.9**	273	41.0
482.sphinx3	683	28.5	472	41.3	**487**	**40.0**	**498**	**39.1**	496	39.3	525	37.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Continued on next page

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

482.sphinx3: icc -m32

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):
icpc

450.soplex: icpc -m32

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel -auto-ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:19:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2009.