SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard H8QM3-2, AMD Opteron 8439 SE

SPECint®2006 = 22.4

SPECint_base2006 = 18.8

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jul-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

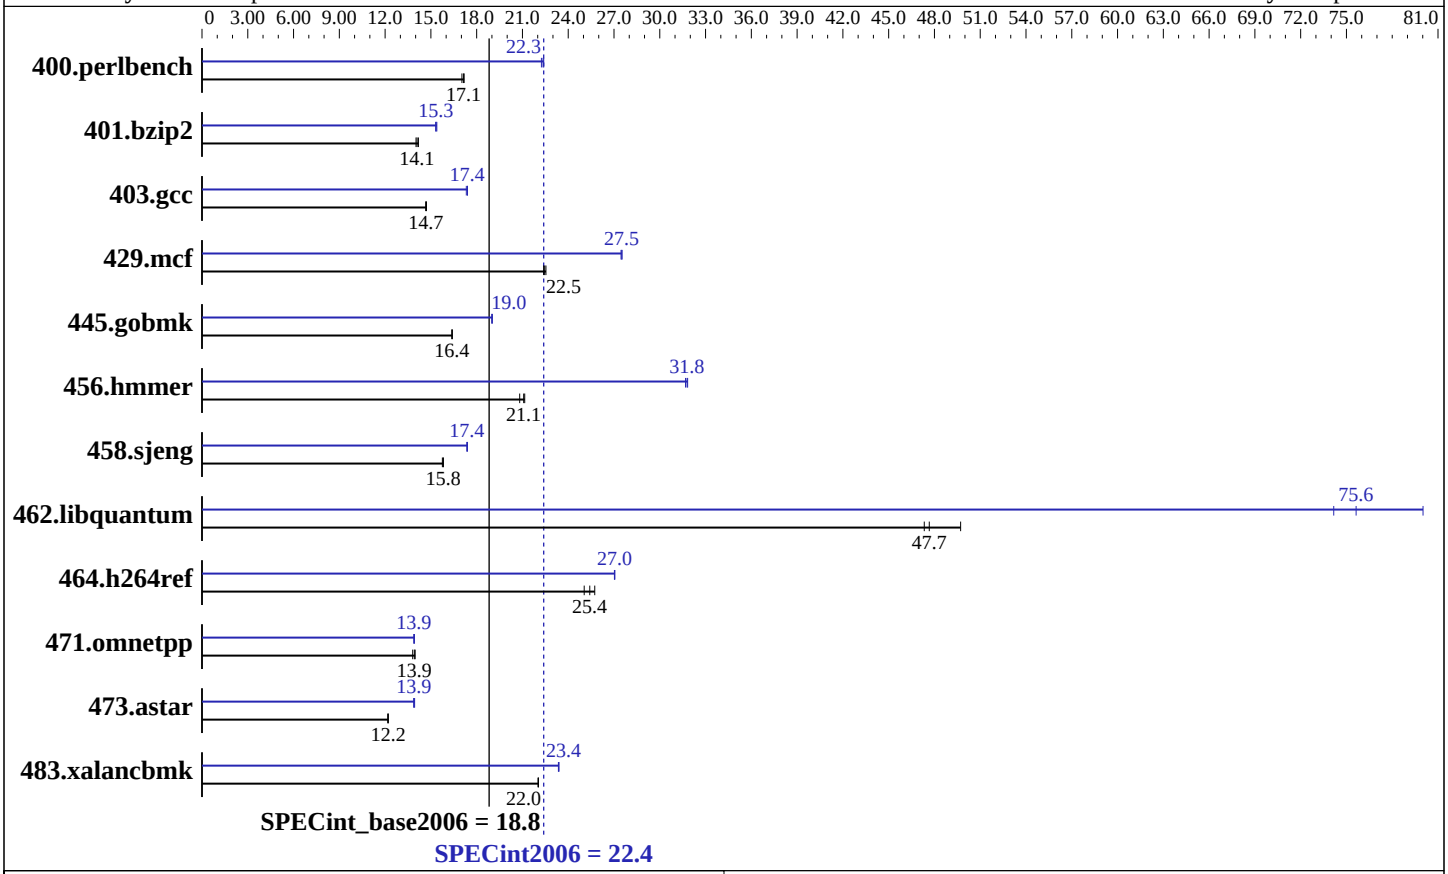

Hardware

CPU Name:	AMD Opteron 8439 SE
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	24 cores, 4 chips, 6 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (16x4 GB, DDR2-800, CL5, Reg, Dual Rank)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 2 (Local multiuser without remote network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard H8QM3-2, AMD Opteron 8439 SE

SPECint2006 = 22.4

SPECint_base2006 = 18.8

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jul-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**570**	**17.1**	574	17.0	569	17.2	439	22.2	**437**	**22.3**	436	22.4
401.bzip2	**685**	**14.1**	680	14.2	688	14.0	627	15.4	630	15.3	**629**	**15.3**
403.gcc	547	14.7	**549**	**14.7**	549	14.7	463	17.4	465	17.3	**463**	**17.4**
429.mcf	405	22.5	**406**	**22.5**	407	22.4	332	27.5	331	27.5	**331**	**27.5**
445.gobmk	640	16.4	640	16.4	**640**	**16.4**	551	19.0	**552**	**19.0**	552	19.0
456.hmmer	441	21.1	**443**	**21.1**	448	20.8	294	31.7	293	31.8	**294**	**31.8**
458.sjeng	**765**	**15.8**	768	15.8	765	15.8	697	17.4	**697**	**17.4**	696	17.4
462.libquantum	438	47.3	417	49.7	**435**	**47.7**	259	80.0	**274**	**75.6**	279	74.2
464.h264ref	**871**	**25.4**	884	25.0	860	25.7	819	27.0	**819**	**27.0**	818	27.1
471.omnetpp	447	14.0	453	13.8	**449**	**13.9**	**450**	**13.9**	449	13.9	450	13.9
473.astar	575	12.2	577	12.2	**575**	**12.2**	**505**	**13.9**	504	13.9	506	13.9
483.xalancbmk	313	22.0	313	22.0	**313**	**22.0**	**295**	**23.4**	295	23.4	295	23.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/spec/amd0905is-libs/64:/spec/amd0905is-libs/32"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<a href="http://developer.amd.com/cpu/open64">http://developer.amd.com/cpu/open64</a>.

System was tested in an open environment.
To ensure system stability, a 1200W (minimum) ATX power supply
[ 8-pin & 8-pin (+12V) and 24-pin ] are required.

Product description can be obtained at:
```

Continued on next page

General Notes (Continued)

http://www.supermicro.com/Aplus/motherboard/Opteron8000/MCP55/H8QM3-2.cfm

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -Ofast -m32 -INLINE:aggressive=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks (except as noted below):
opencc

456.hmmer: pgcc

C++ benchmarks (except as noted below):
openCC

473.astar: pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
-INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnow
-HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
-Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-march=barcelona -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -ipa -LNO:ignore_feedback=off`
`-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2`
`-IPA:pu_reorder=2 -CG:ptr_load_use=0`
`-OPT:unroll_times_max=8 -INLINE:aggressive=on`
`-HP:bdt=2m:heap=2m`

462.libquantum: `-march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off`
`-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0`
`-HP:bdt=2m:heap=2m -OPT:alias=disjoint`
`-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000`

464.h264ref: `-march=barcelona -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000`
`-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0`
`-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m`

C++ benchmarks:

471.omnetpp: `-march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on`
`-OPT:alias=disjoint -WOPT:if_conv=0 -m32`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

473.astar: `-Mpfi`(pass 1) `-Mpfo`(pass 2) `-Mipa=fast`(pass 2)
`-Mipa=inline:6`(pass 2) `-fastsse -O4 -Msmartalloc=huge`
`-Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32`
`-Bstatic_pgi`

483.xalancbmk: `-march=barcelona -Ofast -INLINE:aggressive=on -m32`
`-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

Peak Other Flags

C benchmarks:

456.hmmer: `-Mipa=jobs:4`

C++ benchmarks:

473.astar: `-Mipa=jobs:4`(pass 2)

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd-platform.20090728.html`
`http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html`
`http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.html`

You can also download the XML flags sources by saving the following links:

```
http://www.spec.org/cpu2006/flags/amd-platform.20090728.xml
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.xml
```


SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:28:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 August 2009.