SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/iR110a-1
(Intel Xeon L3110)

SPECfp®_rate2006 = 34.6

SPECfp_rate_base2006 = 33.2

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jul-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

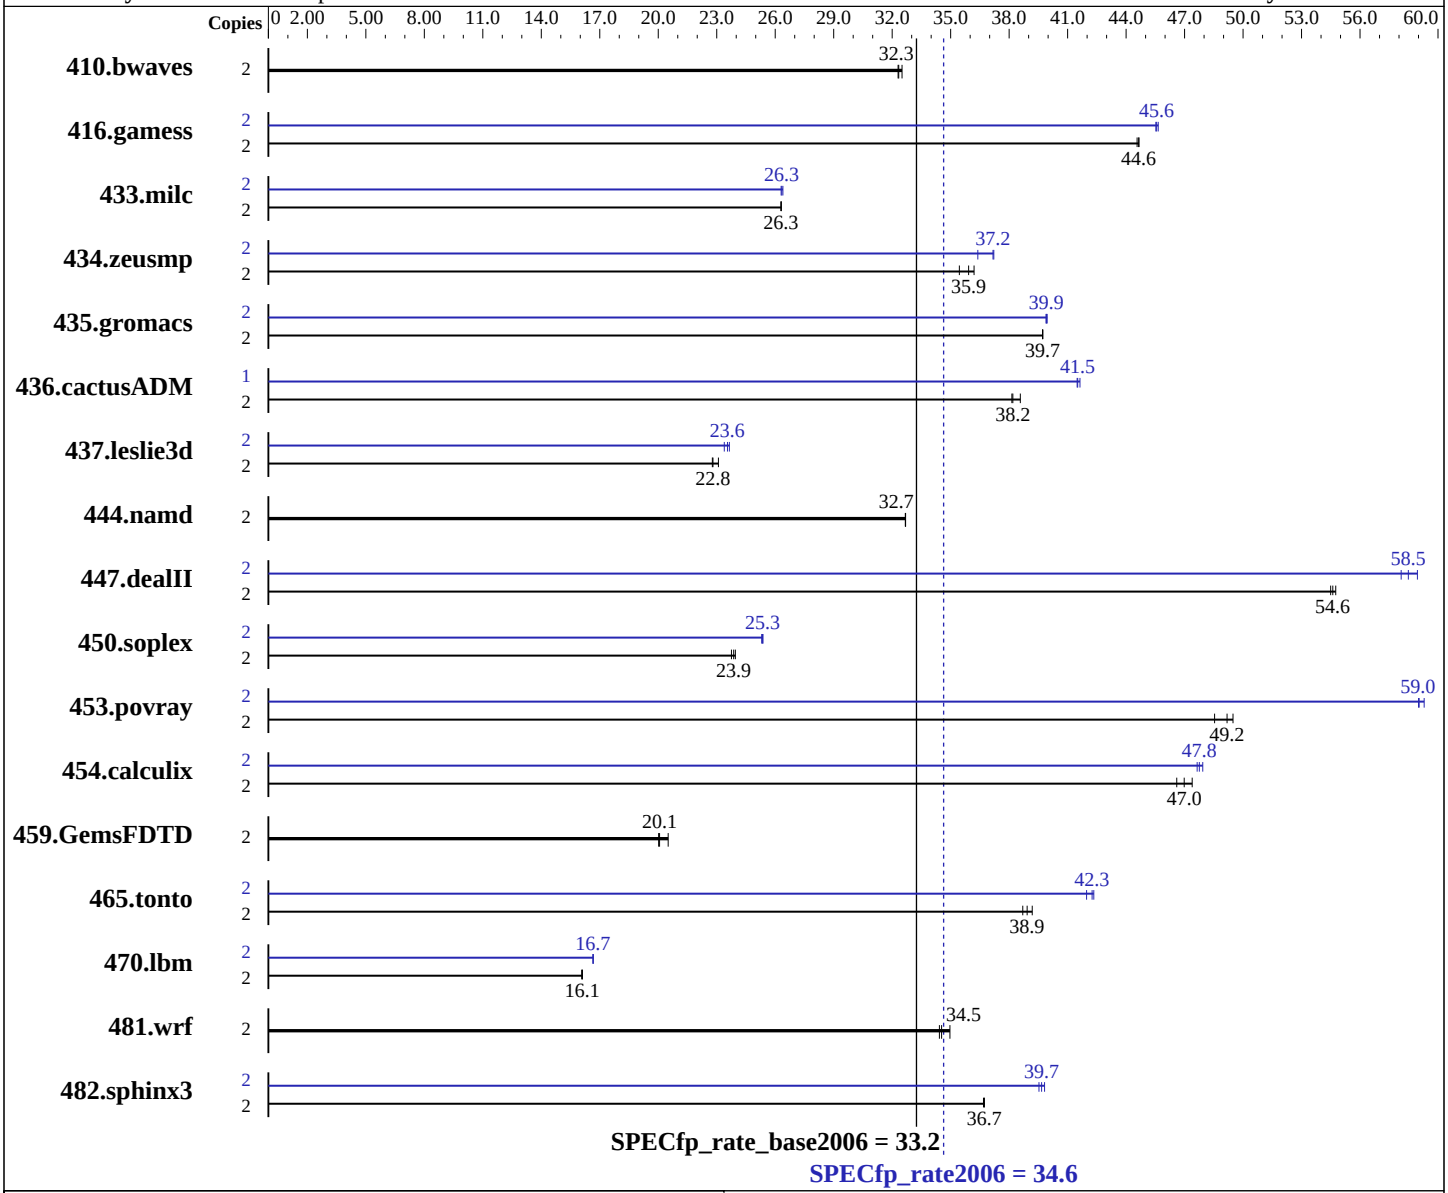

Hardware

CPU Name:	Intel Xeon L3110
CPU Characteristics:	1333 MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.069, l_cprof_p_11.0.069
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/iR110a-1
(Intel Xeon L3110)

SPECfp_rate2006 = 34.6

SPECfp_rate_base2006 = 33.2

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jul-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 8 GB (4x2 GB PC2-6400E, 2 rank, CL6-6-6, ECC)
Disk Subsystem: 1x160 GB SATA2, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	**841**	**32.3**	841	32.3	836	32.5	2	**841**	**32.3**	841	32.3	836	32.5
416.gamess	2	**877**	**44.6**	877	44.7	879	44.6	2	860	45.5	858	45.6	**859**	**45.6**
433.milc	2	**698**	**26.3**	698	26.3	698	26.3	2	**697**	**26.3**	696	26.4	698	26.3
434.zeusmp	2	503	36.2	**507**	**35.9**	513	35.4	2	489	37.2	**490**	**37.2**	500	36.4
435.gromacs	2	**360**	**39.7**	359	39.7	360	39.7	2	358	39.9	**358**	**39.9**	357	40.0
436.cactusADM	2	**626**	**38.2**	620	38.6	627	38.1	1	**288**	**41.5**	287	41.6	288	41.5
437.leslie3d	2	**824**	**22.8**	814	23.1	825	22.8	2	**798**	**23.6**	795	23.6	804	23.4
444.namd	2	491	32.7	**491**	**32.7**	491	32.7	2	491	32.7	**491**	**32.7**	491	32.7
447.dealII	2	**419**	**54.6**	420	54.5	418	54.8	2	388	58.9	**391**	**58.5**	394	58.1
450.soplex	2	702	23.8	696	24.0	**699**	**23.9**	2	**658**	**25.3**	659	25.3	657	25.4
453.povray	2	**216**	**49.2**	219	48.5	215	49.5	2	**180**	**59.0**	180	59.0	179	59.3
454.calculix	2	348	47.4	354	46.6	**351**	**47.0**	2	346	47.6	344	47.9	**346**	**47.8**
459.GemsFDTD	2	1035	20.5	**1057**	**20.1**	1060	20.0	2	1035	20.5	**1057**	**20.1**	1060	20.0
465.tonto	2	502	39.2	**506**	**38.9**	509	38.7	2	469	42.0	**466**	**42.3**	465	42.3
470.lbm	2	**1707**	**16.1**	1706	16.1	1710	16.1	2	**1650**	**16.7**	1650	16.7	1649	16.7
481.wrf	2	639	35.0	649	34.4	**647**	**34.5**	2	639	35.0	649	34.4	**647**	**34.5**
482.sphinx3	2	**1061**	**36.7**	1061	36.7	1063	36.7	2	986	39.5	979	39.8	**983**	**39.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset was used to bind processes to cores except
 for 436.cactusADM peak
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
```

Platform Notes

```
Bios settings:
Hardware Prefetcher:              Enabled
Adjacent Cache Line Prefetch:    Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

482.sphinx3: /opt/intel/Compiler/11.0/069/bin/ia32/icc
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include

C++ benchmarks (except as noted below):
icpc

450.soplex: /opt/intel/Compiler/11.0/069/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include

Fortran benchmarks (except as noted below):
ifort

437.leslie3d: /opt/intel/Compiler/11.0/069/bin/ia32/ifort
-L/opt/intel/Compiler/11.0/069/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/069/ipp/ia32/include

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `-xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.html
http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.xml
http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:35:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 August 2009.