



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

### SPECfp®\_rate2006 = 147

### Motherboard H8DMT+, AMD Opteron 2439 SE

### SPECfp\_rate\_base2006 = 133

CPU2006 license: 001176


Test date: Aug-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

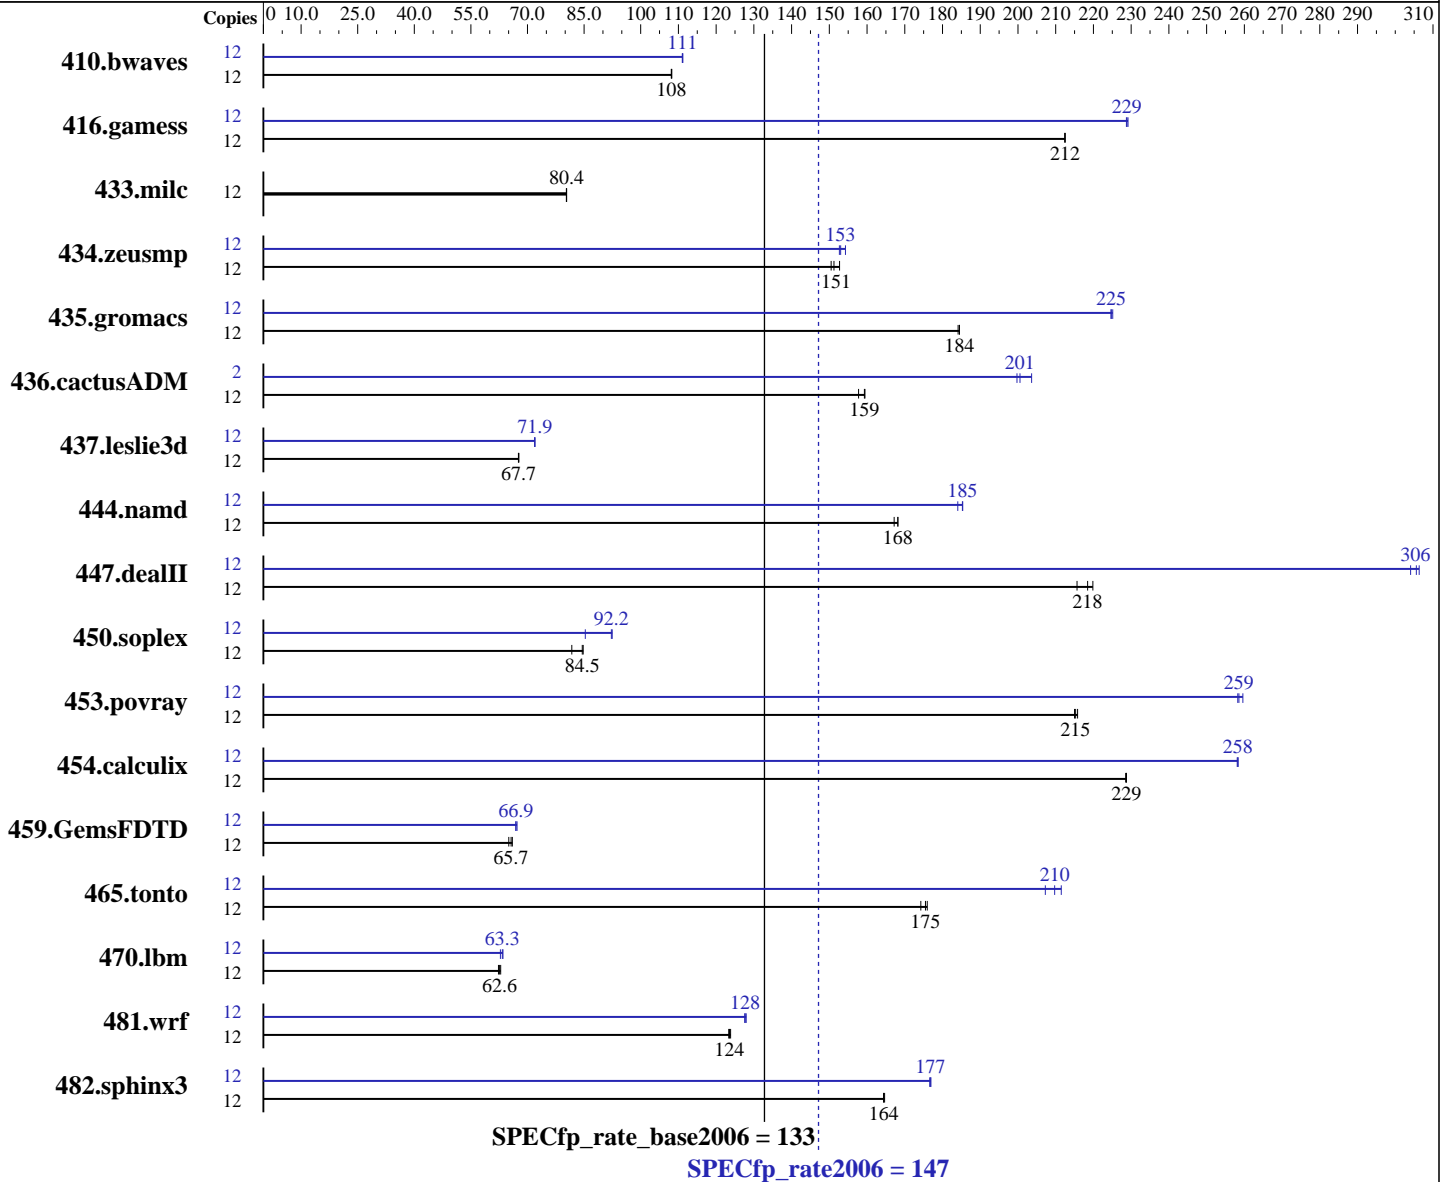

#### Hardware

CPU Name: AMD Opteron 2439 SE  
 CPU Characteristics:  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0  
 x86 Open64 4.2.2 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp\_rate2006 = 147

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECfp\_rate\_base2006 = 133

CPU2006 license: 001176

Test date: Aug-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)  
Disk Subsystem: 1 x 80 GB SATA, 5400 RPM  
Other Hardware: None

Other Software: binutils 2.18

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1508	108	<u>1507</u>	<u>108</u>	1507	108	12	1467	111	<u>1468</u>	<u>111</u>	1469	111
416.gamess	12	1106	212	<u>1106</u>	<u>212</u>	1106	212	12	1025	229	1027	229	<u>1026</u>	<u>229</u>
433.milc	12	1371	80.4	1372	80.3	<u>1371</u>	<u>80.4</u>	12	1371	80.4	1372	80.3	<u>1371</u>	<u>80.4</u>
434.zeusmp	12	726	150	<u>722</u>	<u>151</u>	715	153	12	715	153	708	154	<u>714</u>	<u>153</u>
435.gromacs	12	465	184	<u>464</u>	<u>184</u>	464	184	12	<u>381</u>	<u>225</u>	381	225	381	225
436.cactusADM	12	<u>900</u>	<u>159</u>	909	158	899	159	2	120	200	<u>119</u>	<u>201</u>	117	204
437.leslie3d	12	1666	67.7	<u>1667</u>	<u>67.7</u>	1669	67.6	12	1568	72.0	<u>1568</u>	<u>71.9</u>	1569	71.9
444.namd	12	576	167	572	168	<u>572</u>	<u>168</u>	12	523	184	<u>519</u>	<u>185</u>	519	185
447.dealII	12	637	216	624	220	<u>628</u>	<u>218</u>	12	451	304	<u>449</u>	<u>306</u>	448	306
450.soplex	12	1224	81.7	<u>1184</u>	<u>84.5</u>	1181	84.8	12	1173	85.3	<u>1085</u>	<u>92.2</u>	1083	92.5
453.povray	12	297	215	<u>297</u>	<u>215</u>	296	216	12	<u>247</u>	<u>259</u>	247	258	246	260
454.calculix	12	433	229	<u>433</u>	<u>229</u>	433	229	12	384	258	<u>383</u>	<u>258</u>	383	258
459.GemsFDTD	12	<u>1939</u>	<u>65.7</u>	1957	65.0	1929	66.0	12	1903	66.9	<u>1902</u>	<u>66.9</u>	1894	67.2
465.tonto	12	678	174	<u>673</u>	<u>175</u>	671	176	12	570	207	<u>563</u>	<u>210</u>	558	211
470.lbm	12	2646	62.3	2621	62.9	<u>2634</u>	<u>62.6</u>	12	2596	63.5	2625	62.8	<u>2604</u>	<u>63.3</u>
481.wrf	12	1082	124	1087	123	<u>1085</u>	<u>124</u>	12	1047	128	<u>1049</u>	<u>128</u>	1051	128
482.sphinx3	12	1420	165	<u>1422</u>	<u>164</u>	1423	164	12	1322	177	1324	177	<u>1322</u>	<u>177</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=5400 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp\_rate2006 = 147**

**Motherboard H8DMT+, AMD Opteron 2439 SE**

**SPECfp\_rate\_base2006 = 133**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Aug-2009  
**Hardware Availability:** Jun-2009  
**Software Availability:** Apr-2009

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "450"

LD\_LIBRARY\_PATH = "/usr/cpu2006/amd0905is-libs/64:/usr/cpu2006/amd0905is-libs/32"

NCPUS = "6"

PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

System can be built with CSE-808T-980(B/V) Revision A4

Product description can be obtained at:

<http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DMT+.cfm>

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp\_rate2006 = 147**

Motherboard H8DMT+, AMD Opteron 2439 SE

**SPECfp\_rate\_base2006 = 133**

**CPU2006 license:** 001176

**Test date:** Aug-2009

**Test sponsor:** Supermicro

**Hardware Availability:** Jun-2009

**Tested by:** Supermicro

**Software Availability:** Apr-2009

## Base Optimization Flags

C benchmarks:

```
-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Bstatic_pgi
```

C++ benchmarks:

```
-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic_pgi
```

Fortran benchmarks:

```
-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Mvect=short -Bstatic_pgi
```

## Base Other Flags

C benchmarks:

```
-Mipa=jobs:4
```

C++ benchmarks:

```
-Mipa=jobs:4
```

Fortran benchmarks:

```
-Mipa=jobs:4
```

Benchmarks using both Fortran and C:

```
-Mipa=jobs:4
```

## Peak Compiler Invocation

C benchmarks:

```
pgcc
```

C++ benchmarks (except as noted below):

```
openCC
```

```
444.namd: pgcpp
```

Fortran benchmarks (except as noted below):

```
openf95
```

```
410.bwaves: pgf95
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 147

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECfp\_rate\_base2006 = 133

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Aug-2009  
Hardware Availability: Jun-2009  
Software Availability: Apr-2009

## Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32  
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64  
-Bstatic\_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic\_pgi

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8  
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc\_eh  
-tp shanghai-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 147

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECfp\_rate\_base2006 = 133

CPU2006 license: 001176

Test date: Aug-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m  
-GRA:unspill=on -CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
-CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

### Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0  
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8  
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525 -HP

### Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 147

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECfp\_rate\_base2006 = 133

CPU2006 license: 001176

Test date: Aug-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

454.calculix (continued):

-Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge

-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64

-Bstatic\_pgi

## Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.html>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090914.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.html)

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090914.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.xml)

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 147

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECfp\_rate\_base2006 = 133

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Aug-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 02:42:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 September 2009.