



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 38.3

IBM System x3250 M3 (Intel Xeon X3470)

SPECfp_base2006 = 36.8

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2009

Hardware Availability: Oct-2009

Software Availability: Feb-2009

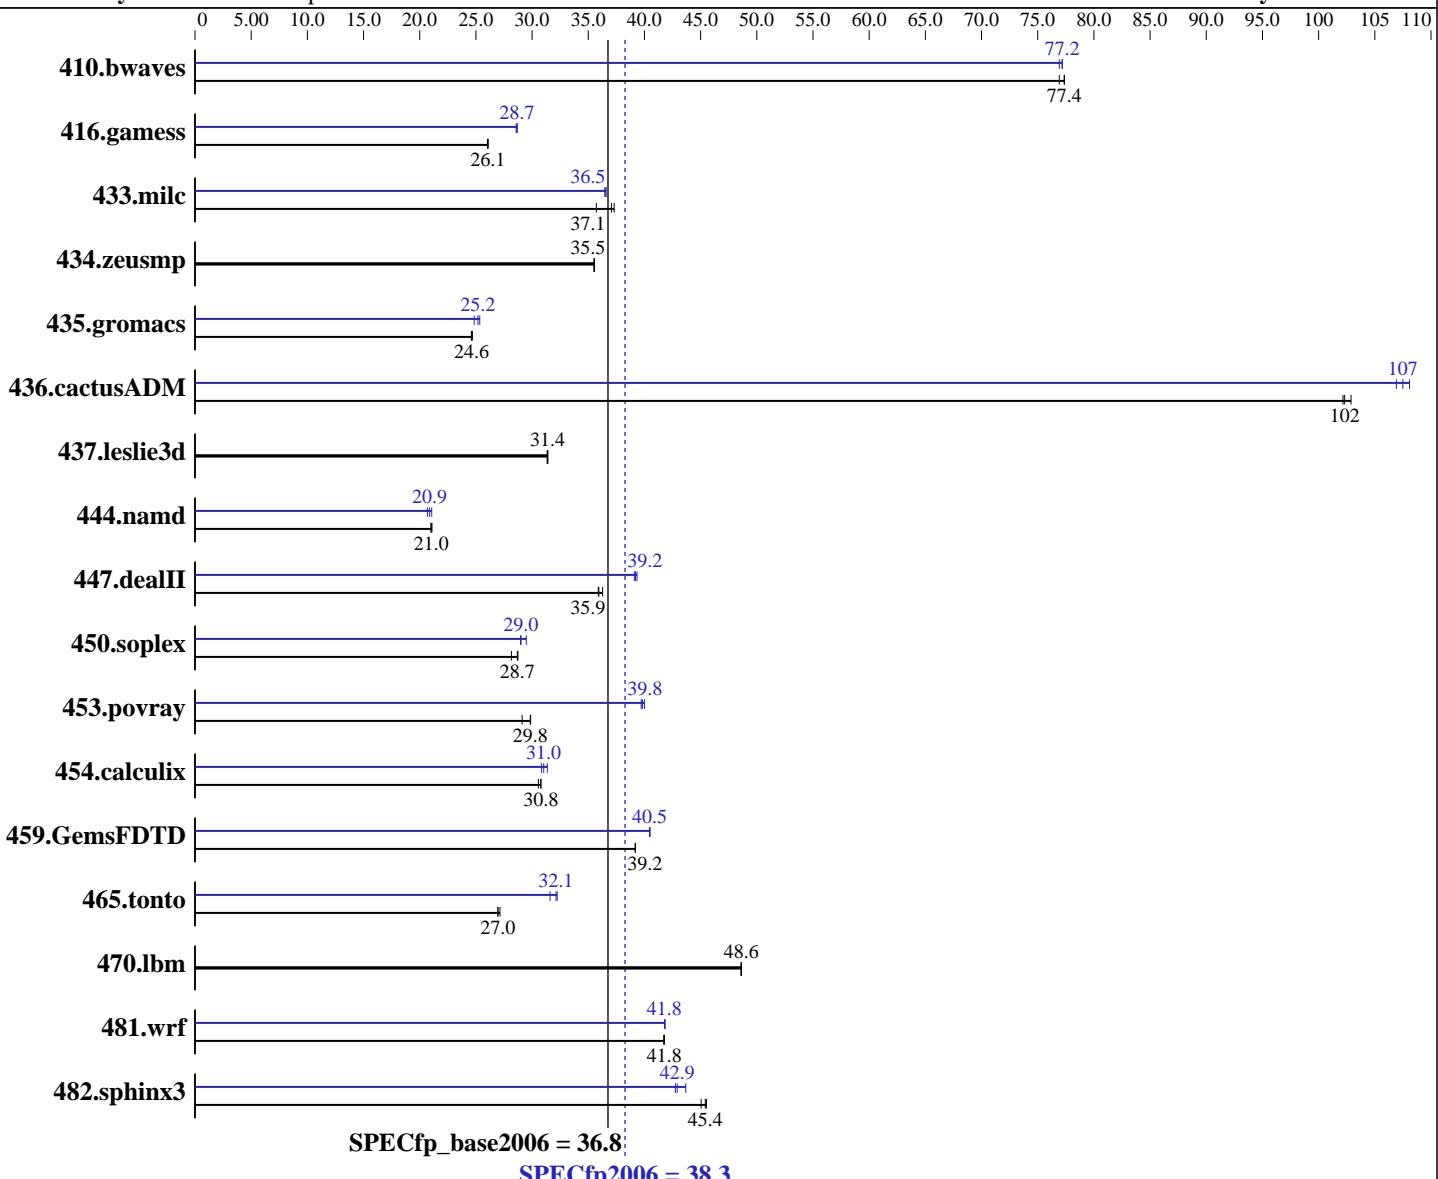

Hardware

CPU Name: Intel Xeon X3470
CPU Characteristics: Intel Turbo Boost Technology up to 3.6 GHz
CPU MHz: 2933
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SuSE Linux Enterprise Server 11(x86_64), Kernel 2.6.27.19-5-default
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
Auto Parallel: Yes
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	38.3
IBM System x3250 M3 (Intel Xeon X3470)	SPECfp_base2006 =	36.8
CPU2006 license: 11	Test date:	Sep-2009
Test sponsor: IBM Corporation	Hardware Availability:	Oct-2009
Tested by: IBM Corporation	Software Availability:	Feb-2009
L3 Cache: 8 MB I+D on chip per chip Other Cache: None Memory: 16 GB(4 x 4 GB PC3-10600R) Disk Subsystem: 1 x 73 GB SAS, 15000 RPM Other Hardware: None	Peak Pointers: Other Software:	32/64-bit Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	177	76.9	176	77.4	176	77.4	176	77.2	176	77.2	177	76.9
416.gamess	752	26.0	751	26.1	751	26.1	683	28.7	683	28.7	685	28.6
433.milc	246	37.3	257	35.7	248	37.1	251	36.5	252	36.5	251	36.6
434.zeusmp	256	35.5	256	35.6	256	35.5	256	35.5	256	35.6	256	35.5
435.gromacs	290	24.6	290	24.6	289	24.7	287	24.8	282	25.3	284	25.2
436.cactusADM	117	102	117	102	116	103	112	107	111	108	111	107
437.leslie3d	300	31.4	299	31.4	300	31.3	300	31.4	299	31.4	300	31.3
444.namd	381	21.0	380	21.1	382	21.0	384	20.9	388	20.7	381	21.1
447.dealII	315	36.3	318	35.9	319	35.9	293	39.1	292	39.2	291	39.3
450.soplex	291	28.7	296	28.2	290	28.7	283	29.5	288	29.0	287	29.0
453.povray	178	29.8	183	29.1	178	29.9	134	39.8	133	40.0	134	39.7
454.calculix	268	30.8	268	30.8	270	30.6	263	31.4	266	31.0	267	30.8
459.GemsFDTD	271	39.2	271	39.2	271	39.2	262	40.5	262	40.5	262	40.5
465.tonto	363	27.1	365	27.0	365	26.9	306	32.1	311	31.6	305	32.2
470.lbm	283	48.6	283	48.6	283	48.6	283	48.6	283	48.6	283	48.6
481.wrf	267	41.8	268	41.8	268	41.7	267	41.8	267	41.8	267	41.8
482.sphinx3	429	45.4	433	45.0	428	45.5	456	42.8	446	43.7	454	42.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

CPU C-States Enable and Adjacent Sector Prefetch Enable
Turbo Mode Enable
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	38.3
IBM System x3250 M3 (Intel Xeon X3470)	SPECfp_base2006 =	36.8
CPU2006 license: 11	Test date:	Sep-2009
Test sponsor: IBM Corporation	Hardware Availability:	Oct-2009
Tested by: IBM Corporation	Software Availability:	Feb-2009

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 38.3

IBM System x3250 M3 (Intel Xeon X3470)

SPECfp_base2006 = 36.8

CPU2006 license: 11

Test date: Sep-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xsse4.2 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 38.3

IBM System x3250 M3 (Intel Xeon X3470)

SPECfp_base2006 = 36.8

CPU2006 license: 11

Test date: Sep-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

```
447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -unroll12 -ansi-alias -scalar-rep -opt-prefetch
```

```
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -opt-malloc-options=3
```

```
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll14 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
            -parallel
```

```
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll12 -Ob0 -ansi-alias -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                -unroll12 -Ob0 -opt-prefetch -parallel
```

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -unroll14 -auto
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -opt-prefetch -auto-ilp32
```

```
436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                 -unroll12 -opt-prefetch -parallel -auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 38.3

IBM System x3250 M3 (Intel Xeon X3470)

SPECfp_base2006 = 36.8

CPU2006 license: 11

Test date: Sep-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20091002.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20091002.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Sep 23 18:32:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 October 2009.