SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon E5530, 2.40 GHz

SPECint®_rate2006 = 107

SPECint_rate_base2006 = 99.6

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Sep-2009
Hardware Availability: Jun-2009
Software Availability: Feb-2009

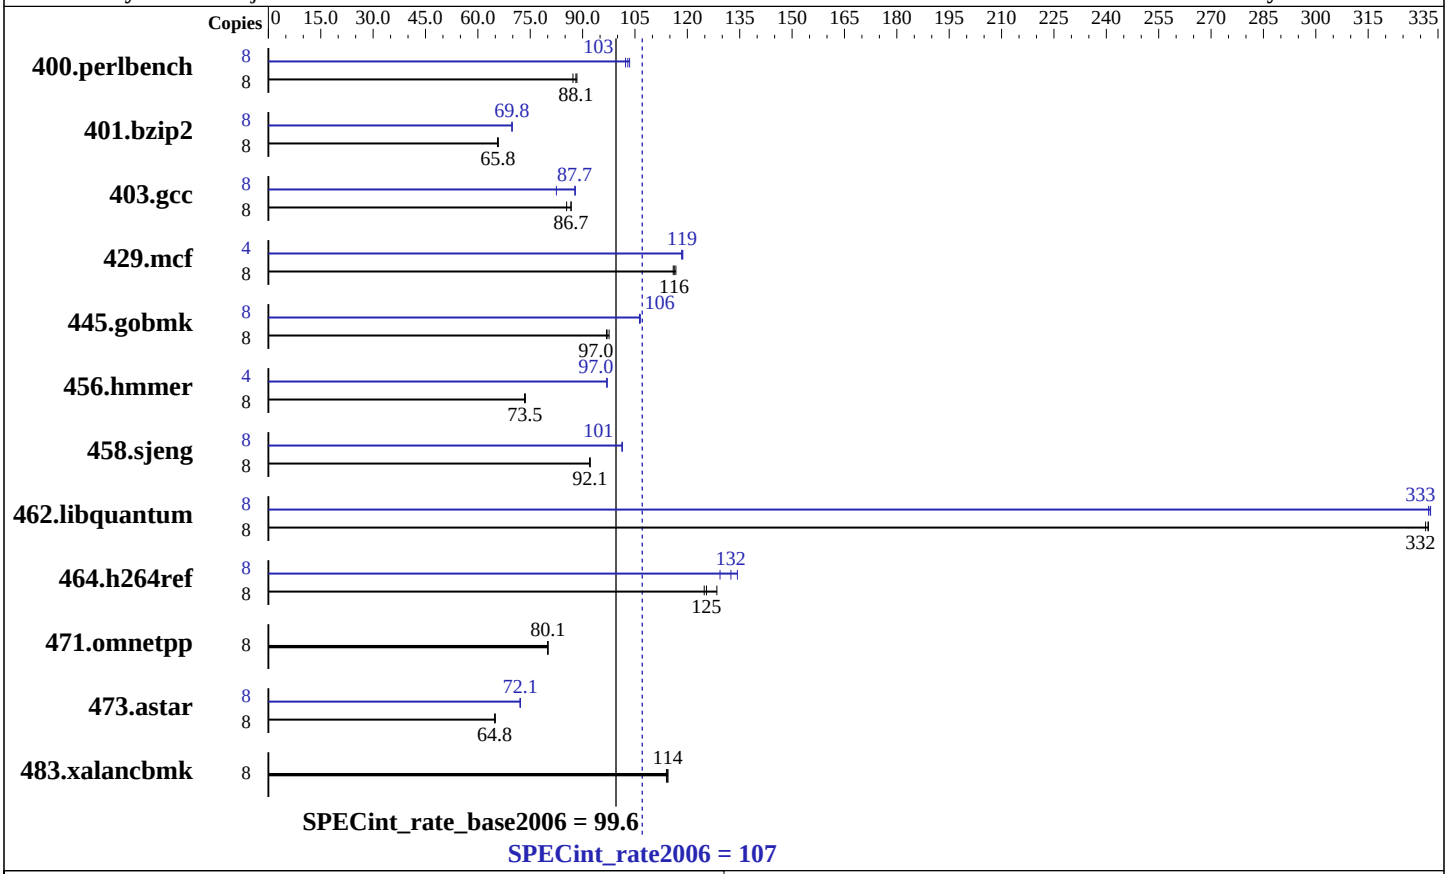

Hardware

CPU Name:	Intel Xeon E5530
CPU Characteristics:	Intel Turbo Boost Technology up to 2.67 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)
Disk Subsystem:	1 x SATA, 250 GB, 7200 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
Auto Parallel:	No
File System:	ext3
System State:	Multi-User Run Level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon E5530, 2.40 GHz

SPECint_rate2006 = 107

SPECint_rate_base2006 = 99.6

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Sep-2009
Hardware Availability: Jun-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**887**	**88.1**	884	88.4	896	87.2	8	755	103	764	102	**759**	**103**
401.bzip2	8	1173	65.8	**1174**	**65.8**	1176	65.6	8	1106	69.8	**1106**	**69.8**	1107	69.8
403.gcc	8	742	86.7	754	85.4	**743**	**86.7**	8	**734**	**87.7**	732	87.9	781	82.5
429.mcf	8	**628**	**116**	625	117	629	116	4	**308**	**119**	308	118	307	119
445.gobmk	8	**865**	**97.0**	860	97.6	867	96.8	8	788	107	**789**	**106**	790	106
456.hmmer	8	1015	73.6	**1015**	**73.5**	1017	73.4	4	385	97.0	385	96.9	**385**	**97.0**
458.sjeng	8	1050	92.2	**1051**	**92.1**	1052	92.0	8	**955**	**101**	955	101	956	101
462.libquantum	8	499	332	500	331	**499**	**332**	8	**498**	**333**	498	333	499	332
464.h264ref	8	1418	125	1378	128	**1411**	**125**	8	1318	134	1369	129	**1336**	**132**
471.omnetpp	8	625	80.0	624	80.1	**625**	**80.1**	8	625	80.0	624	80.1	**625**	**80.1**
473.astar	8	864	65.0	866	64.8	**866**	**64.8**	8	779	72.1	**778**	**72.1**	778	72.2
483.xalancbmk	8	482	114	484	114	**483**	**114**	8	482	114	484	114	**483**	**114**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 1066 MHz.

General Notes

For information about Fujitsu please visit: http://www.fujitsu.com

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):
icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Peak Portability Flags (Continued)

473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090901.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090901.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:42:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 October 2009.