SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T820 F2 (Intel Xeon X3460, 2.80 GHz)

SPECfp®2006 = 36.4

SPECfp_base2006 = 35.0

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Nov-2009
Hardware Availability: Dec-2009
Software Availability: Jul-2009

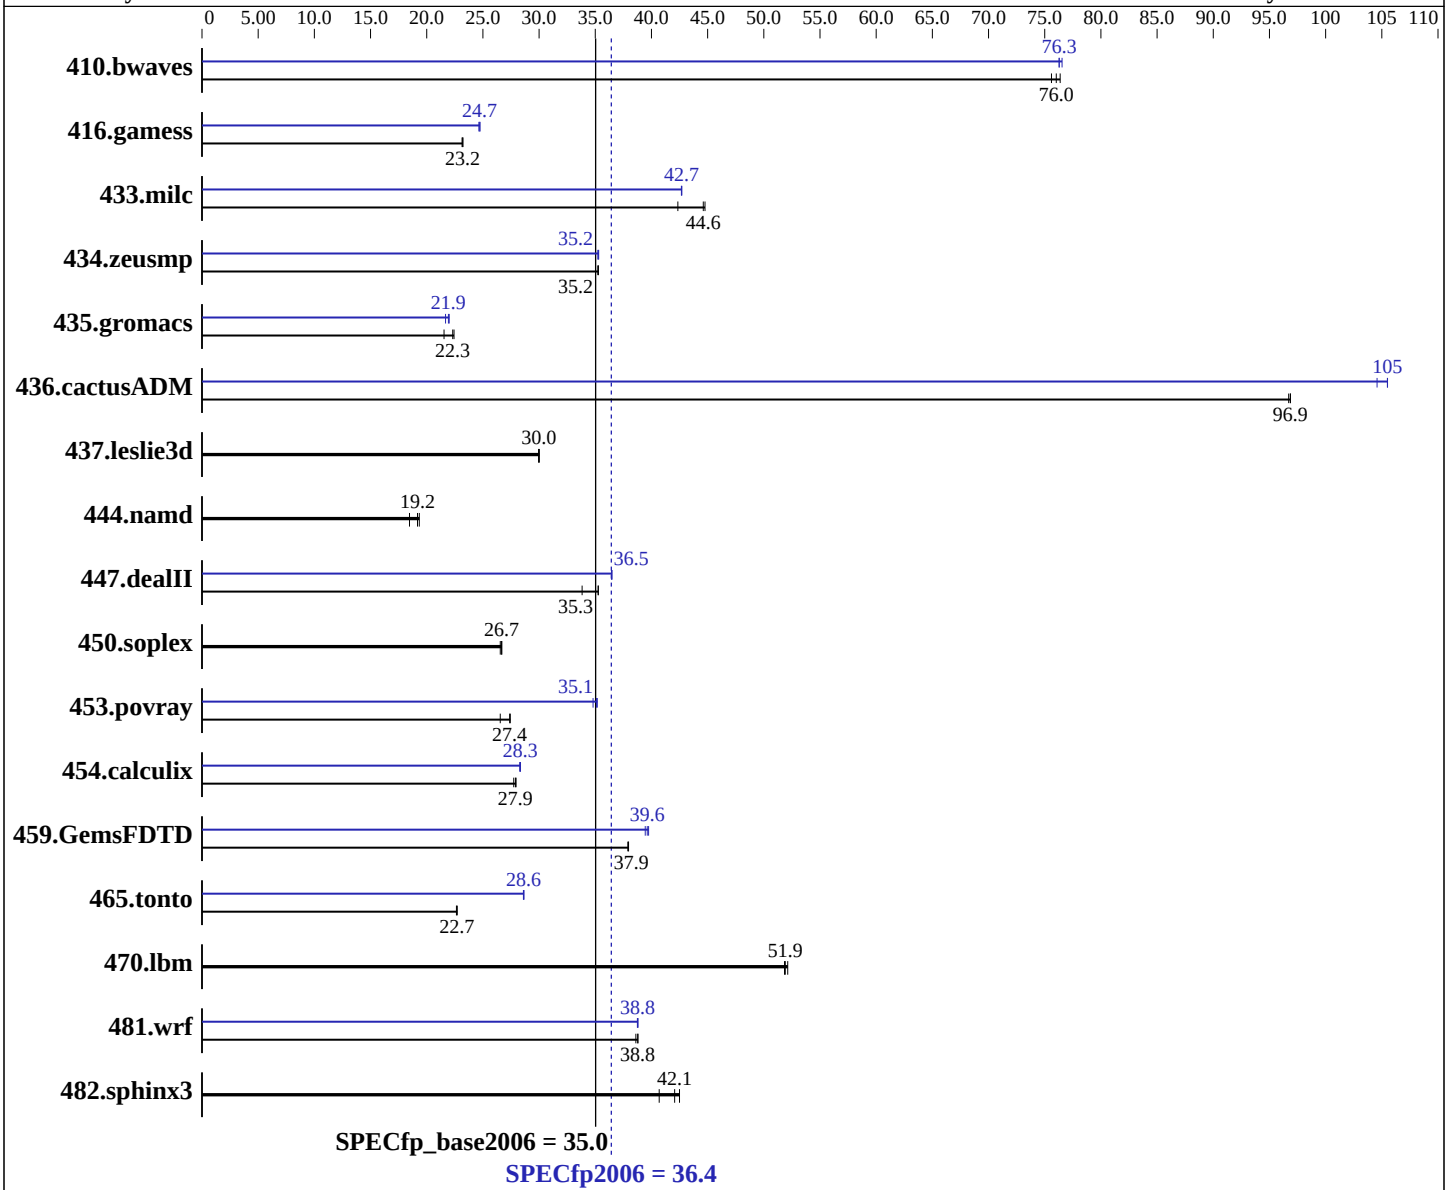

Hardware

CPU Name:	Intel Xeon X3460
CPU Characteristics:	Intel Turbo Boost Technology up to 3.46 GHz
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	Intel Fortran Compiler and Intel C++ Compiler Professional Edition 11.1 For Linux Build 20090511 Package ID: l_cproc_p_11.1.040, l_cprof_p_11.1.040
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T820 F2 (Intel Xeon X3460, 2.80 GHz)

SPECfp2006 = 36.4

SPECfp_base2006 = 35.0

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Nov-2009
Hardware Availability: Dec-2009
Software Availability: Jul-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (4 x 2 GB DDR3-1333 DR RDIMM)
Disk Subsystem: 1 x 160 GB 7200 RPM SATA
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	178	76.4	**179**	**76.0**	180	75.6	**178**	**76.3**	178	76.5	178	76.3
416.gamess	846	23.1	843	23.2	**844**	**23.2**	791	24.7	795	24.6	**792**	**24.7**
433.milc	**206**	**44.6**	217	42.4	205	44.8	**215**	**42.7**	215	42.7	215	42.7
434.zeusmp	258	35.3	258	35.2	**258**	**35.2**	258	35.3	258	35.2	**258**	**35.2**
435.gromacs	318	22.4	331	21.5	**320**	**22.3**	329	21.7	325	22.0	**326**	**21.9**
436.cactusADM	123	96.9	**123**	**96.9**	124	96.7	114	105	**113**	**105**	113	106
437.leslie3d	314	30.0	313	30.0	**314**	**30.0**	314	30.0	313	30.0	**314**	**30.0**
444.namd	415	19.3	434	18.5	**418**	**19.2**	415	19.3	434	18.5	**418**	**19.2**
447.dealII	324	35.3	338	33.8	**325**	**35.3**	314	36.5	314	36.5	**314**	**36.5**
450.soplex	313	26.7	314	26.5	**313**	**26.7**	313	26.7	314	26.5	**313**	**26.7**
453.povray	194	27.4	**194**	**27.4**	200	26.5	153	34.8	151	35.2	**152**	**35.1**
454.calculix	297	27.7	**296**	**27.9**	295	28.0	292	28.3	**291**	**28.3**	291	28.3
459.GemsFDTD	280	37.9	279	38.0	**280**	**37.9**	269	39.4	**268**	**39.6**	267	39.7
465.tonto	**434**	**22.7**	435	22.6	433	22.7	344	28.6	**344**	**28.6**	343	28.7
470.lbm	264	52.1	**265**	**51.9**	265	51.8	264	52.1	**265**	**51.9**	265	51.8
481.wrf	289	38.6	288	38.8	**288**	**38.8**	**288**	**38.8**	288	38.7	288	38.8
482.sphinx3	**463**	**42.1**	459	42.5	479	40.7	**463**	**42.1**	459	42.5	479	40.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Platform Notes

```
BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
```

General Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
The Dell PowerEdge T310 (Intel Xeon X3460, 2.80 GHz) and
the Bull NovaScale T820 F2 (Intel Xeon X3460, 2.80 GHz) models are electronically equivalent.
The results have been measured on a Dell PowerEdge T310 (Intel Xeon X3460, 2.80 GHz) model.
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
     410.bwaves: -DSPEC_CPU_LP64
     416.gamess: -DSPEC_CPU_LP64
       433.milc: -DSPEC_CPU_LP64
     434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
       465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-fno-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `basepeak = yes`

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias -scalar-rep- -opt-prefetch`

450.soplex: `basepeak = yes`

453.povray: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel`

416.gamess: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `Same as 410.bwaves`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -opt-prefetch -parallel`

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revA.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revA.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:45:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 December 2009.