SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon E5504, 2.00 GHz)

SPECint®2006 = 21.2

SPECint_base2006 = 19.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

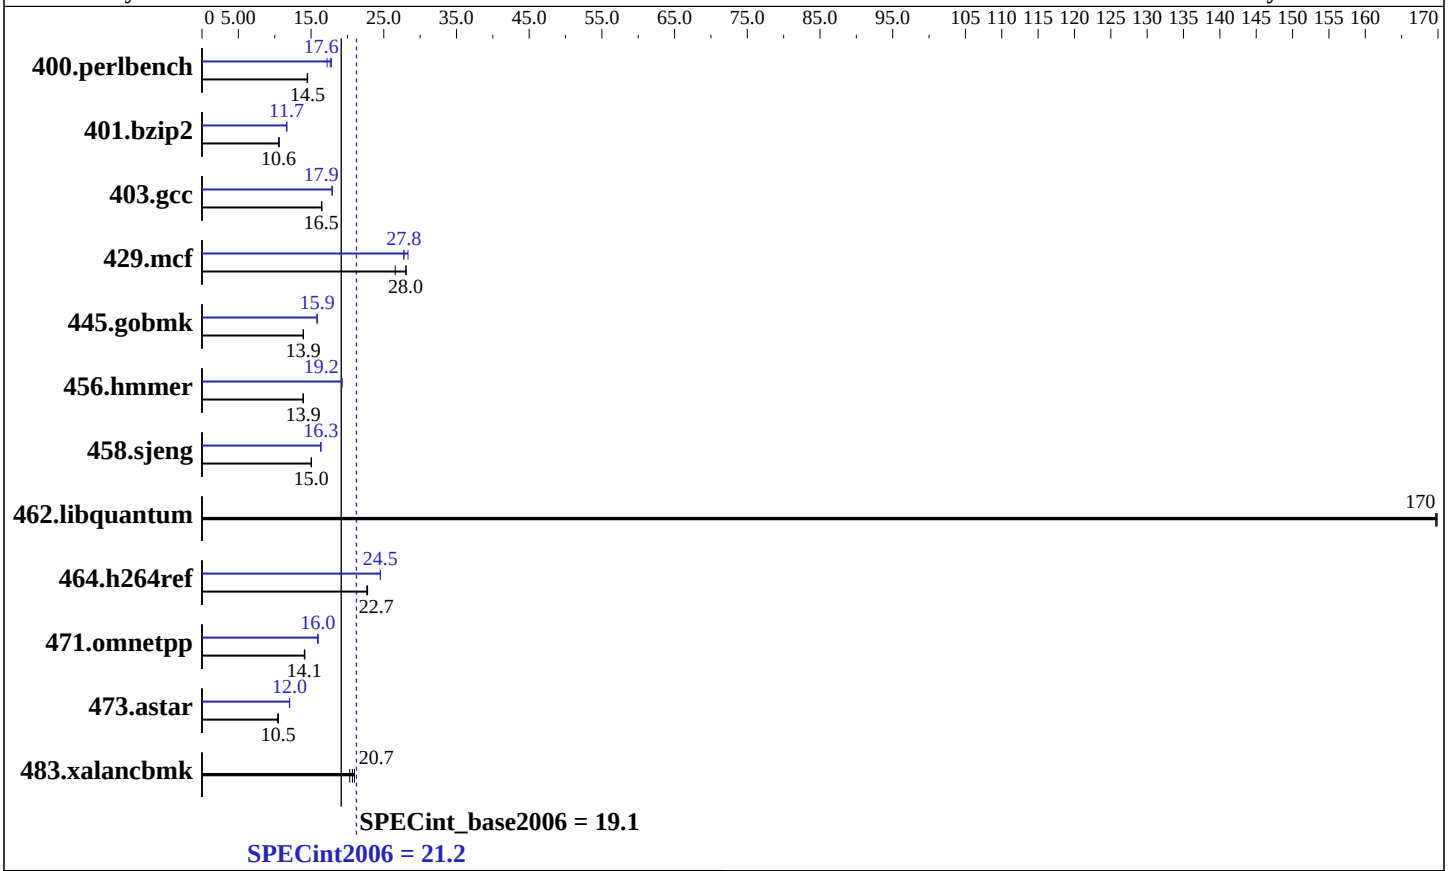

Hardware

CPU Name:	Intel Xeon E5504
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6 x 4 GB PC3-10600R, 2 Rank, running at 800 MHz)
Disk Subsystem:	1 x 73 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265
(Intel Xeon E5504, 2.00 GHz)

SPECint2006 = 21.2

SPECint_base2006 = 19.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2010
Hardware Availability: May-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**673**	**14.5**	673	14.5	675	14.5	**554**	**17.6**	549	17.8	568	17.2
401.bzip2	916	10.5	**914**	**10.6**	909	10.6	828	11.7	830	11.6	**828**	**11.7**
403.gcc	488	16.5	**489**	**16.5**	490	16.4	**450**	**17.9**	450	17.9	449	17.9
429.mcf	343	26.6	325	28.1	**325**	**28.0**	322	28.3	328	27.8	**328**	**27.8**
445.gobmk	752	13.9	**752**	**13.9**	753	13.9	661	15.9	**661**	**15.9**	664	15.8
456.hmmer	671	13.9	670	13.9	**670**	**13.9**	485	19.2	485	19.2	**485**	**19.2**
458.sjeng	804	15.0	**805**	**15.0**	805	15.0	**740**	**16.3**	741	16.3	740	16.3
462.libquantum	122	170	**122**	**170**	122	170	122	170	**122**	**170**	122	170
464.h264ref	972	22.8	**975**	**22.7**	975	22.7	**902**	**24.5**	902	24.5	902	24.5
471.omnetpp	444	14.1	**443**	**14.1**	442	14.2	393	15.9	391	16.0	**392**	**16.0**
473.astar	674	10.4	668	10.5	**670**	**10.5**	**583**	**12.0**	583	12.0	584	12.0
483.xalancbmk	**334**	**20.7**	329	21.0	340	20.3	**334**	**20.7**	329	21.0	340	20.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -par-runtime-control -opt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

456.hmmer: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

458.sjeng: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

C++ benchmarks (except as noted below):
`icpc`

473.astar: `/opt/intel/Compiler/11.0/080/bin/intel64/icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20100202.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20100202.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 05:50:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 February 2010.