SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810 F2 (Intel Core i3-540, 3.06 GHz)

SPECint®2006 = 28.5

SPECint_base2006 = 25.5

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Jan-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

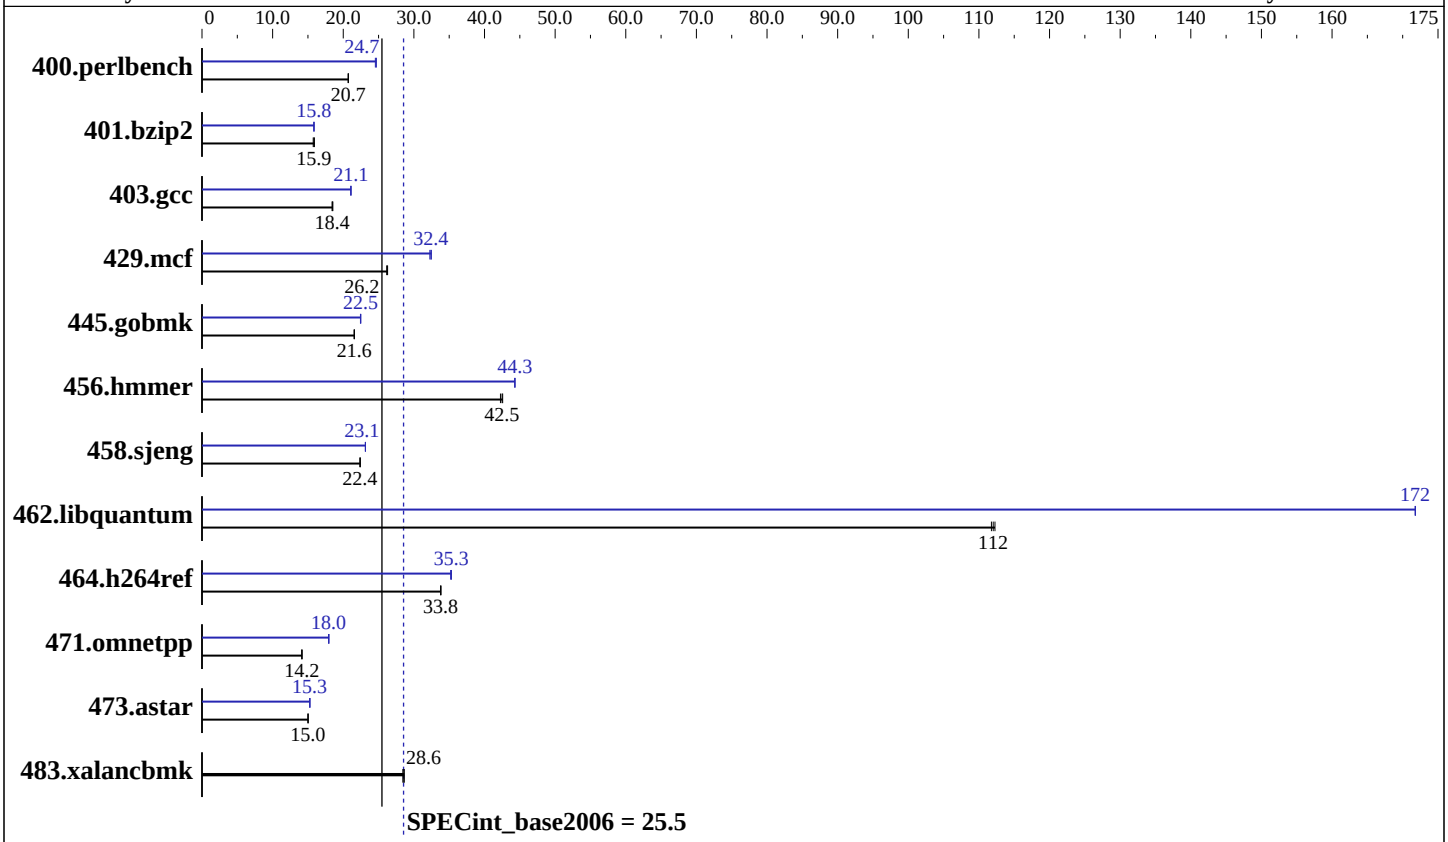

Hardware

CPU Name:	Intel Core i3-540
CPU Characteristics:	
CPU MHz:	3067
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (4 x 2 GB DDR3-1333 DR UDIMM)
Disk Subsystem:	1 x 160 GB 7200 RPM SATA
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	Intel C++ Compiler Professional Edition 11.1 for Linux Build 20091012 Package ID: l_cproc_p_11.1.059
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T810 F2 (Intel Core i3-540, 3.06 GHz)

SPECint2006 = 28.5

SPECint_base2006 = 25.5

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Jan-2010
Hardware Availability: Jan-2010
Software Availability: Dec-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	472	20.7	**472**	**20.7**	472	20.7	398	24.5	**396**	**24.7**	396	24.7
401.bzip2	606	15.9	**609**	**15.9**	613	15.7	608	15.9	**609**	**15.8**	609	15.8
403.gcc	434	18.5	437	18.4	**436**	**18.4**	**382**	**21.1**	382	21.1	382	21.1
429.mcf	347	26.3	348	26.2	**348**	**26.2**	283	32.3	281	32.5	**281**	**32.4**
445.gobmk	486	21.6	**487**	**21.6**	487	21.5	467	22.5	**467**	**22.5**	468	22.4
456.hmmer	221	42.3	219	42.6	**220**	**42.5**	211	44.3	**211**	**44.3**	211	44.3
458.sjeng	540	22.4	**541**	**22.4**	541	22.4	523	23.1	**523**	**23.1**	523	23.1
462.libquantum	**185**	**112**	185	112	185	112	121	172	**121**	**172**	121	172
464.h264ref	654	33.8	**655**	**33.8**	655	33.8	627	35.3	629	35.2	**627**	**35.3**
471.omnetpp	441	14.2	**442**	**14.2**	442	14.1	**348**	**18.0**	348	18.0	348	17.9
473.astar	467	15.0	**468**	**15.0**	468	15.0	**460**	**15.3**	460	15.3	460	15.3
483.xalancbmk	241	28.6	**241**	**28.6**	243	28.4	241	28.6	**241**	**28.6**	243	28.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Platform Notes

```
BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
```

General Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
The Dell PowerEdge T110 and the Bull NovaScale T810 F2 models are electronically equivalent.
This result was measured on a Dell PowerEdge T110.
```

Base Compiler Invocation

C benchmarks:

```
icc  -m64
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

Continued on next page

Peak Compiler Invocation (Continued)

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

471.omnetpp: `icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2)
`-prof-use`(pass 2) `-ansi-alias -opt-prefetch`

401.bzip2: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div -static`(pass 2) `-prof-use`(pass 2)
`-auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc`
`-opt-malloc-options=3 -auto-ilp32`

429.mcf: `-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

445.gobmk: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-prof-use`(pass 2) `-O2`
`-ipo -no-prec-div -ansi-alias`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2`
`-ansi-alias -auto-ilp32`

458.sjeng: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2)
`-prof-use`(pass 2) `-unroll4`

Continued on next page

Peak Optimization Flags (Continued)

462.libquantum: `-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -par-schedule-static=32768 -ansi-alias`

464.h264ref: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap`

473.astar: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.20100216.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.20100216.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:38:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 February 2010.