SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power 755 (3.3 GHz, 32 core, SLES)

SPECint®_rate2006 = 1030

SPECint_rate_base2006 = 924

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jan-2010
Hardware Availability: Feb-2010
Software Availability: Dec-2009

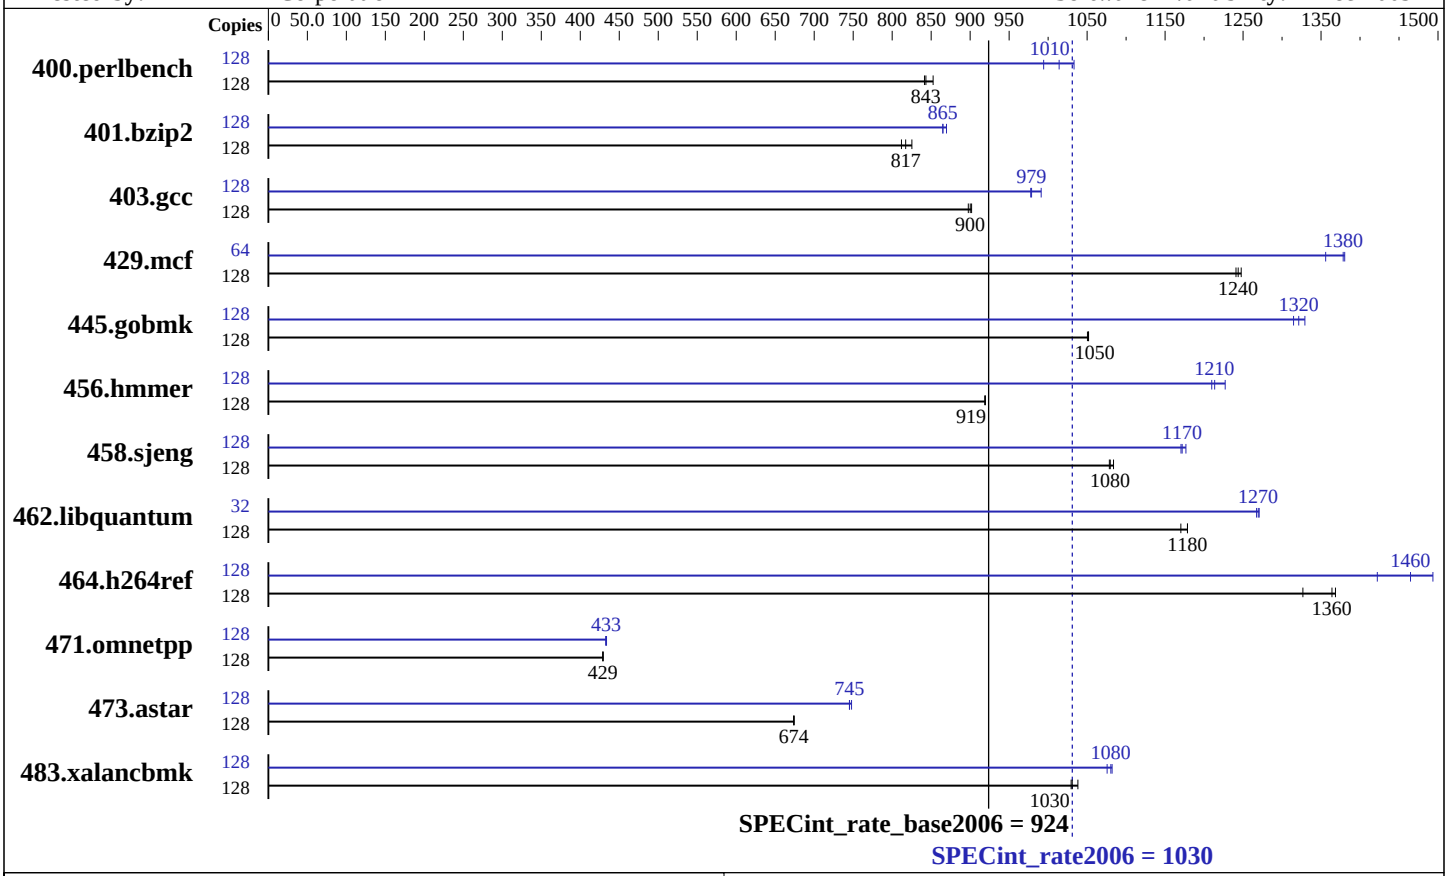

Hardware

CPU Name:	POWER7
CPU Characteristics:	Intelligent Energy Optimization enabled, up to 3.64 GHz
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip, 4 threads/core
CPU(s) orderable:	32 cores
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per core
Other Cache:	None
Memory:	256 GB (32x8 GB) DDR3 1066 MHz
Disk Subsystem:	8x146.8 GB SAS SFF 15K RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (ppc64), Kernel 2.6.27.19-5-ppc64
Compiler:	IBM XL C/C++ for Linux, V10.1 Updated with the Oct2009 PTF
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	-Post-Link Optimization for Linux on POWER, Version 5.5.0-1 -MicroQuill SmartHeap 9

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power 755 (3.3 GHz, 32 core, SLES)

SPECint_rate2006 = 1030

SPECint_rate_base2006 = 924

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jan-2010
Hardware Availability: Feb-2010
Software Availability: Dec-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	1486	841	**1483**	**843**	1467	853	128	1258	994	1210	1030	**1233**	**1010**
401.bzip2	128	1497	825	1521	812	**1511**	**817**	128	**1428**	**865**	1428	865	1420	870
403.gcc	128	1148	898	1143	902	**1145**	**900**	128	1054	978	1040	991	**1053**	**979**
429.mcf	128	**939**	**1240**	936	1250	941	1240	64	430	1360	423	1380	**423**	**1380**
445.gobmk	128	1278	1050	**1277**	**1050**	1277	1050	128	1010	1330	1021	1310	**1016**	**1320**
456.hmmer	128	1300	919	1299	920	**1300**	**919**	128	973	1230	**984**	**1210**	987	1210
458.sjeng	128	1436	1080	1429	1080	**1434**	**1080**	128	**1322**	**1170**	1323	1170	1316	1180
462.libquantum	128	2250	1180	**2250**	**1180**	2266	1170	32	522	1270	523	1270	**522**	**1270**
464.h264ref	128	2135	1330	**2077**	**1360**	2070	1370	128	1897	1490	**1934**	**1460**	1992	1420
471.omnetpp	128	**1865**	**429**	1865	429	1863	429	128	1849	433	1845	434	**1847**	**433**
473.astar	128	1333	674	1334	674	**1333**	**674**	128	1201	748	1206	745	**1206**	**745**
483.xalancbmk	128	**857**	**1030**	851	1040	858	1030	128	821	1080	**817**	**1080**	816	1080

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
ulimit -s (stack) set to 1048576.
Large pages reserved as follows by root user:
    echo 7040 > /proc/sys/vm/nr_hugepages
System configured with libhugetlbfs library for application access to large pages
Environment variables set before executing benchmarks.
    export HUGETLB_VERBOSE=0
    export HUGETLB_MORECORE=yes
    export XLFRTEOPTS=intrinthds=1
```

General Notes

```
The "IBM Power 750 Express (3.3 GHz)" and "IBM Power 755 (3.3 GHz)"
are electronically equivalent. The results have been measured on the
"IBM Power 755 (3.3 GHz)"

IBM Post-Link Optimization tool with
options "-O4 -omullX -see 0 -m power6" used for
    400.perlbench 401.bzip2 403.gcc 456.hmmer 458.sjeng
    483.xalancbmk
options "-bf -dp -hr -las -pca -RC -RD -rmte -si -tlo -A 64 -isf 104 -lu 8 -rt 0.16
        -hrf 0.18 -ihf 40 -sdp 6 -sdpms 128 -shci 65 -si -sidf 45 -omullX" used for
   429.mcf
options "-q -O3 -A 32 -omullX" used for
```

Continued on next page

General Notes (Continued)

```
      445.gobmk
   options "-bf -dp -lro -nop -RC -RD -tb -tlo -vro -A 4
            -isf 88 -lu 8 -hrf 0.10 -sdp 4 -lun 27 -omullX" used for
      462.libquantum
   options "-O4 -omullX -see 1" used for
      473.astar
   options "-O4" used for
      464.h264ref
   Whenever option "-omullX" was used during the optimization phase,
      option "-imullX" was also used during the instrumentation phase.

Benchmarks bound to a processor using numactl on the submit command.
See flags file for details on settings.
```

Base Compiler Invocation

C benchmarks:
```
xlc -qlanglvl=extc99
```

C++ benchmarks:
```
xlC
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_PPC`
462.libquantum: `-DSPEC_CPU_LINUX`
464.h264ref: `-qchars=signed`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-O5 -qalias=noansi -qalloca -lhugetlbfs
```

C++ benchmarks:
```
-O5 -qrtti -lsmartheap
```

Base Other Flags

C benchmarks:
```
-qipa=noobject -qipa=threads
```

C++ benchmarks:
```
-qipa=noobject -qipa=threads
```

Peak Compiler Invocation

C benchmarks:
`xlc -qlanglvl=extc99`

C++ benchmarks:
`xlC`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_PPC`
462.libquantum: `-DSPEC_CPU_LINUX`
464.h264ref: `-qchars=signed`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-Wl,-q -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O4 -qalias=noansi -lsmartheap`

401.bzip2: `-Wl,-q -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O3 -qarch=auto -qtune=auto -lhugetlbfs`

403.gcc: `-Wl,-q -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O4 -qalloca -lhugetlbfs`

429.mcf: `-Wl,-q -O5 -qnoenablevmx -lhugetlbfs`

445.gobmk: `-Wl,-q -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O4 -qnoenablevmx -lhugetlbfs`

456.hmmer: `-Wl,-q -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -lhugetlbfs`

458.sjeng: `-Wl,-q -O5 -lhugetlbfs`

462.libquantum: `-Wl,-q -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -qnoenablevmx -q64 -lhugetlbfs`

464.h264ref: `Same as 456.hmmer`

C++ benchmarks:

471.omnetpp: `-qpdf1`(pass 1) `-qpdf2`(pass 2) `-O4 -qrtti -lsmartheap`

473.astar: `-Wl,-q -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O4 -qnoenablevmx -lsmartheap`

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `-Wl,-q -O5 -lsmartheap`

Peak Other Flags

C benchmarks:
`-qipa=noobject -qipa=threads`

C++ benchmarks:
`-qipa=noobject -qipa=threads`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100302.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:46:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 March 2010.