SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte GA-X58A-UD7 motherboard (Intel Core i7-920)

SPECint®2006 = 29.5

SPECint_base2006 = 28.2

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Feb-2010
Hardware Availability: Nov-2009
Software Availability: Oct-2009

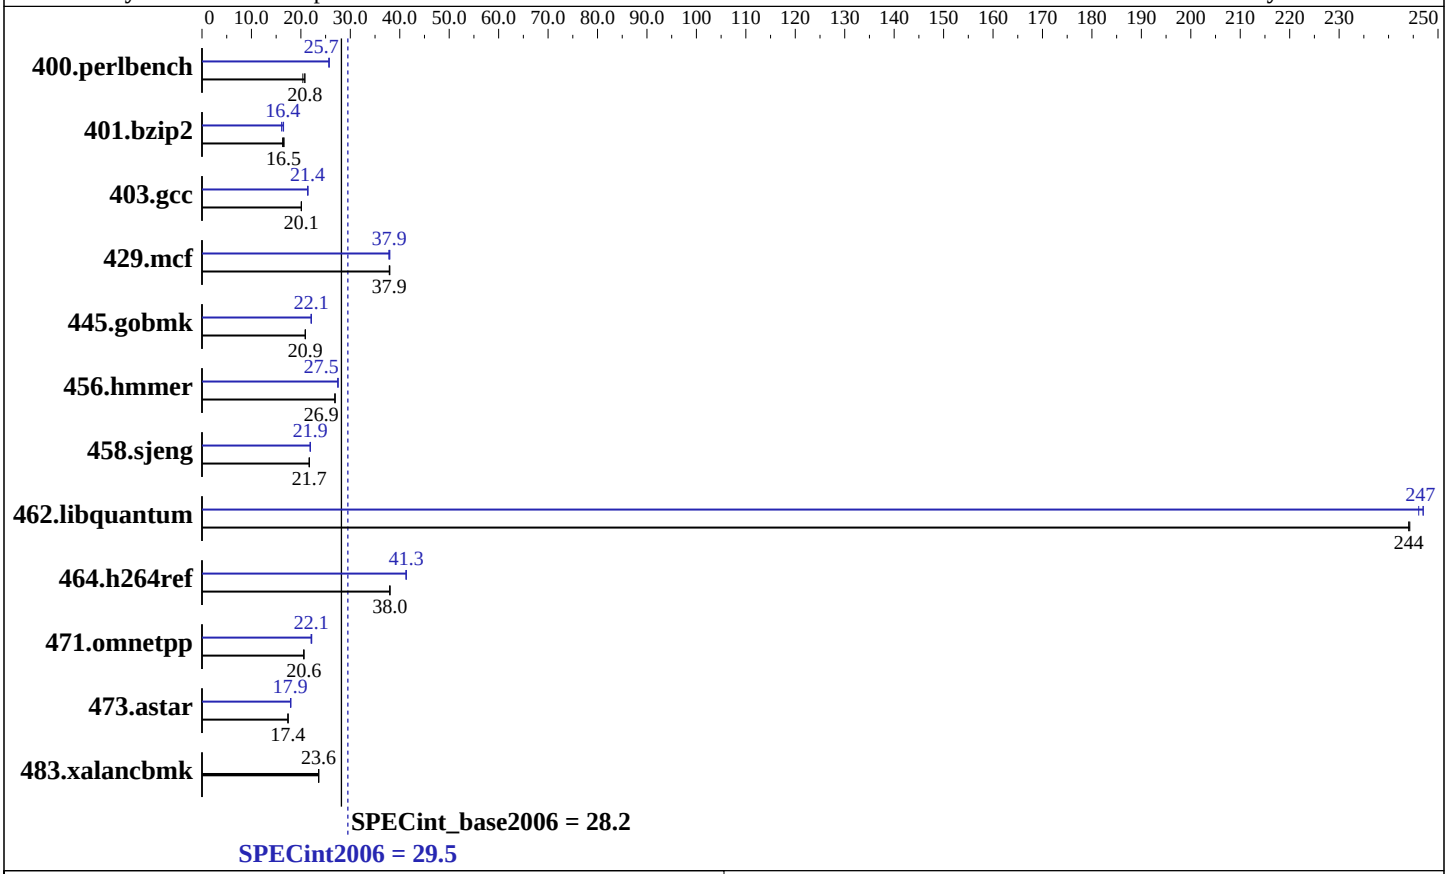

Hardware

CPU Name:	Intel Core i7-920
CPU Characteristics:	Intel Turbo Boost Technology up to 2.93 GHz
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	12 GB (6x2GB Micron 16JTF25664AY-1G1D1 DDR3-1066 CL7)
Disk Subsystem:	Intel X25-M 80GB SSD
Other Hardware:	None

Software

Operating System:	Windows Vista Ultimate w/ SP1 (64-bit)
Compiler:	Intel C++ Compiler Professional 11.1 for Intel 64 Build 20090903 Package ID: w_cproc_p_11.1.045 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other Software:	None SmartHeap Library Version 8.1 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.
(Test Sponsor: Intel Corporation)
Gigabyte GA-X58A-UD7 motherboard (Intel Core i7-920)

SPECint2006 = 29.5

SPECint_base2006 = 28.2

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Feb-2010
Hardware Availability: Nov-2009
Software Availability: Oct-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	478	20.4	470	20.8	**470**	**20.8**	380	25.7	**380**	**25.7**	380	25.7
401.bzip2	592	16.3	**585**	**16.5**	582	16.6	**587**	**16.4**	599	16.1	584	16.5
403.gcc	400	20.1	**400**	**20.1**	400	20.1	376	21.4	**376**	**21.4**	377	21.4
429.mcf	**241**	**37.9**	241	37.9	240	38.0	**241**	**37.9**	241	37.8	240	38.0
445.gobmk	501	20.9	501	20.9	**501**	**20.9**	474	22.1	**474**	**22.1**	474	22.1
456.hmmer	347	26.9	346	26.9	**346**	**26.9**	340	27.5	**340**	**27.5**	340	27.5
458.sjeng	558	21.7	**559**	**21.7**	559	21.7	553	21.9	553	21.9	**553**	**21.9**
462.libquantum	84.8	244	**84.9**	**244**	84.9	244	83.9	247	**83.9**	**247**	84.2	246
464.h264ref	582	38.0	**582**	**38.0**	582	38.0	536	41.3	**536**	**41.3**	536	41.3
471.omnetpp	304	20.6	**304**	**20.6**	304	20.6	**282**	**22.1**	282	22.2	282	22.1
473.astar	403	17.4	**403**	**17.4**	403	17.4	**391**	**17.9**	391	18.0	391	17.9
483.xalancbmk	293	23.6	**293**	**23.6**	293	23.6	293	23.6	**293**	**23.6**	293	23.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
System was configured with an ATI 5970 discrete graphics card
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc9
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64 -DSPEC_CPU_NO_NEED_VA_COPY`
401.bzip2: `-DSPEC_CPU_P64`
403.gcc: `-DSPEC_CPU_P64 -DSPEC_CPU_WIN64`
429.mcf: `-DSPEC_CPU_P64`
445.gobmk: `-DSPEC_CPU_P64`
456.hmmer: `-DSPEC_CPU_P64`

Continued on next page

Base Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_P64 -DWIN32 -DSPEC_CPU_NO_INTTYPES
471.omnetpp: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -DSPEC_CPU_P64 -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qauto-ilp32 /F512000000

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch -Qauto-ilp32 /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias -Qauto-ilp32 /F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qauto-ilp32 /F512000000

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F512000000

456.hmmer: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qauto-ilp32 /F512000000

458.sjeng: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto-ilp32 /F512000000

462.libquantum: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel -Qpar-schedule-static:32768 -Qansi-alias -Qauto-ilp32 /F512000000

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qauto-ilp32 /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block -Qauto-ilp32 /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

473.astar: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=routine -Qauto-ilp32 /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:46:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 March 2010.