SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Asus P5E3 Pro motherboard (Intel Core 2 Duo E8600)

SPECfp®2006 = 25.4

SPECfp_base2006 = 24.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Feb-2010
Hardware Availability: Jun-2009
Software Availability: Oct-2009

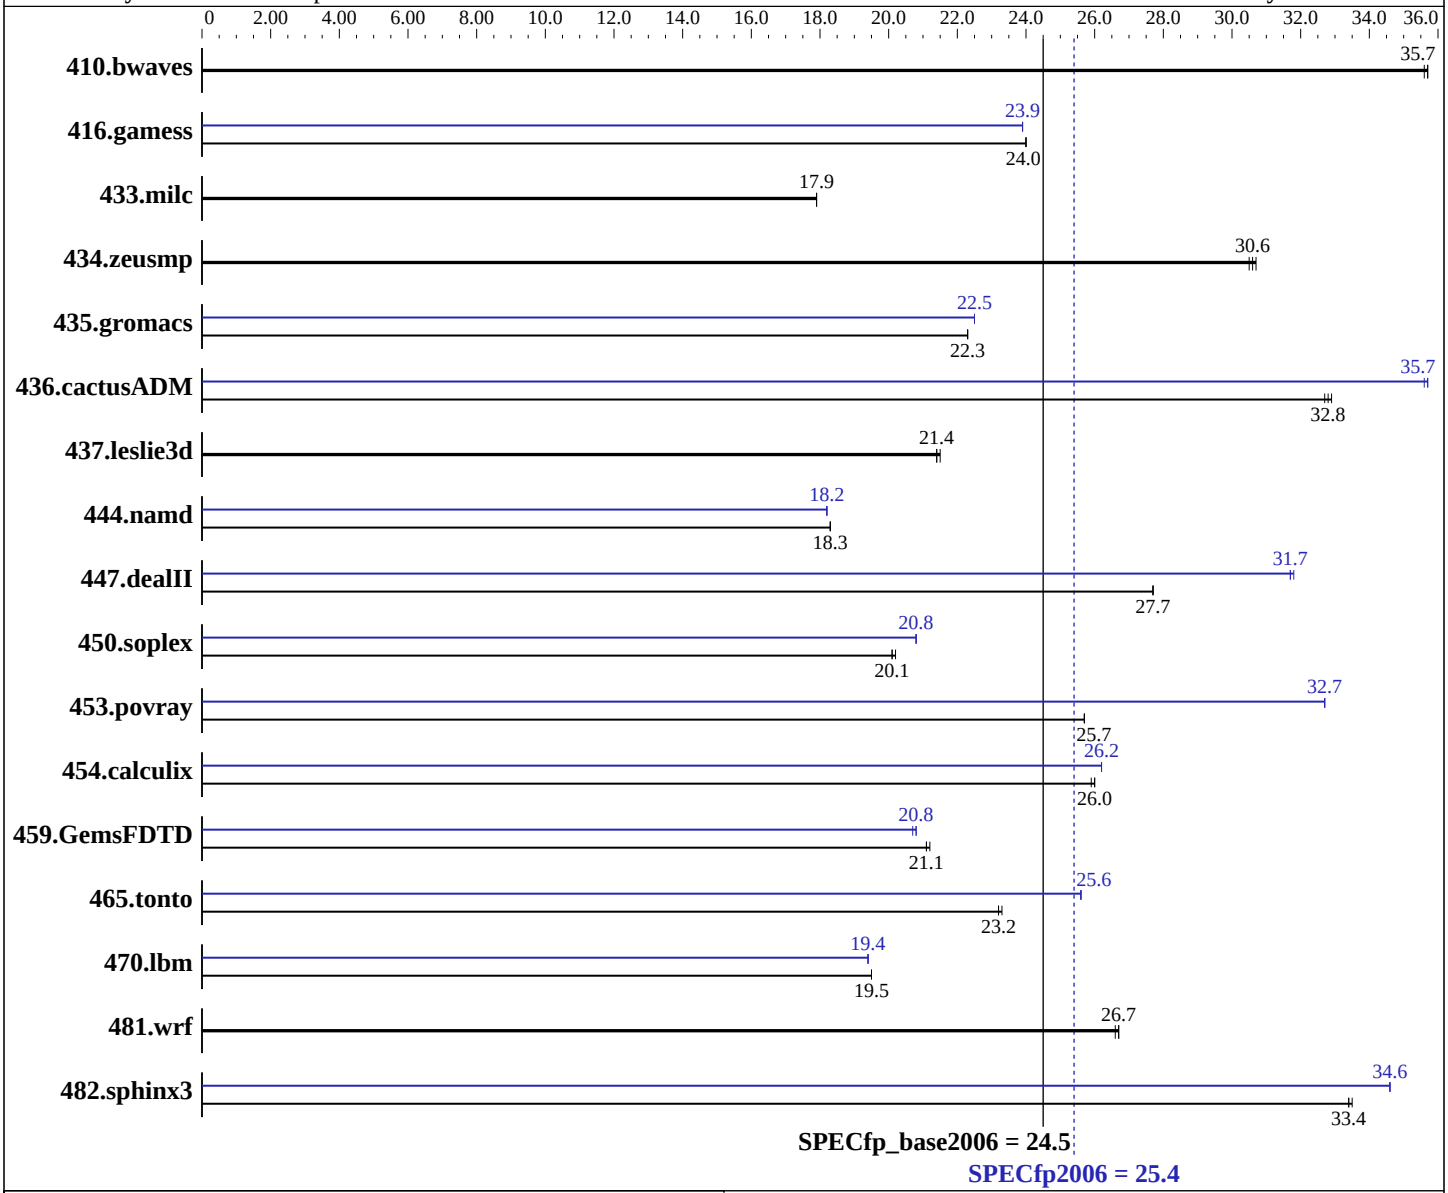

Hardware

CPU Name:	Intel Core 2 Duo E8600
CPU Characteristics:	
CPU MHz:	3333
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip

Continued on next page

Software

Operating System:	Windows Vista Ultimate w/ SP1 (64-bit)
Compiler:	Intel C++ Compiler Professional 11.1 for Intel 64 Build 20090903 Package ID: w_cproc_p_11.1.045 Intel Visual Fortran Compiler Professional 11.1 for Intel 64 Build 20090903 Package ID: w_cproc_p_11.1.045, w_cprof_p_11.1.045 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	Yes

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Asus P5E3 Pro motherboard (Intel Core 2 Duo E8600)

SPECfp2006 = 25.4

SPECfp_base2006 = 24.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Feb-2010
Hardware Availability: Jun-2009
Software Availability: Oct-2009

L3 Cache: None
Other Cache: None
Memory: 4 GB (2x2GB Micron MT16JTF25664AZ-1G4 DDR3-1333 CL9)
Disk Subsystem: Intel X25-M 80GB SSD
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None
SmartHeap Library Version 8.1 from http://www.microquill.com/

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**381**	**35.7**	381	35.7	381	35.6	**381**	**35.7**	381	35.7	381	35.6
416.gamess	**816**	**24.0**	816	24.0	817	24.0	820	23.9	**820**	**23.9**	820	23.9
433.milc	**512**	**17.9**	512	17.9	512	17.9	**512**	**17.9**	512	17.9	512	17.9
434.zeusmp	298	30.5	297	30.7	**298**	**30.6**	298	30.5	297	30.7	**298**	**30.6**
435.gromacs	320	22.3	**320**	**22.3**	320	22.3	318	22.5	**318**	**22.5**	318	22.5
436.cactusADM	365	32.7	364	32.9	**364**	**32.8**	**335**	**35.7**	336	35.6	335	35.7
437.leslie3d	438	21.5	**439**	**21.4**	439	21.4	438	21.5	**439**	**21.4**	439	21.4
444.namd	439	18.3	**439**	**18.3**	439	18.3	440	18.2	**440**	**18.2**	440	18.2
447.dealII	**413**	**27.7**	413	27.7	413	27.7	361	31.7	360	31.8	**360**	**31.7**
450.soplex	**414**	**20.1**	414	20.2	414	20.1	402	20.8	**401**	**20.8**	401	20.8
453.povray	207	25.7	207	25.7	**207**	**25.7**	163	32.7	**163**	**32.7**	163	32.7
454.calculix	318	26.0	**318**	**26.0**	318	25.9	**315**	**26.2**	315	26.2	314	26.2
459.GemsFDTD	501	21.2	**503**	**21.1**	503	21.1	511	20.7	509	20.8	**510**	**20.8**
465.tonto	**424**	**23.2**	424	23.2	423	23.3	385	25.6	**385**	**25.6**	385	25.6
470.lbm	**704**	**19.5**	703	19.5	704	19.5	**708**	**19.4**	708	19.4	709	19.4
481.wrf	**419**	**26.7**	419	26.6	418	26.7	**419**	**26.7**	419	26.6	418	26.7
482.sphinx3	583	33.5	**583**	**33.4**	584	33.4	564	34.6	563	34.6	**563**	**34.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
System was configured with an ATI 5970 discrete graphics card
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 /Qlowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -Qlowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -Qlowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qauto-ilp32 /F1000000000

C++ benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

Benchmarks using both Fortran and C:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qauto-ilp32 /F1000000000

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc9
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc9 -Qstd=c99 ifort
```

Peak Portability Flags

```
Same as Base Portability Flags
```

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `-QxSSE4.1`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qansi-alias -Qparallel -Qauto-ilp32 /F1000000000`

482.sphinx3: `-QxSSE4.1`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll2 -Qauto-ilp32 /F1000000000`

C++ benchmarks:

444.namd: `-QxSSE4.1`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

447.dealII: `-QxSSE4.1`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qansi-alias -Qscalar-rep- -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

450.soplex: `-QxSSE4.1`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

453.povray: `-QxSSE4.1`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel /F1000000000

465.tonto: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000

436.cactusADM: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel -Qunroll2 -Qauto-ilp32 /F1000000000

454.calculix: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qauto-ilp32 /F1000000000

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:45:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 March 2010.