SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710 (Intel Xeon E5530, 2.40 GHz)

SPECint®_rate2006 = 218

SPECint_rate_base2006 = 205

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Feb-2010
Hardware Availability: Mar-2010
Software Availability: Dec-2009

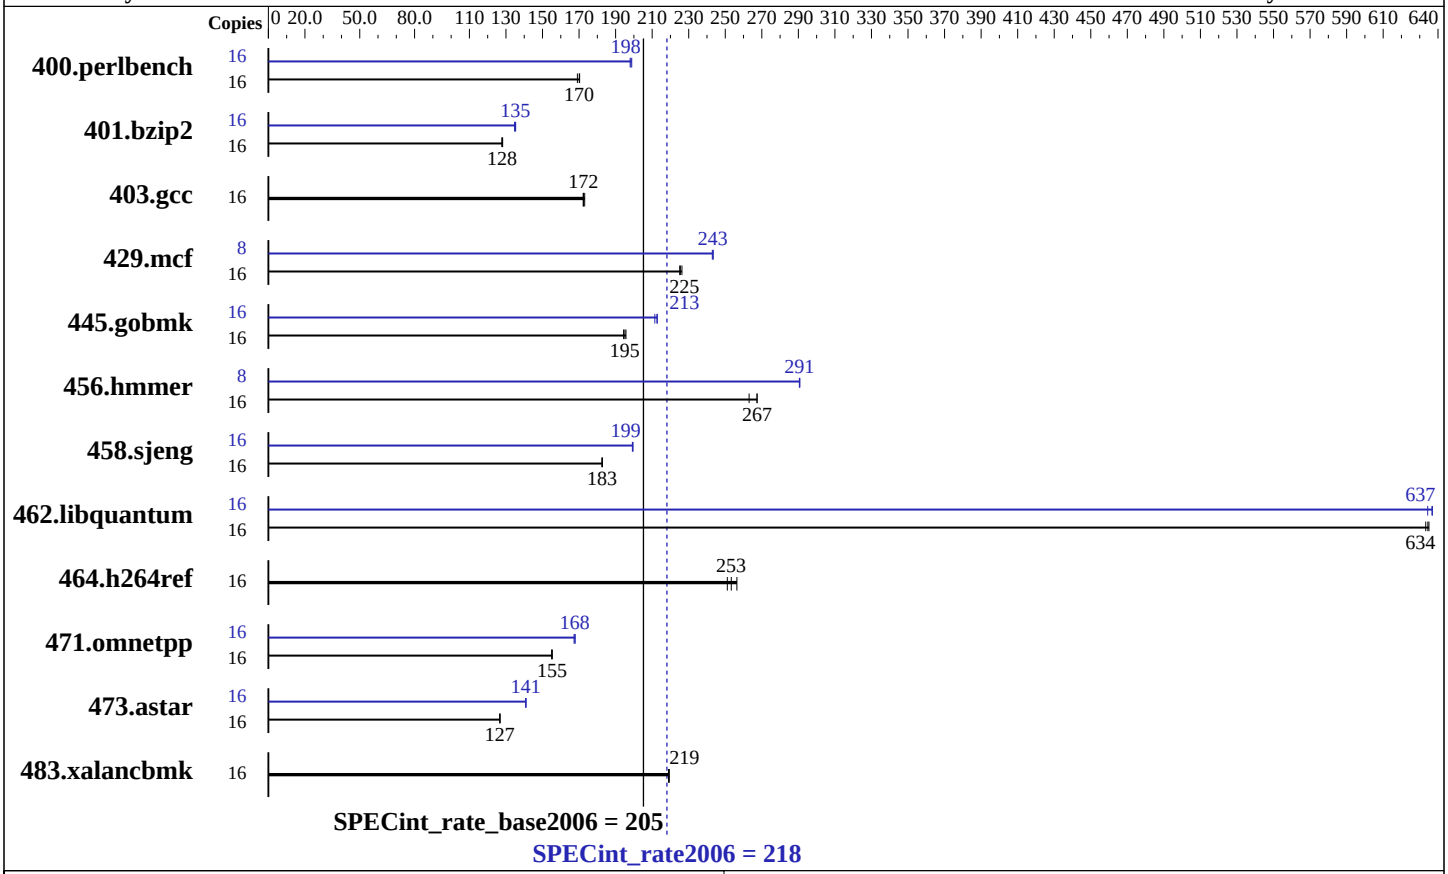

Hardware

CPU Name:	Intel Xeon E5530
CPU Characteristics:	Intel Turbo Boost Technology up to 2.66 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB DDR3-1333 DR RDIMM downclocked to 1066 MHz)
Disk Subsystem:	1 x 146 GB 15000 RPM SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64)
Compiler:	Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710 (Intel Xeon E5530, 2.40 GHz)

SPECint_rate2006 = 218

SPECint_rate_base2006 = 205

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Feb-2010
Hardware Availability: Mar-2010
Software Availability: Dec-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	918	170	925	169	**919**	**170**	16	790	198	**788**	**198**	786	199
401.bzip2	16	1208	128	1204	128	**1207**	**128**	16	**1142**	**135**	1141	135	1146	135
403.gcc	16	744	173	**747**	**172**	748	172	16	744	173	**747**	**172**	748	172
429.mcf	16	648	225	**647**	**225**	645	226	8	**300**	**243**	300	243	300	243
445.gobmk	16	**860**	**195**	858	196	864	194	16	789	213	794	211	**789**	**213**
456.hmmer	16	**558**	**267**	558	267	568	263	8	257	291	257	291	**257**	**291**
458.sjeng	16	1061	183	1059	183	**1060**	**183**	16	**971**	**199**	970	200	972	199
462.libquantum	16	523	633	522	635	**523**	**634**	16	**521**	**637**	523	634	520	637
464.h264ref	16	**1398**	**253**	1410	251	1381	256	16	**1398**	**253**	1410	251	1381	256
471.omnetpp	16	644	155	645	155	**644**	**155**	16	**596**	**168**	596	168	598	167
473.astar	16	887	127	**887**	**127**	886	127	16	798	141	797	141	**797**	**141**
483.xalancbmk	16	**504**	**219**	503	219	504	219	16	**504**	**219**	503	219	504	219

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs`
`-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

462.libquantum: `icc -m64`

C++ benchmarks (except as noted below):
`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-prefetch

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.02.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.02.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 05:45:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 March 2010.