SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DX58SO motherboard (Intel Core i7-980X)

SPECfp®2006 = 40.2

SPECfp_base2006 = 38.4

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Oct-2009

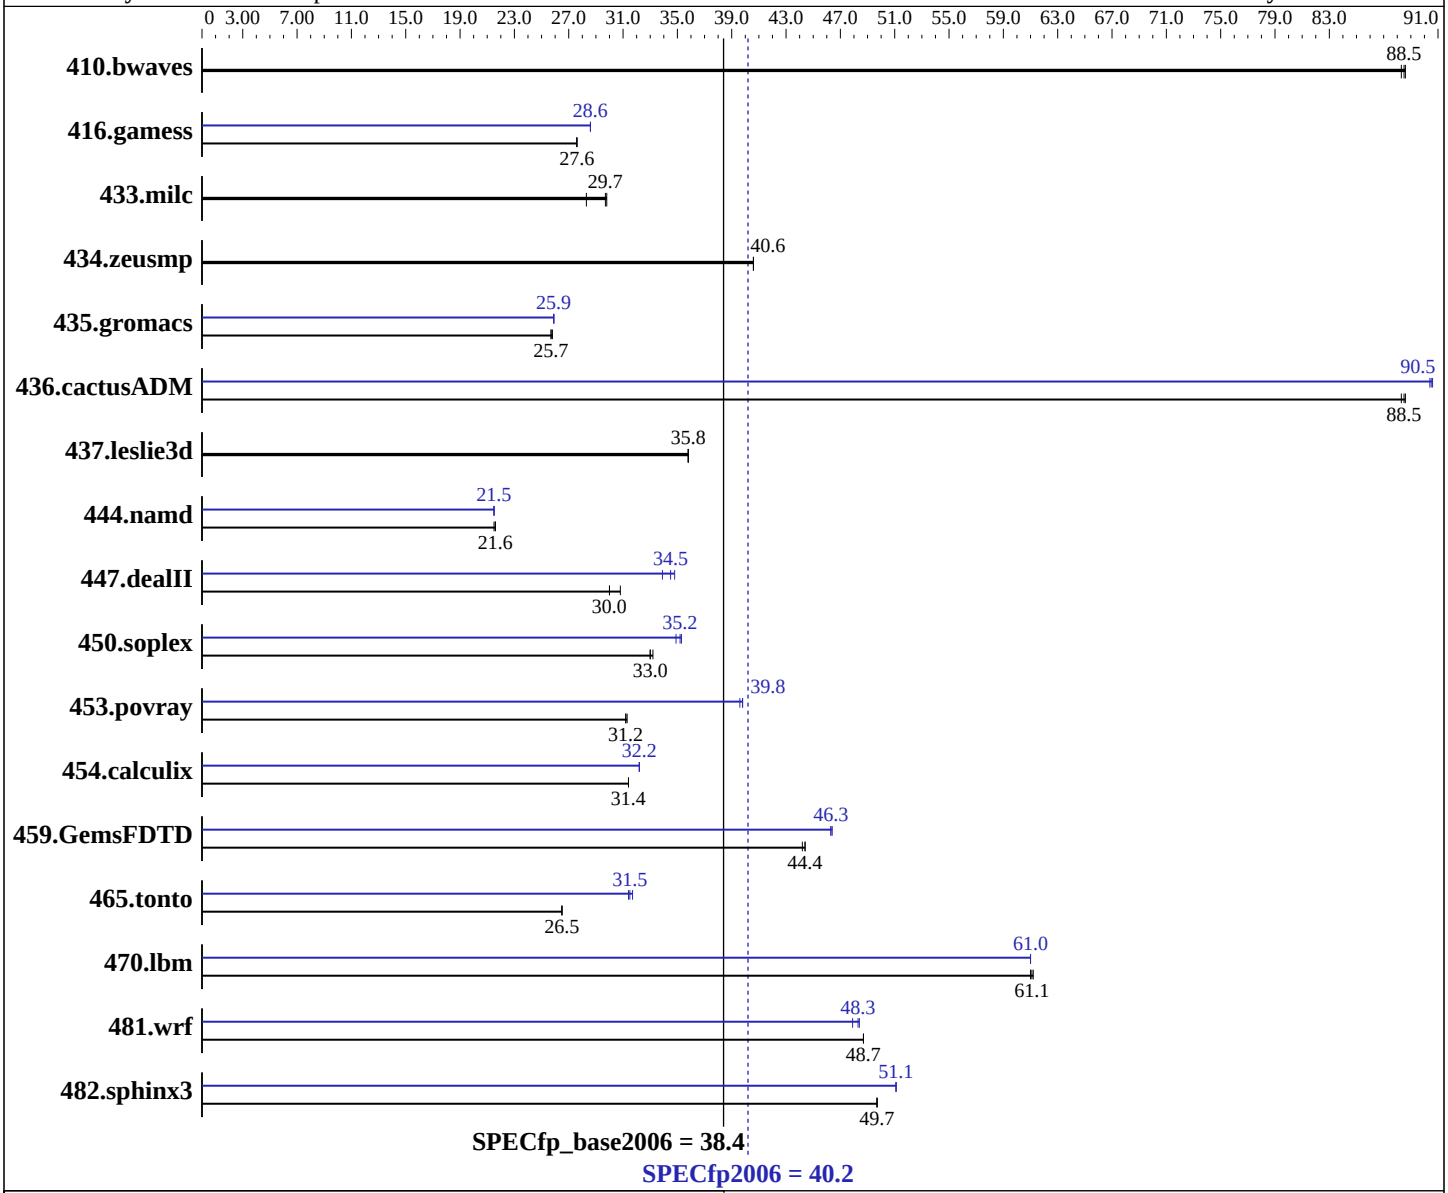

Hardware

CPU Name:	Intel Core i7-980X
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3333
FPU:	Integrated
CPU(s) enabled:	6 cores, 1 chip, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Windows 7 Ultimate (64-bit)
Compiler:	Intel C++ Compiler Professional 11.1 for Intel 64 Build 20090903 Package ID: w_cproc_p_11.1.045 Intel Visual Fortran Compiler Professional 11.1 for Intel 64 Build 20090903 Package ID: w_cproc_p_11.1.045, w_cprof_p_11.1.045 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	Yes

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DX58SO motherboard (Intel Core i7-980X)

SPECfp2006 = 40.2

SPECfp_base2006 = 38.4

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Oct-2009

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 12 GB (3x4GB Samsung M378B5273BH1-CF8 DDR3-1066 CL7)
Disk Subsystem: Intel X25-M 160GB SSD
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None
SmartHeap Library Version 8.1 from http://www.microquill.com/

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	154	88.3	153	88.6	**154**	**88.5**	154	88.3	153	88.6	**154**	**88.5**
416.gamess	708	27.6	**708**	**27.6**	710	27.6	686	28.6	685	28.6	**686**	**28.6**
433.milc	**309**	**29.7**	324	28.3	308	29.8	**309**	**29.7**	324	28.3	308	29.8
434.zeusmp	224	40.6	224	40.6	**224**	**40.6**	224	40.6	224	40.6	**224**	**40.6**
435.gromacs	**278**	**25.7**	278	25.7	277	25.8	**276**	**25.9**	275	25.9	276	25.9
436.cactusADM	135	88.3	135	88.6	**135**	**88.5**	132	90.4	132	90.6	**132**	**90.5**
437.leslie3d	263	35.8	262	35.8	**263**	**35.8**	263	35.8	262	35.8	**263**	**35.8**
444.namd	372	21.6	**372**	**21.6**	372	21.5	373	21.5	373	21.5	**373**	**21.5**
447.dealII	382	30.0	371	30.8	**381**	**30.0**	329	34.8	**332**	**34.5**	337	33.9
450.soplex	253	33.0	**253**	**33.0**	251	33.2	239	34.9	**237**	**35.2**	236	35.3
453.povray	170	31.3	171	31.2	**170**	**31.2**	**134**	**39.8**	134	39.6	134	39.8
454.calculix	263	31.4	**263**	**31.4**	263	31.4	**256**	**32.2**	256	32.2	257	32.2
459.GemsFDTD	**239**	**44.4**	240	44.2	239	44.4	229	46.4	229	46.3	**229**	**46.3**
465.tonto	**371**	**26.5**	371	26.5	371	26.5	**312**	**31.5**	313	31.4	311	31.7
470.lbm	225	61.0	225	61.2	**225**	**61.1**	225	61.0	**225**	**61.0**	225	61.0
481.wrf	229	48.7	**229**	**48.7**	230	48.7	**232**	**48.3**	233	47.9	231	48.4
482.sphinx3	**393**	**49.7**	392	49.7	393	49.7	381	51.1	382	51.1	**381**	**51.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 /Qlowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -Qlowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -Qlowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qauto-ilp32 /F1000000000

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

Benchmarks using both Fortran and C:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qauto-ilp32 /F1000000000

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc9
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc9 -Qstd=c99 ifort
```

Peak Portability Flags

```
Same as Base Portability Flags
```

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qansi-alias -Qparallel -Qauto-ilp32 /F1000000000`

482.sphinx3: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll2 -Qauto-ilp32 /F1000000000`

C++ benchmarks:

444.namd: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

447.dealII: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qansi-alias -Qscalar-rep- -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

450.soplex: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

453.povray: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel /F1000000000

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000

436.cactusADM: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel -Qunroll2 -Qauto-ilp32 /F1000000000

454.calculix: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qauto-ilp32 /F1000000000

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DX58SO motherboard (Intel Core i7-980X)

SPECfp2006 = 40.2

SPECfp_base2006 = 38.4

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Oct-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 05:30:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 March 2010.