




# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX300 S6, Intel Xeon X5667, 3.06 GHz

**SPECint\_rate2006 = 145**

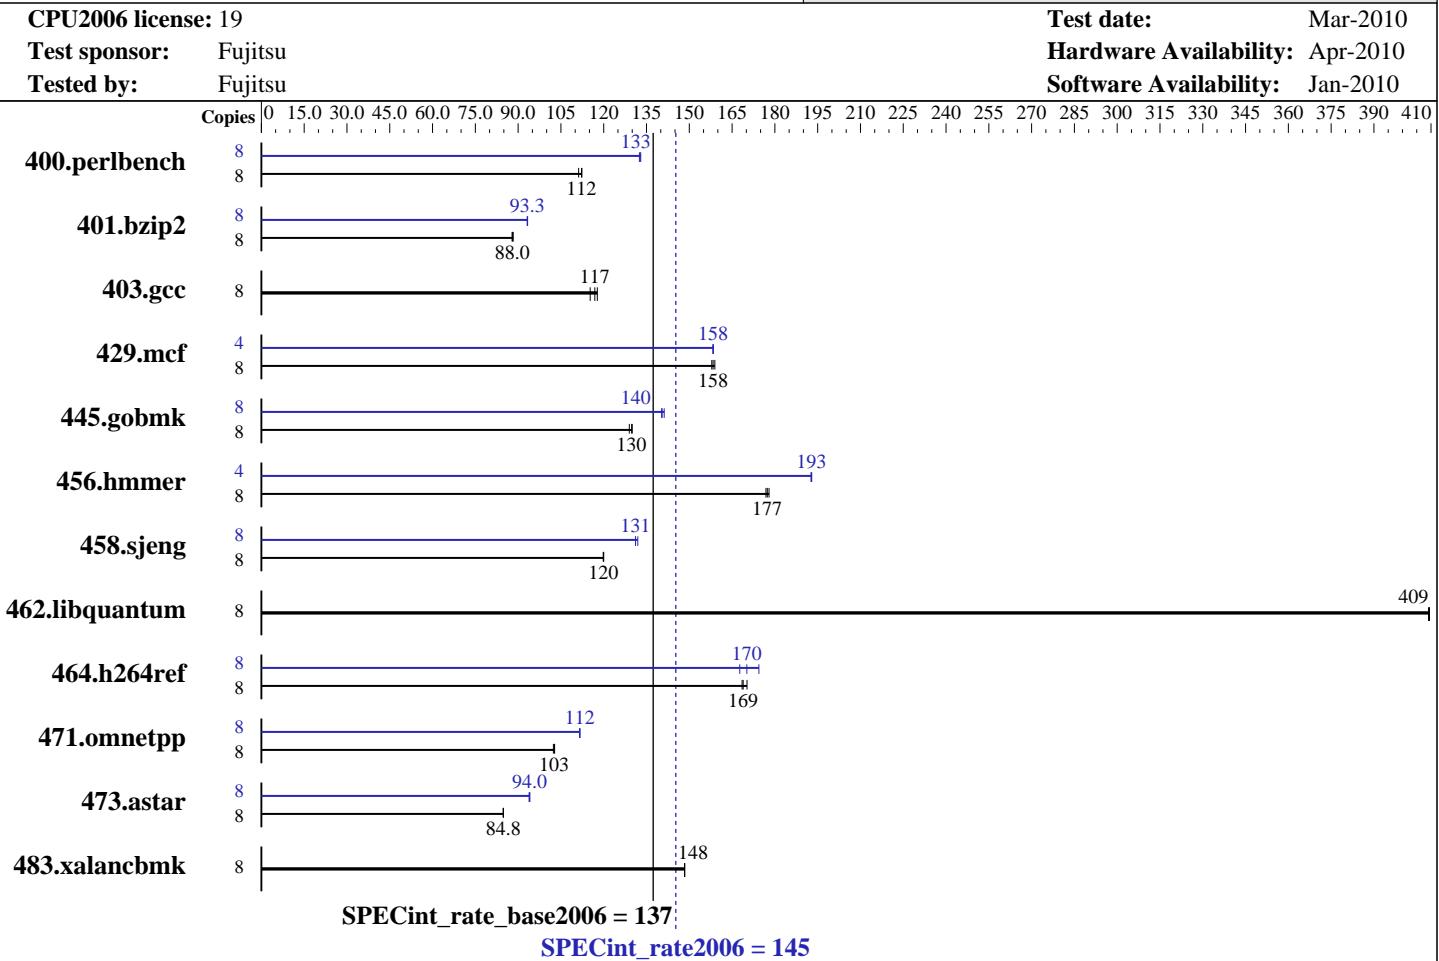

### Hardware

CPU Name: Intel Xeon X5667  
CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz  
CPU MHz: 3067  
FPU: Integrated  
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 24 GB (6x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC)  
Disk Subsystem: 1 x SATA, 250 GB, 5.4 krpm  
Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
Auto Parallel: No  
File System: ext3  
System State: Multi-User Run Level 3  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX300 S6, Intel Xeon X5667, 3.06 GHz

**SPECint\_rate2006 = 145**

CPU2006 license: 19

Test date: Mar-2010

Test sponsor: Fujitsu

Hardware Availability: Apr-2010

Tested by: Fujitsu

Software Availability: Jan-2010

**SPECint\_rate\_base2006 = 137**

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>696</b>	<b>112</b>	703	111	696	112	8	590	133	<b>589</b>	<b>133</b>	588	133
401.bzip2	8	<b>878</b>	<b>88.0</b>	878	87.9	874	88.3	8	827	93.3	829	93.2	<b>828</b>	<b>93.3</b>
403.gcc	8	<b>551</b>	<b>117</b>	547	118	559	115	8	<b>551</b>	<b>117</b>	547	118	559	115
429.mcf	8	<b>461</b>	<b>158</b>	462	158	459	159	4	230	158	230	158	<b>230</b>	<b>158</b>
445.gobmk	8	<b>647</b>	<b>130</b>	646	130	651	129	8	<b>597</b>	<b>140</b>	594	141	598	140
456.hammer	8	<b>421</b>	<b>177</b>	422	177	419	178	4	<b>193</b>	<b>193</b>	194	193	193	193
458.sjeng	8	808	120	807	120	<b>807</b>	<b>120</b>	8	<b>738</b>	<b>131</b>	738	131	734	132
462.libquantum	8	405	409	405	409	<b>405</b>	<b>409</b>	8	405	409	405	409	<b>405</b>	<b>409</b>
464.h264ref	8	<b>1048</b>	<b>169</b>	1040	170	1051	169	8	1056	168	1015	174	<b>1040</b>	<b>170</b>
471.omnetpp	8	486	103	489	102	<b>487</b>	<b>103</b>	8	448	112	<b>448</b>	<b>112</b>	448	112
473.astar	8	<b>662</b>	<b>84.8</b>	662	84.8	662	84.8	8	597	94.1	<b>597</b>	<b>94.0</b>	598	93.8
483.xalancbmk	8	<b>372</b>	<b>148</b>	372	148	372	148	8	<b>372</b>	<b>148</b>	372	148	372	148

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS configuration:  
Data Reuse Optimization = Disable

## General Notes

This result was measured on the PRIMERGY TX300 S6. The PRIMERGY TX300 S6 and the PRIMERGY RX300 S6 are electronically equivalent.

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX300 S6, Intel Xeon X5667, 3.06 GHz

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

**SPECint\_rate2006 = 145**

**SPECint\_rate\_base2006 = 137**

Test date: Mar-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

## Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

401.bzip2: `icc -m64`

456.hmmr: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX300 S6, Intel Xeon X5667, 3.06 GHz

**SPECint\_rate2006 = 145**

CPU2006 license: 19

Test date: Mar-2010

Test sponsor: Fujitsu

Hardware Availability: Apr-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias  
  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32  
  
403.gcc: basepeak = yes  
  
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12  
-ansi-alias -auto-ilp32  
  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll14 -auto-ilp32  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cmpllr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX300 S6, Intel Xeon X5667, 3.06 GHz

**SPECint\_rate2006 = 145**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmpllr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 09:43:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 April 2010.