



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp®2006 = 34.7**

**IBM System x3850 X5 (Intel Xeon E7540)**

**SPECfp\_base2006 = 31.8**

**CPU2006 license:** 11


**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Apr-2010

**Hardware Availability:** Mar-2010

**Software Availability:** Jan-2010

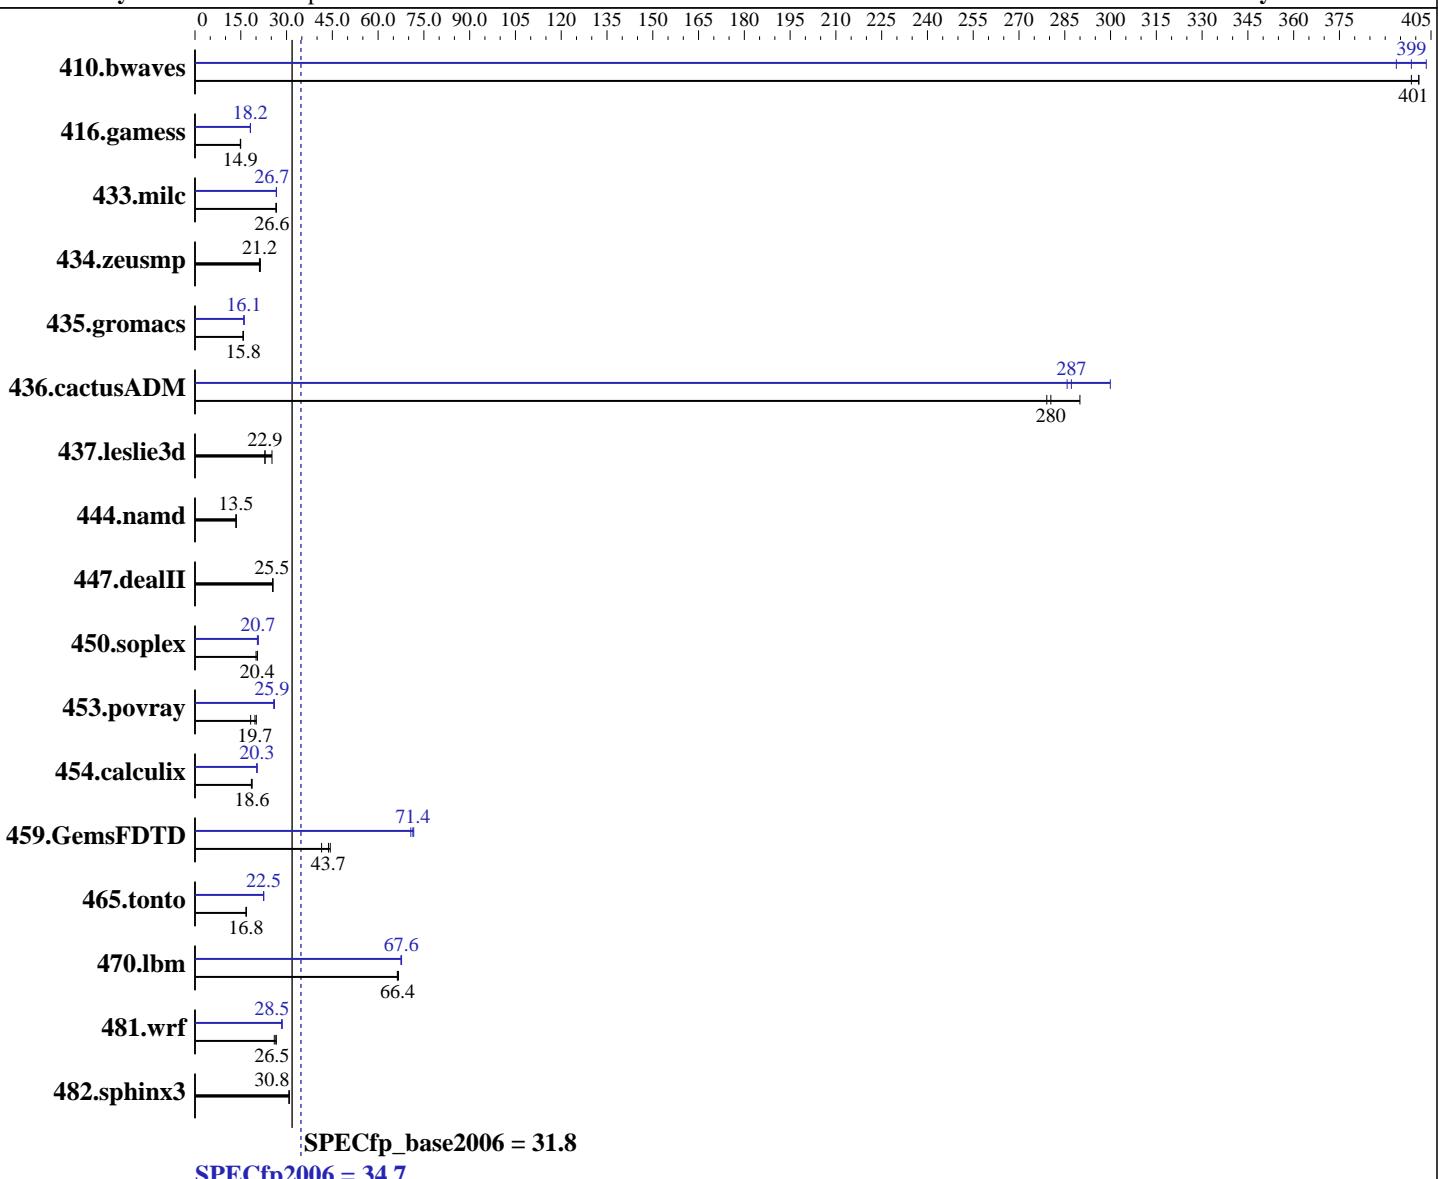

## Hardware

CPU Name: Intel Xeon E7540  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.26 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SuSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp2006 = 34.7**

**IBM System x3850 X5 (Intel Xeon E7540)**

**SPECfp\_base2006 = 31.8**

**CPU2006 license:** 11

**Test date:** Apr-2010

**Test sponsor:** IBM Corporation

**Hardware Availability:** Mar-2010

**Tested by:** IBM Corporation

**Software Availability:** Jan-2010

L3 Cache: 18 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (64 x 4 GB DDR3-1066 QR RDIMM)  
 Disk Subsystem: 3 x 50 GB SATA, SSD  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	34.1	399	33.9	401	<u>33.9</u>	<u>401</u>	33.7	403	34.5	394	<u>34.1</u>	<u>399</u>
416.gamess	1316	14.9	<u>1316</u>	<u>14.9</u>	1307	15.0	<u>1078</u>	<u>18.2</u>	1080	18.1	1077	18.2
433.milc	344	26.7	346	26.6	<u>345</u>	<u>26.6</u>	344	26.7	344	26.6	<u>344</u>	<u>26.7</u>
434.zeusmp	425	21.4	431	21.1	<u>429</u>	<u>21.2</u>	425	21.4	431	21.1	<u>429</u>	<u>21.2</u>
435.gromacs	452	15.8	452	15.8	<u>452</u>	<u>15.8</u>	<u>445</u>	<u>16.1</u>	446	16.0	444	16.1
436.cactusADM	<u>42.6</u>	<u>280</u>	41.2	290	42.8	279	<u>41.6</u>	<u>287</u>	39.8	300	41.8	286
437.leslie3d	373	25.2	<u>410</u>	<u>22.9</u>	410	22.9	373	25.2	<u>410</u>	<u>22.9</u>	410	22.9
444.namd	<u>595</u>	<u>13.5</u>	595	13.5	595	13.5	<u>595</u>	<u>13.5</u>	595	13.5	595	13.5
447.dealII	<u>449</u>	<u>25.5</u>	449	25.5	449	25.5	<u>449</u>	<u>25.5</u>	449	25.5	449	25.5
450.soplex	417	20.0	407	20.5	<u>409</u>	<u>20.4</u>	403	20.7	<u>403</u>	<u>20.7</u>	408	20.4
453.povray	<u>271</u>	<u>19.7</u>	292	18.2	265	20.1	<u>205</u>	<u>25.9</u>	206	25.8	204	26.0
454.calculix	441	18.7	446	18.5	<u>443</u>	<u>18.6</u>	407	20.3	406	20.3	<u>407</u>	<u>20.3</u>
459.GemsFDTD	256	41.5	<u>243</u>	<u>43.7</u>	239	44.3	150	70.7	148	71.7	<u>149</u>	<u>71.4</u>
465.tonto	584	16.9	588	16.7	<u>587</u>	<u>16.8</u>	<u>438</u>	<u>22.5</u>	437	22.5	438	22.5
470.lbm	207	66.3	<u>207</u>	<u>66.4</u>	206	66.7	<u>203</u>	<u>67.6</u>	203	67.7	204	67.5
481.wrf	<u>422</u>	<u>26.5</u>	430	26.0	419	26.6	391	28.5	<u>392</u>	<u>28.5</u>	393	28.5
482.sphinx3	632	30.8	<u>632</u>	<u>30.8</u>	631	30.9	<u>632</u>	<u>30.8</u>	<u>632</u>	<u>30.8</u>	631	30.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

Turbo Boost set to Traditional in BIOS  
 Demand Scrub disabled in BIOS

## General Notes

OMP\_NUM\_THREADS set to number of cores  
 KMP\_AFFINITY set to granularity=fine,scatter  
 KMP\_STACKSIZE set to 200M  
 'ulimit -s unlimited' was used to set the stack size to unlimited prior to run



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 34.7**

IBM System x3850 X5 (Intel Xeon E7540)

**SPECfp\_base2006 = 31.8**

CPU2006 license: 11

Test date: Apr-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 34.7**

IBM System x3850 X5 (Intel Xeon E7540)

**SPECfp\_base2006 = 31.8**

CPU2006 license: 11

**Test date:** Apr-2010

Test sponsor: IBM Corporation

**Hardware Availability:** Mar-2010

Tested by: IBM Corporation

**Software Availability:** Jan-2010

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll14 -ansi-alias

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 34.7**

IBM System x3850 X5 (Intel Xeon E7540)

**SPECfp\_base2006 = 31.8**

CPU2006 license: 11

Test date: Apr-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

410.bwaves: -xsSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.03.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.03.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 34.7**

IBM System x3850 X5 (Intel Xeon E7540)

**SPECfp\_base2006 = 31.8**

**CPU2006 license:** 11

**Test date:** Apr-2010

**Test sponsor:** IBM Corporation

**Hardware Availability:** Mar-2010

**Tested by:** IBM Corporation

**Software Availability:** Jan-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 07:41:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 April 2010.