SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110b-S
(Intel Pentium G6950)

SPECfp®2006 = 26.8

SPECfp_base2006 = 25.7

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Feb-2010
Hardware Availability: Apr-2010
Software Availability: Nov-2009

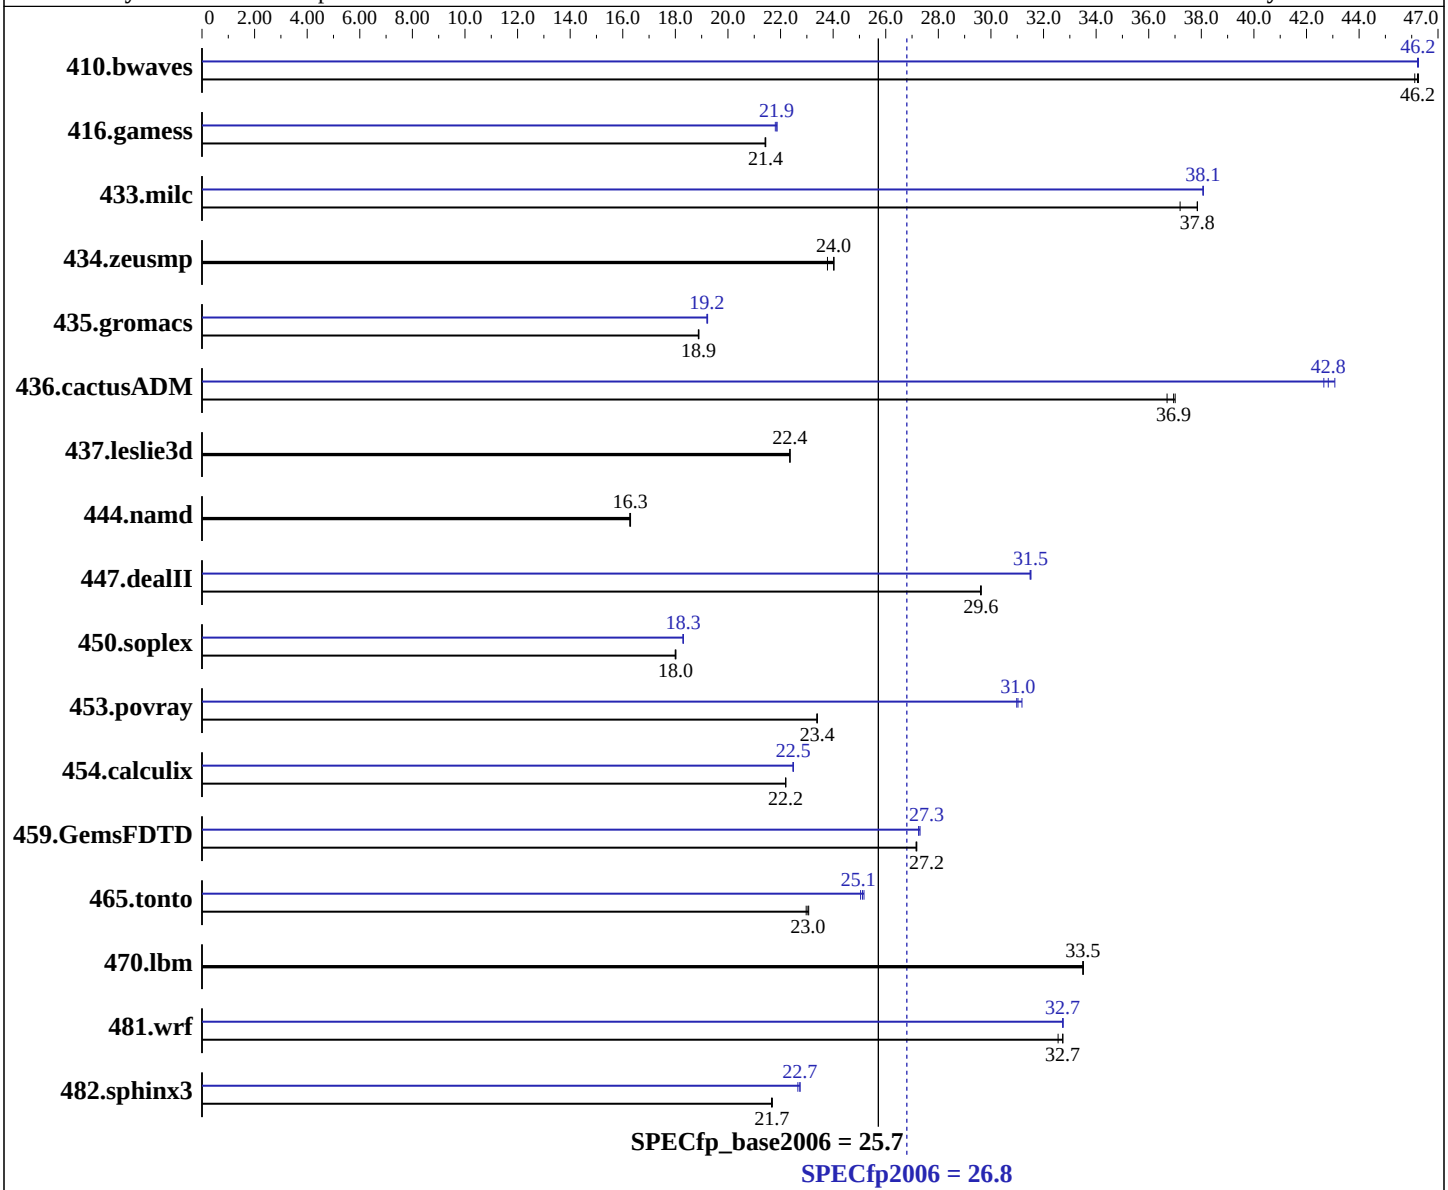

Hardware

CPU Name:	Intel Pentium G6950
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091012 Package ID: l_cproc_p_11.1.059, l_cprof_p_11.1.059
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110b-S
(Intel Pentium G6950)

SPECfp2006 = 26.8

SPECfp_base2006 = 25.7

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Feb-2010
Hardware Availability: Apr-2010
Software Availability: Nov-2009

L3 Cache: 3 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (4 x 2 GB PC3-10600E running at 1066 MHz)
Disk Subsystem: 1x160 GB SATA, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	295	46.1	294	46.3	**294**	**46.2**	**294**	**46.2**	294	46.3	294	46.2
416.gamess	914	21.4	913	21.4	**914**	**21.4**	895	21.9	**896**	**21.9**	898	21.8
433.milc	**243**	**37.8**	247	37.2	243	37.9	241	38.1	241	38.1	**241**	**38.1**
434.zeusmp	383	23.8	379	24.0	**379**	**24.0**	383	23.8	379	24.0	**379**	**24.0**
435.gromacs	378	18.9	378	18.9	**378**	**18.9**	**372**	**19.2**	371	19.2	372	19.2
436.cactusADM	323	37.0	**323**	**36.9**	326	36.7	277	43.1	280	42.7	**279**	**42.8**
437.leslie3d	**420**	**22.4**	420	22.4	420	22.4	**420**	**22.4**	420	22.4	420	22.4
444.namd	492	16.3	**493**	**16.3**	493	16.3	492	16.3	**493**	**16.3**	493	16.3
447.dealII	386	29.6	386	29.6	**386**	**29.6**	**363**	**31.5**	363	31.5	363	31.5
450.soplex	463	18.0	**463**	**18.0**	463	18.0	**456**	**18.3**	456	18.3	456	18.3
453.povray	228	23.4	**227**	**23.4**	227	23.4	**171**	**31.0**	171	31.2	172	31.0
454.calculix	372	22.2	**372**	**22.2**	372	22.2	**367**	**22.5**	367	22.5	367	22.5
459.GemsFDTD	391	27.2	390	27.2	**391**	**27.2**	**389**	**27.3**	389	27.3	389	27.3
465.tonto	427	23.1	**427**	**23.0**	428	23.0	**392**	**25.1**	391	25.2	393	25.0
470.lbm	410	33.5	410	33.5	**410**	**33.5**	410	33.5	410	33.5	**410**	**33.5**
481.wrf	341	32.7	343	32.6	**341**	**32.7**	**341**	**32.7**	341	32.7	341	32.7
482.sphinx3	899	21.7	**899**	**21.7**	900	21.7	**857**	**22.7**	860	22.7	857	22.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

Default BIOS settings were used.

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -fno-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xSSSE3 -ipo -O3 -no-prec-div -static -unroll2`

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSSE3 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel -auto-ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revE.20100302.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revE.20100302.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:52:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 May 2010.