



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5640, 2.67 GHz

SPECfp®2006 = 39.3

SPECfp_base2006 = 36.6

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

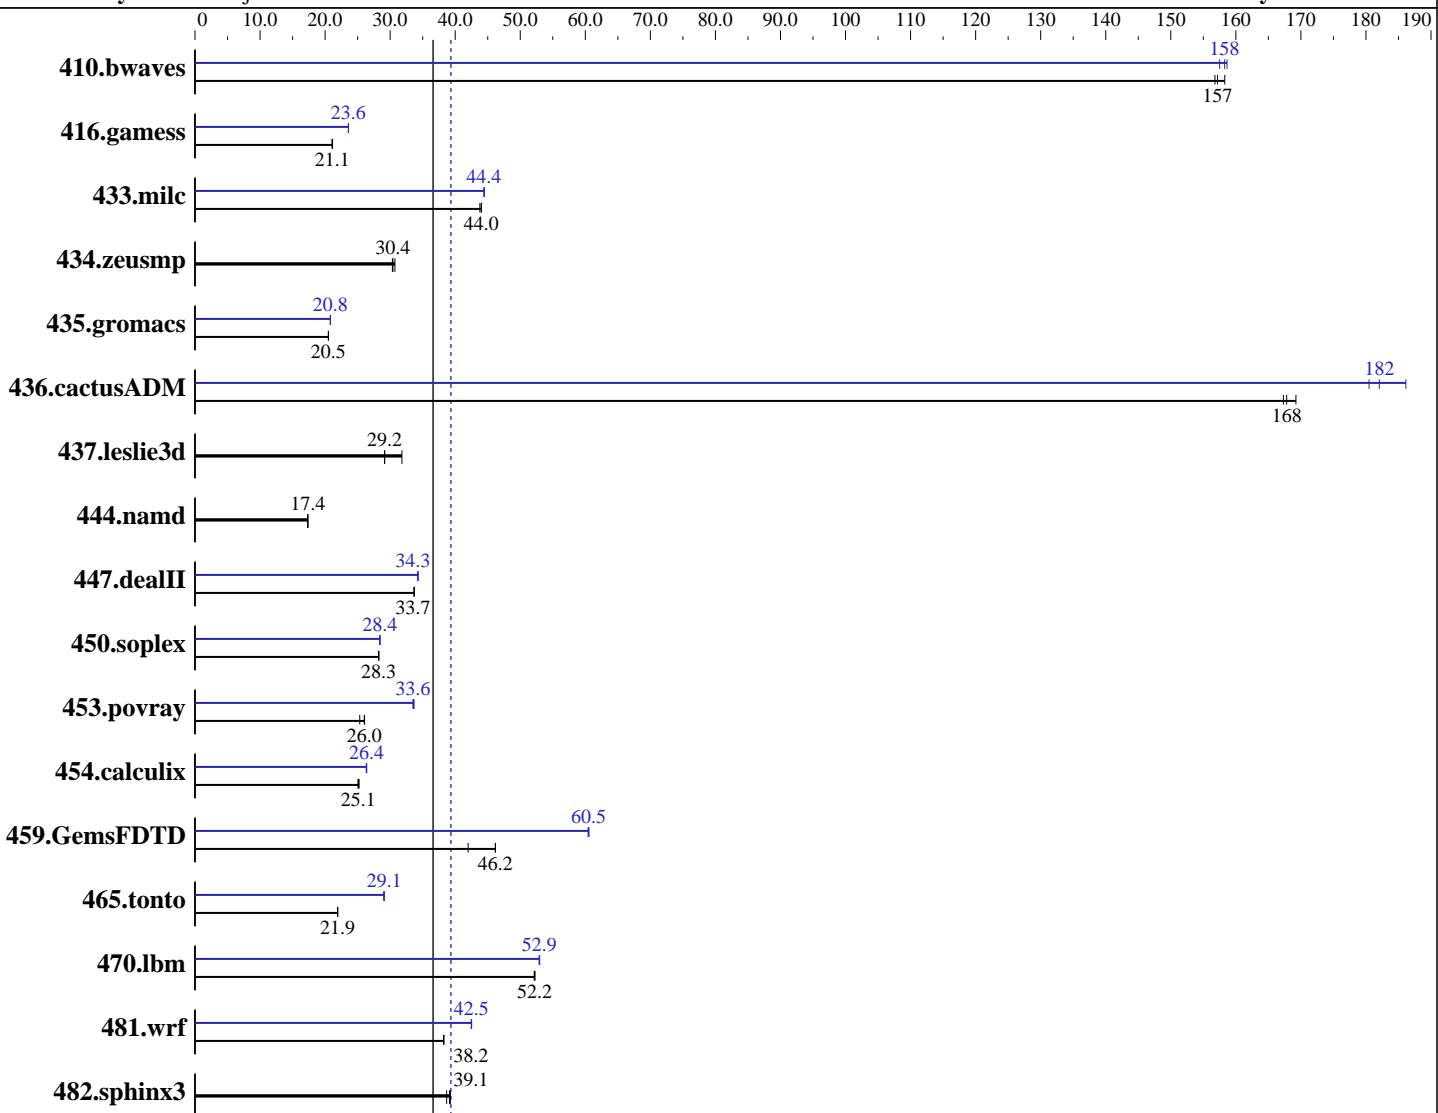

SPECfp_base2006 = 36.6

SPECfp2006 = 39.3

Hardware

CPU Name: Intel Xeon E5640
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User Run Level 3

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5640, 2.67 GHz

SPECfp2006 = 39.3

CPU2006 license: 19	Test date: Apr-2010
Test sponsor: Fujitsu	Hardware Availability: Mar-2010
Tested by: Fujitsu	Software Availability: Jan-2010
L3 Cache: 12 MB I+D on chip per chip	Base Pointers: 64-bit
Other Cache: None	Peak Pointers: 32/64-bit
Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)	Other Software: Binutils 2.18.50.0.7.20080502
Disk Subsystem: 1 x SATA, 160 GB, 5.4 krpm	
Other Hardware: None	

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	86.7	157	85.9	158	<u>86.5</u>	<u>157</u>	85.7	159	86.3	158	<u>85.9</u>	<u>158</u>
416.gamess	<u>929</u>	<u>21.1</u>	926	21.2	929	21.1	830	23.6	<u>830</u>	<u>23.6</u>	830	23.6
433.milc	<u>209</u>	<u>44.0</u>	210	43.8	209	44.0	207	44.4	<u>207</u>	<u>44.4</u>	206	44.5
434.zeusmp	300	30.3	296	30.7	<u>299</u>	<u>30.4</u>	300	30.3	296	30.7	<u>299</u>	<u>30.4</u>
435.gromacs	<u>348</u>	<u>20.5</u>	348	20.5	348	20.5	343	20.8	<u>343</u>	<u>20.8</u>	343	20.8
436.cactusADM	71.4	167	<u>71.2</u>	<u>168</u>	70.6	169	66.2	180	64.2	186	<u>65.6</u>	<u>182</u>
437.leslie3d	323	29.1	296	31.8	<u>322</u>	<u>29.2</u>	323	29.1	296	31.8	<u>322</u>	<u>29.2</u>
444.namd	463	17.3	<u>462</u>	<u>17.4</u>	462	17.4	463	17.3	<u>462</u>	<u>17.4</u>	462	17.4
447.dealII	340	33.7	339	33.7	<u>340</u>	<u>33.7</u>	334	34.3	334	34.2	<u>334</u>	<u>34.3</u>
450.soplex	295	28.3	<u>295</u>	<u>28.3</u>	296	28.2	293	28.4	294	28.4	<u>293</u>	<u>28.4</u>
453.povray	204	26.1	<u>204</u>	<u>26.0</u>	210	25.3	158	33.7	159	33.5	<u>158</u>	<u>33.6</u>
454.calculix	327	25.2	<u>329</u>	<u>25.1</u>	329	25.1	<u>313</u>	<u>26.4</u>	313	26.3	313	26.4
459.GemsFDTD	<u>230</u>	<u>46.2</u>	230	46.2	253	42.0	175	60.6	176	60.4	<u>175</u>	<u>60.5</u>
465.tonto	448	22.0	449	21.9	<u>449</u>	<u>21.9</u>	338	29.1	<u>338</u>	<u>29.1</u>	339	29.0
470.lbm	263	52.1	<u>263</u>	<u>52.2</u>	263	52.3	260	52.9	259	53.0	<u>260</u>	<u>52.9</u>
481.wrf	<u>292</u>	<u>38.2</u>	292	38.3	292	38.2	<u>263</u>	<u>42.5</u>	263	42.5	263	42.5
482.sphinx3	496	39.3	<u>498</u>	<u>39.1</u>	504	38.7	<u>496</u>	<u>39.3</u>	<u>498</u>	<u>39.1</u>	504	38.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 1066 MHz.
BIOS configuration:

Data Reuse Optimization = Disable

Intel HT Technology = Disable

Turbo Boost Technology: Performance/Power Setting = Traditional



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5640, 2.67 GHz

SPECfp2006 = 39.3

CPU2006 license: 19

Test date: Apr-2010

Test sponsor: Fujitsu

Hardware Availability: Mar-2010

Tested by: Fujitsu

Software Availability: Jan-2010

General Notes

OMP_NUM_THREADS set to number of cores

KMP_AFFINITY set to granularity=fine,scatter

KMP_STACKSIZE set to 200M

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5640, 2.67 GHz

SPECfp2006 = 39.3

CPU2006 license: 19

Test date: Apr-2010

Test sponsor: Fujitsu

Hardware Availability: Mar-2010

Tested by: Fujitsu

Software Availability: Jan-2010

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5640, 2.67 GHz

SPECfp2006 = 39.3

CPU2006 license: 19

Test date: Apr-2010

Test sponsor: Fujitsu

Hardware Availability: Mar-2010

Tested by: Fujitsu

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

450.soplex: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

453.povray: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4 .2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsse4 .2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon E5640, 2.67 GHz

SPECfp2006 = 39.3

SPECfp_base2006 = 36.6

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 09:28:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 May 2010.