SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8SIU-F (Intel Pentium G6950, 2.80 GHz)

SPECfp®2006 = 26.4

SPECfp_base2006 = 25.5

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2010
Hardware Availability: Apr-2010
Software Availability: Jan-2010

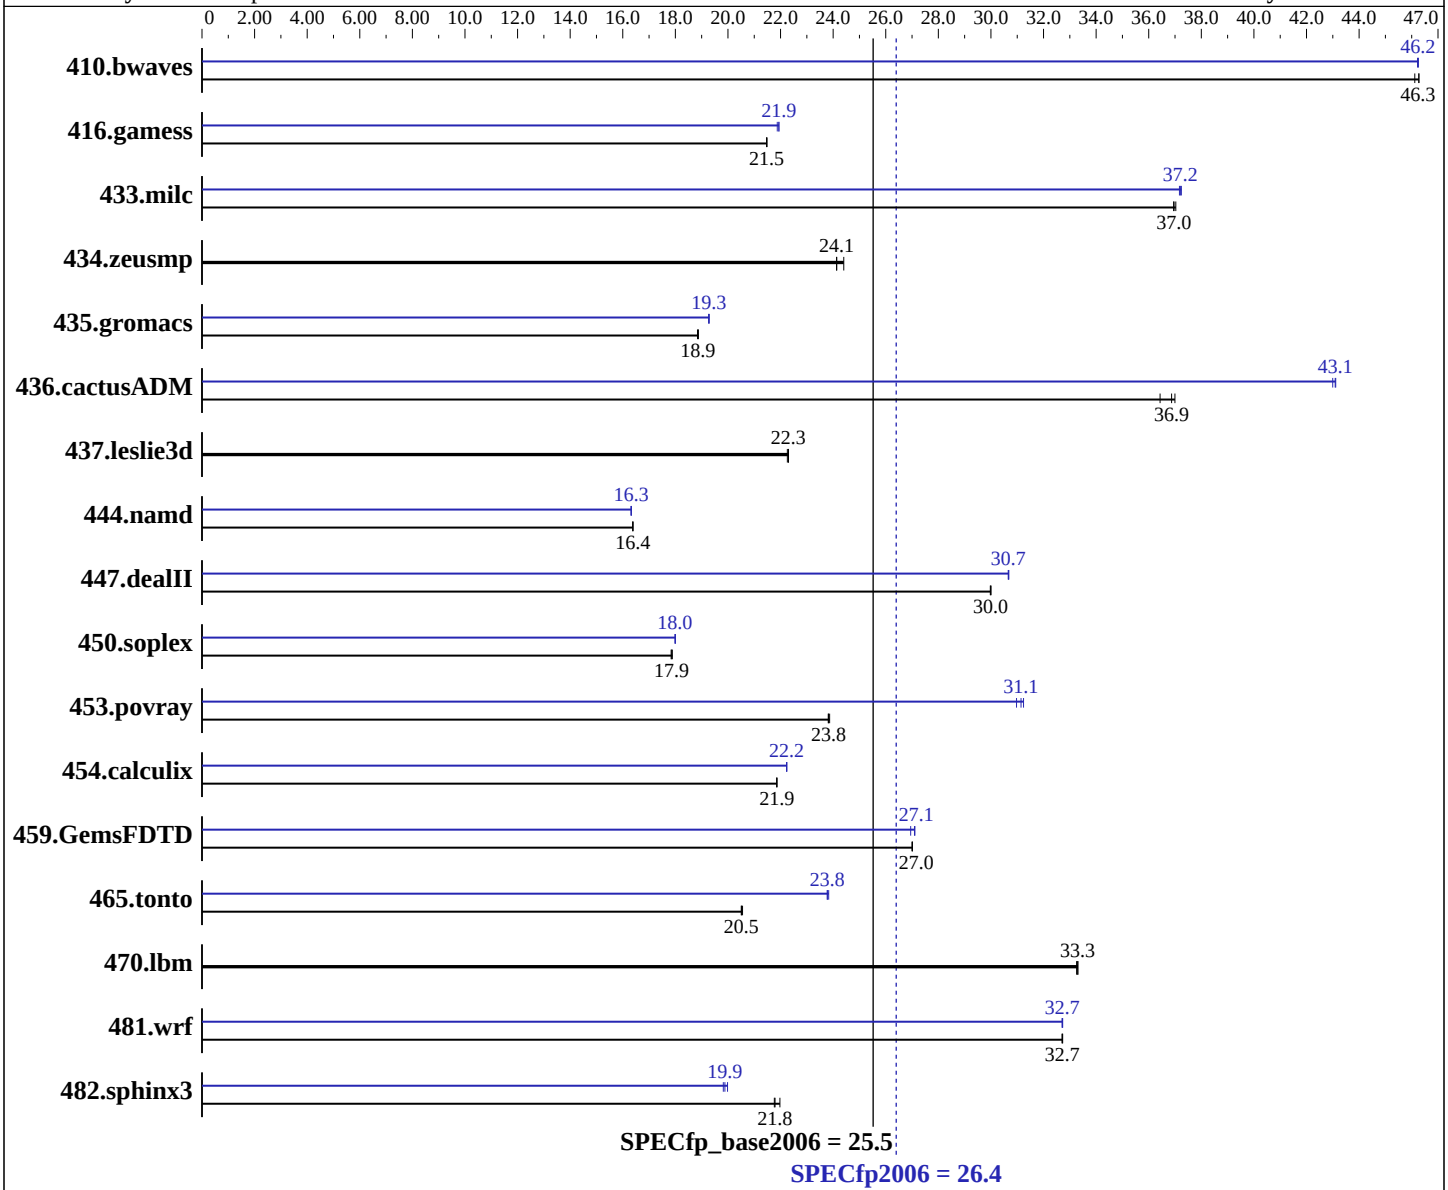

Hardware

CPU Name:	Intel Pentium G6950
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) Kernel 2.6.27.19-5-default
Compiler:	Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8SIU-F (Intel Pentium G6950, 2.80 GHz)

SPECfp2006 = 26.4

SPECfp_base2006 = 25.5

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2010
Hardware Availability: Apr-2010
Software Availability: Jan-2010

L3 Cache: 3 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4 GB 2Rx8 DDR3-1333 UDIMM, ECC, CL9)
Disk Subsystem: 1 x 160 GB SATA II, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	295	46.1	**294**	**46.3**	294	46.3	294	46.3	**294**	**46.2**	294	46.2
416.gamess	912	21.5	**912**	**21.5**	911	21.5	893	21.9	**893**	**21.9**	895	21.9
433.milc	248	36.9	**248**	**37.0**	248	37.0	247	37.2	**247**	**37.2**	247	37.2
434.zeusmp	373	24.4	377	24.1	**377**	**24.1**	373	24.4	377	24.1	**377**	**24.1**
435.gromacs	**378**	**18.9**	378	18.9	379	18.8	370	19.3	**370**	**19.3**	371	19.3
436.cactusADM	323	37.0	**324**	**36.9**	328	36.4	**277**	**43.1**	278	43.0	277	43.1
437.leslie3d	**422**	**22.3**	421	22.3	422	22.3	**422**	**22.3**	421	22.3	422	22.3
444.namd	489	16.4	**489**	**16.4**	490	16.4	**491**	**16.3**	491	16.3	492	16.3
447.dealII	381	30.0	382	30.0	**381**	**30.0**	373	30.7	373	30.7	**373**	**30.7**
450.soplex	466	17.9	468	17.8	**467**	**17.9**	463	18.0	464	18.0	**464**	**18.0**
453.povray	223	23.8	223	23.9	**223**	**23.8**	**171**	**31.1**	170	31.2	172	31.0
454.calculix	377	21.9	**377**	**21.9**	377	21.9	371	22.2	**371**	**22.2**	371	22.2
459.GemsFDTD	393	27.0	393	27.0	**393**	**27.0**	394	26.9	**392**	**27.1**	391	27.1
465.tonto	479	20.6	**480**	**20.5**	480	20.5	413	23.8	**414**	**23.8**	414	23.8
470.lbm	**413**	**33.3**	413	33.3	413	33.3	**413**	**33.3**	413	33.3	413	33.3
481.wrf	**341**	**32.7**	341	32.7	342	32.7	**341**	**32.7**	341	32.7	342	32.7
482.sphinx3	896	21.8	**894**	**21.8**	887	22.0	983	19.8	975	20.0	**980**	**19.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
```

Platform Notes

```
Fan speed set to Full Speed in BIOS Setup.
As tested, the system used a Supermicro CSE-815TQ-330UB chassis.
The chassis is bundled with a PWS-333-1H20 power supply, a SNK-P0046P heatsink,
and 4 FAN-0086L4 cooling fans.
```

General Notes

```
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
       470.lbm: -DSPEC_CPU_LP64
       481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

C++ benchmarks:
```
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Fortran benchmarks:
```
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -fno-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xSSSE3 -ipo -O3 -no-prec-div -static -auto-ilp32 -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep- -opt-prefetch`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `basepeak = yes`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch -parallel`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSSE3 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `-xSSSE3 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100915.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100915.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:12:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 September 2010.