SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R910 (Intel Xeon L7555, 1.87 GHz)

SPECfp®2006 = 37.9

SPECfp_base2006 = 35.0

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2010
Hardware Availability: Mar-2010
Software Availability: Dec-2009

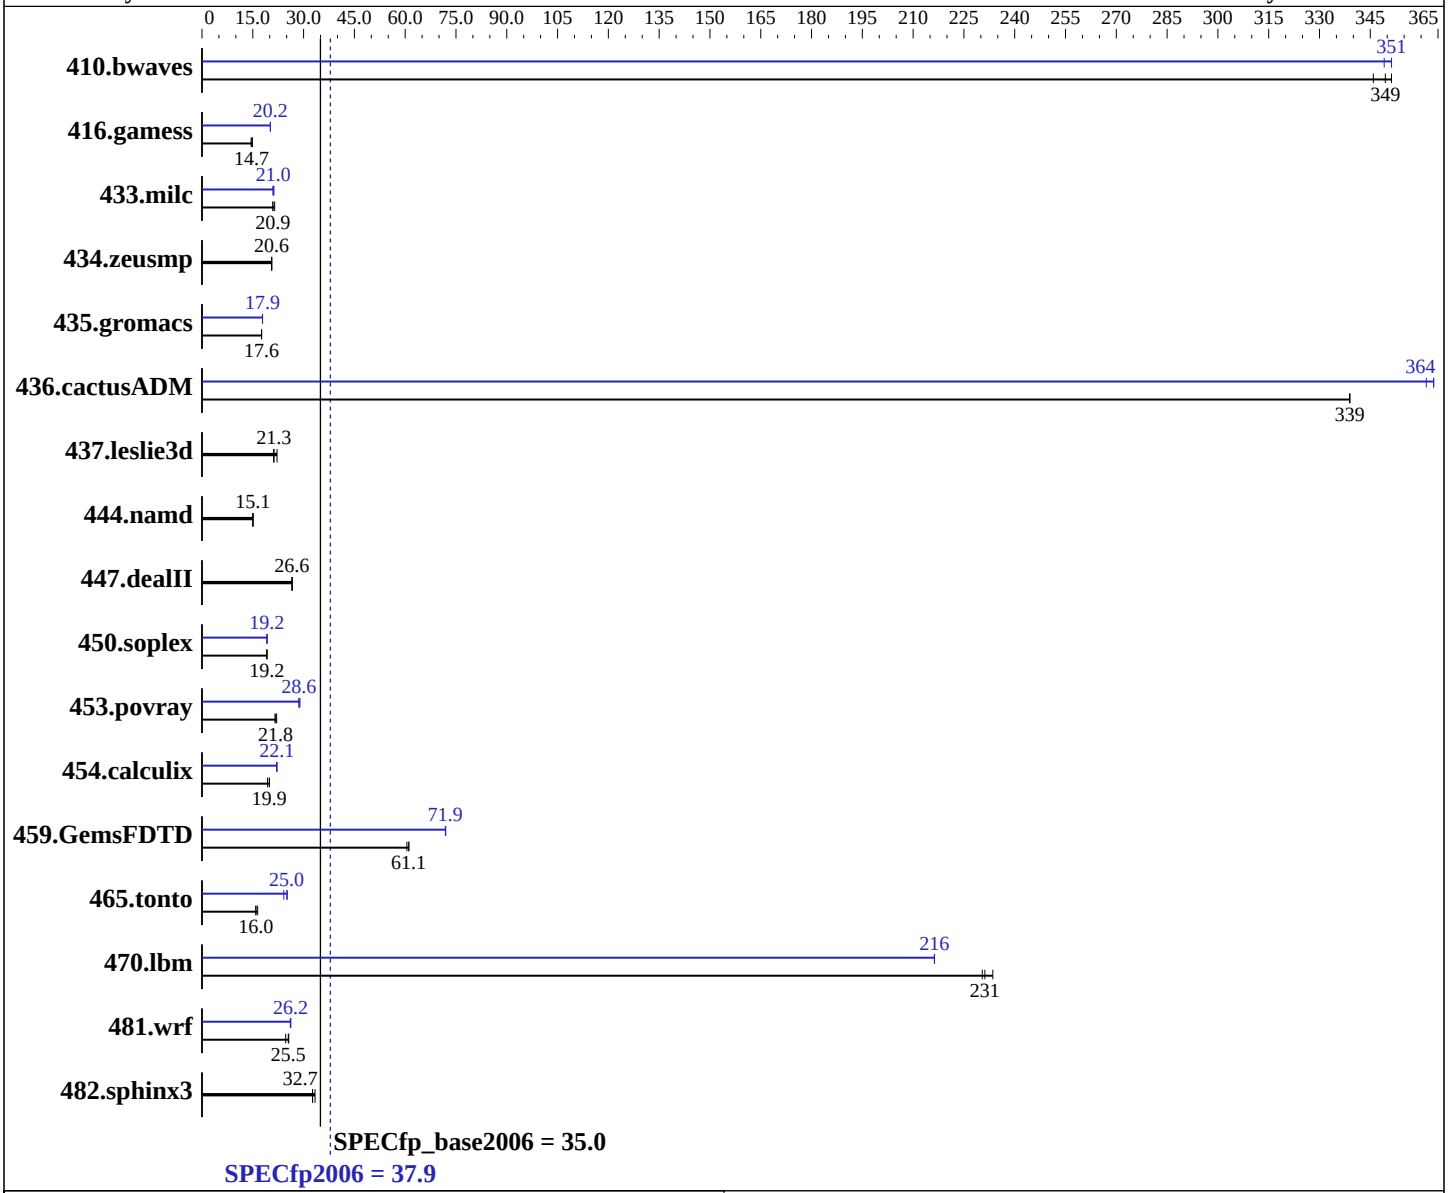

Hardware

CPU Name:	Intel Xeon L7555
CPU Characteristics:	Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz:	1867
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64), kernel-2.6.27.19-5-default
Compiler:	Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R910 (Intel Xeon L7555, 1.87 GHz)

SPECfp2006 = 37.9

SPECfp_base2006 = 35.0

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2010
Hardware Availability: Mar-2010
Software Availability: Dec-2009

L3 Cache: 24 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (64 x 4 GB DDR3-1066 QR RDIMM, CL7, ECC, downclocked to 978 MHz)
Disk Subsystem: 1 x 300 GB 10000 RPM SAS 6Gb
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	39.3	346	**38.9**	**349**	38.7	351	38.7	351	**38.7**	**351**	38.9	349
416.gamess	1316	14.9	**1331**	**14.7**	1349	14.5	968	20.2	971	20.2	**968**	**20.2**
433.milc	428	21.5	**438**	**20.9**	439	20.9	432	21.3	438	21.0	**436**	**21.0**
434.zeusmp	**443**	**20.6**	443	20.5	441	20.6	**443**	**20.6**	443	20.5	441	20.6
435.gromacs	406	17.6	406	17.6	**406**	**17.6**	399	17.9	**400**	**17.9**	400	17.8
436.cactusADM	**35.3**	**339**	35.3	339	35.3	339	32.9	364	**32.9**	**364**	33.1	362
437.leslie3d	**442**	**21.3**	444	21.2	424	22.2	**442**	**21.3**	444	21.2	424	22.2
444.namd	**533**	**15.1**	533	15.0	533	15.1	**533**	**15.1**	533	15.0	533	15.1
447.dealII	430	26.6	**430**	**26.6**	430	26.6	430	26.6	**430**	**26.6**	430	26.6
450.soplex	436	19.1	435	19.2	**435**	**19.2**	**435**	**19.2**	433	19.3	435	19.2
453.povray	**244**	**21.8**	241	22.0	247	21.5	184	28.9	**186**	**28.6**	186	28.6
454.calculix	**415**	**19.9**	415	19.9	427	19.3	373	22.1	**373**	**22.1**	374	22.1
459.GemsFDTD	174	61.1	**174**	**61.1**	175	60.5	**148**	**71.9**	148	71.9	147	72.0
465.tonto	**617**	**16.0**	598	16.4	620	15.9	407	24.2	391	25.2	**393**	**25.0**
470.lbm	59.6	230	58.8	234	**59.4**	**231**	63.5	216	63.5	216	**63.5**	**216**
481.wrf	**438**	**25.5**	436	25.6	452	24.7	426	26.2	**426**	**26.2**	428	26.1
482.sphinx3	**597**	**32.7**	584	33.4	597	32.6	**597**	**32.7**	584	33.4	597	32.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
Memory Settings: Node Interleaving = Enabled (Default = Disabled)

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
The Dell PowerEdge R910 and
the Bull NovaScale R480 F2 models are electronically equivalent.

Continued on next page

General Notes (Continued)

The results have been measured on a Dell PowerEdge R910 model.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-ansi-alias`

470.lbm: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-parallel -ansi-alias -auto-ilp32`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `basepeak = yes`

447.dealII: `basepeak = yes`

450.soplex: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-malloc-options=3 -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

453.povray: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel`

416.gamess: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `basepeak = yes`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -opt-prefetch -parallel`

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-inline-calloc -opt-malloc-options=3 -auto -unroll4`

Benchmarks using both Fortran and C:

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `Same as 454.calculix`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:07:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2010.