



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

**SPECfp®\_rate2006 = 241**

PRIMERGY RX200 S6, Intel Xeon X5650, 2.67 GHz

**SPECfp\_rate\_base2006 = 232**

CPU2006 license: 19


Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Oct-2010

Tested by: Fujitsu

Software Availability: Jan-2010

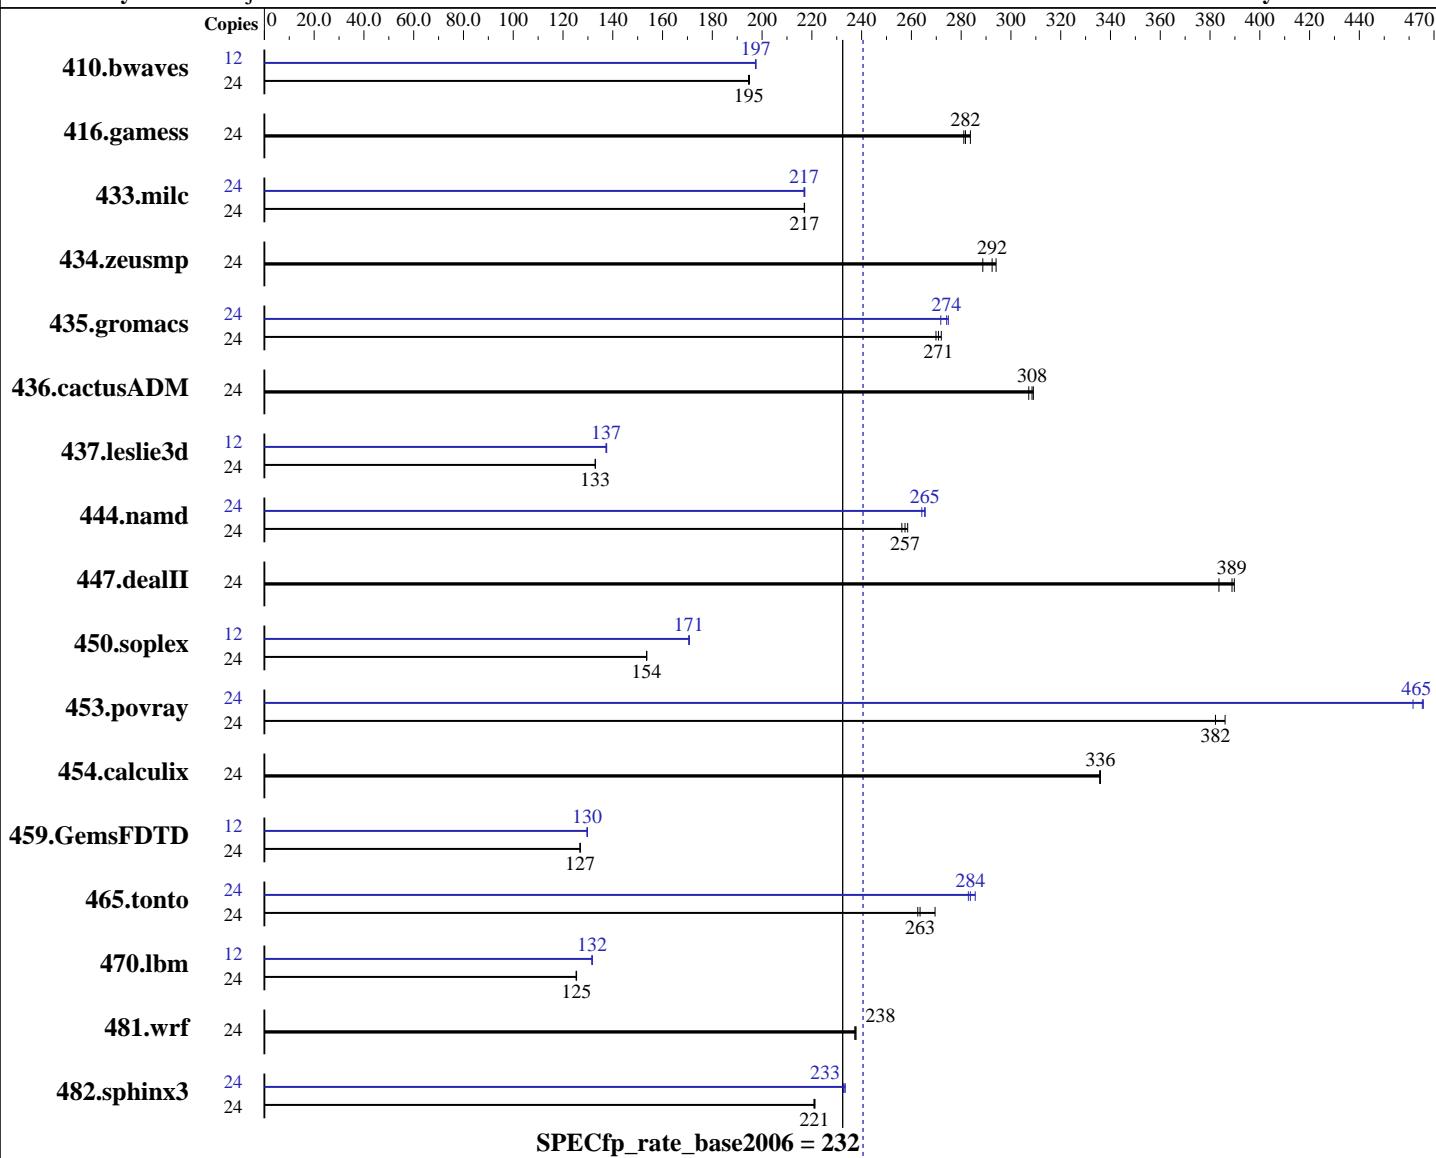

## Hardware

CPU Name: Intel Xeon X5650  
CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz  
CPU MHz: 2667  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
Auto Parallel: No  
File System: ext3  
System State: Multi-User Run Level 3

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECfp\_rate2006 = 241**

PRIMERGY RX200 S6, Intel Xeon X5650, 2.67 GHz

**SPECfp\_rate\_base2006 = 232**

**CPU2006 license:** 19

**Test date:** Jun-2010

**Test sponsor:** Fujitsu

**Hardware Availability:** Oct-2010

**Tested by:** Fujitsu

**Software Availability:** Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC)  
 see add'l detail in notes  
 Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1673	195	<b>1675</b>	<b>195</b>	1677	195	12	<b>826</b>	<b>197</b>	825	198	826	197		
416.gamess	24	1672	281	1656	284	<b>1668</b>	<b>282</b>	24	1672	281	1656	284	<b>1668</b>	<b>282</b>		
433.milc	24	1015	217	<b>1015</b>	<b>217</b>	1015	217	24	1014	217	1016	217	<b>1015</b>	<b>217</b>		
434.zeusmp	24	<b>747</b>	<b>292</b>	743	294	757	289	24	<b>747</b>	<b>292</b>	743	294	757	289		
435.gromacs	24	<b>633</b>	<b>271</b>	635	270	630	272	24	<b>625</b>	<b>274</b>	623	275	630	272		
436.cactusADM	24	<b>930</b>	<b>308</b>	928	309	934	307	24	<b>930</b>	<b>308</b>	928	309	934	307		
437.leslie3d	24	1695	133	<b>1697</b>	<b>133</b>	1697	133	12	<b>821</b>	<b>137</b>	821	137	820	138		
444.namd	24	751	256	745	259	<b>748</b>	<b>257</b>	24	<b>725</b>	<b>265</b>	729	264	725	266		
447.dealII	24	<b>706</b>	<b>389</b>	716	384	704	390	24	<b>706</b>	<b>389</b>	716	384	704	390		
450.soplex	24	<b>1303</b>	<b>154</b>	1303	154	1303	154	12	586	171	587	171	<b>587</b>	<b>171</b>		
453.povray	24	334	382	331	386	<b>334</b>	<b>382</b>	24	<b>274</b>	<b>465</b>	277	462	274	466		
454.calculix	24	<b>589</b>	<b>336</b>	589	336	590	336	24	<b>589</b>	<b>336</b>	589	336	590	336		
459.GemsFDTD	24	<b>2007</b>	<b>127</b>	2006	127	2008	127	12	982	130	<b>982</b>	<b>130</b>	981	130		
465.tonto	24	876	270	<b>896</b>	<b>263</b>	899	263	24	<b>832</b>	<b>284</b>	827	286	835	283		
470.lbm	24	2628	125	<b>2630</b>	<b>125</b>	2632	125	12	1252	132	<b>1252</b>	<b>132</b>	1251	132		
481.wrf	24	1130	237	1128	238	<b>1128</b>	<b>238</b>	24	1130	237	1128	238	<b>1128</b>	<b>238</b>		
482.sphinx3	24	2114	221	<b>2116</b>	<b>221</b>	2118	221	24	2004	233	<b>2008</b>	<b>233</b>	2010	233		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS configuration:  
 Data Reuse Optimization = Disable



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX200 S6, Intel Xeon X5650, 2.67 GHz

**SPECfp\_rate2006 = 241**

CPU2006 license: 19

Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Oct-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX200 S6, Intel Xeon X5650, 2.67 GHz

**SPECfp\_rate2006 = 241**

CPU2006 license: 19

Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Oct-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX200 S6, Intel Xeon X5650, 2.67 GHz

**SPECfp\_rate2006 = 241**

CPU2006 license: 19

Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Oct-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

433.milc: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -fno-alias -opt-prefetch

470.lbm: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xsse4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -opt-malloc-options=3

453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xsse4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll2 -Ob0

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll14 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX200 S6, Intel Xeon X5650, 2.67 GHz

**SPECfp\_rate2006 = 241**

**SPECfp\_rate\_base2006 = 232**

**CPU2006 license:** 19

**Test date:** Jun-2010

**Test sponsor:** Fujitsu

**Hardware Availability:** Oct-2010

**Tested by:** Fujitsu

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 11:02:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 July 2010.