SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX200 S6, Intel Xeon X5667, 3.06 GHz

SPECfp®_rate2006 = 212

SPECfp_rate_base2006 = 205

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: May-2010
Hardware Availability: Oct-2010
Software Availability: Jan-2010

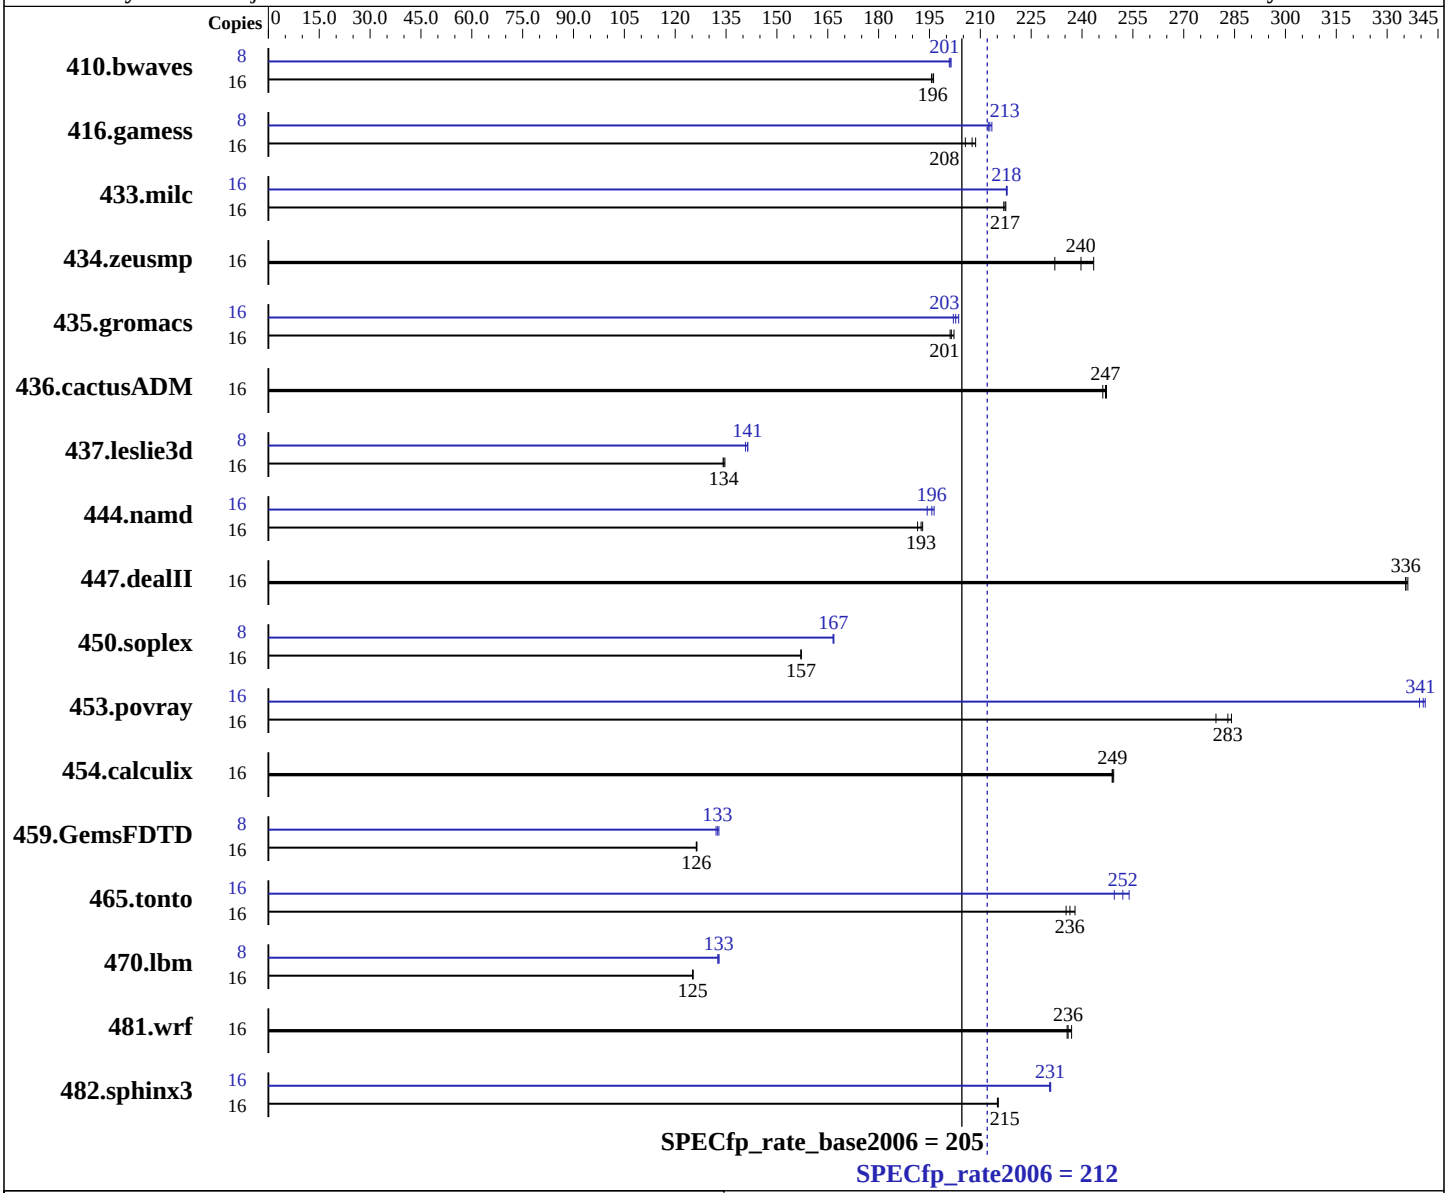

Hardware

CPU Name:	Intel Xeon X5667
CPU Characteristics:	Intel Turbo Boost Technology up to 3.47 GHz
CPU MHz:	3067
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel:	No
File System:	ext3
System State:	Multi-User Run Level 3

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX200 S6, Intel Xeon X5667, 3.06 GHz

SPECfp_rate2006 = 212

SPECfp_rate_base2006 = 205

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: May-2010
Hardware Availability: Oct-2010
Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)
Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	**1109**	**196**	1108	196	1112	196	8	**541**	**201**	540	201	541	201
416.gamess	16	1502	209	**1509**	**208**	1524	206	8	738	212	**736**	**213**	734	213
433.milc	16	675	218	**676**	**217**	677	217	16	675	218	**675**	**218**	674	218
434.zeusmp	16	**607**	**240**	628	232	598	243	16	**607**	**240**	628	232	598	243
435.gromacs	16	**567**	**201**	565	202	568	201	16	561	204	565	202	**563**	**203**
436.cactusADM	16	777	246	773	247	**774**	**247**	16	777	246	773	247	**774**	**247**
437.leslie3d	16	1121	134	1117	135	**1120**	**134**	8	**532**	**141**	532	141	534	141
444.namd	16	**666**	**193**	665	193	670	191	16	660	194	**656**	**196**	653	196
447.dealII	16	546	335	545	336	**546**	**336**	16	546	335	545	336	**546**	**336**
450.soplex	16	849	157	**849**	**157**	849	157	8	**400**	**167**	401	167	400	167
453.povray	16	300	284	**301**	**283**	305	280	16	**250**	**341**	249	341	251	340
454.calculix	16	530	249	529	249	**530**	**249**	16	530	249	529	249	**530**	**249**
459.GemsFDTD	16	1345	126	**1344**	**126**	1343	126	8	**641**	**133**	639	133	643	132
465.tonto	16	662	238	669	235	**666**	**236**	16	631	250	**625**	**252**	620	254
470.lbm	16	1755	125	**1756**	**125**	1756	125	8	**827**	**133**	827	133	829	133
481.wrf	16	759	236	**758**	**236**	754	237	16	759	236	**758**	**236**	754	237
482.sphinx3	16	1450	215	**1449**	**215**	1448	215	16	1351	231	**1352**	**231**	1353	230

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Platform Notes

```
BIOS configuration:
Data Reuse Optimization = Disable
```

General Notes

```
For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
       465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

Fortran benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 11:28:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 July 2010.