SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 M3 (Intel Xeon E5520)

SPECint®_rate2006 = 211

SPECint_rate_base2006 = 199

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

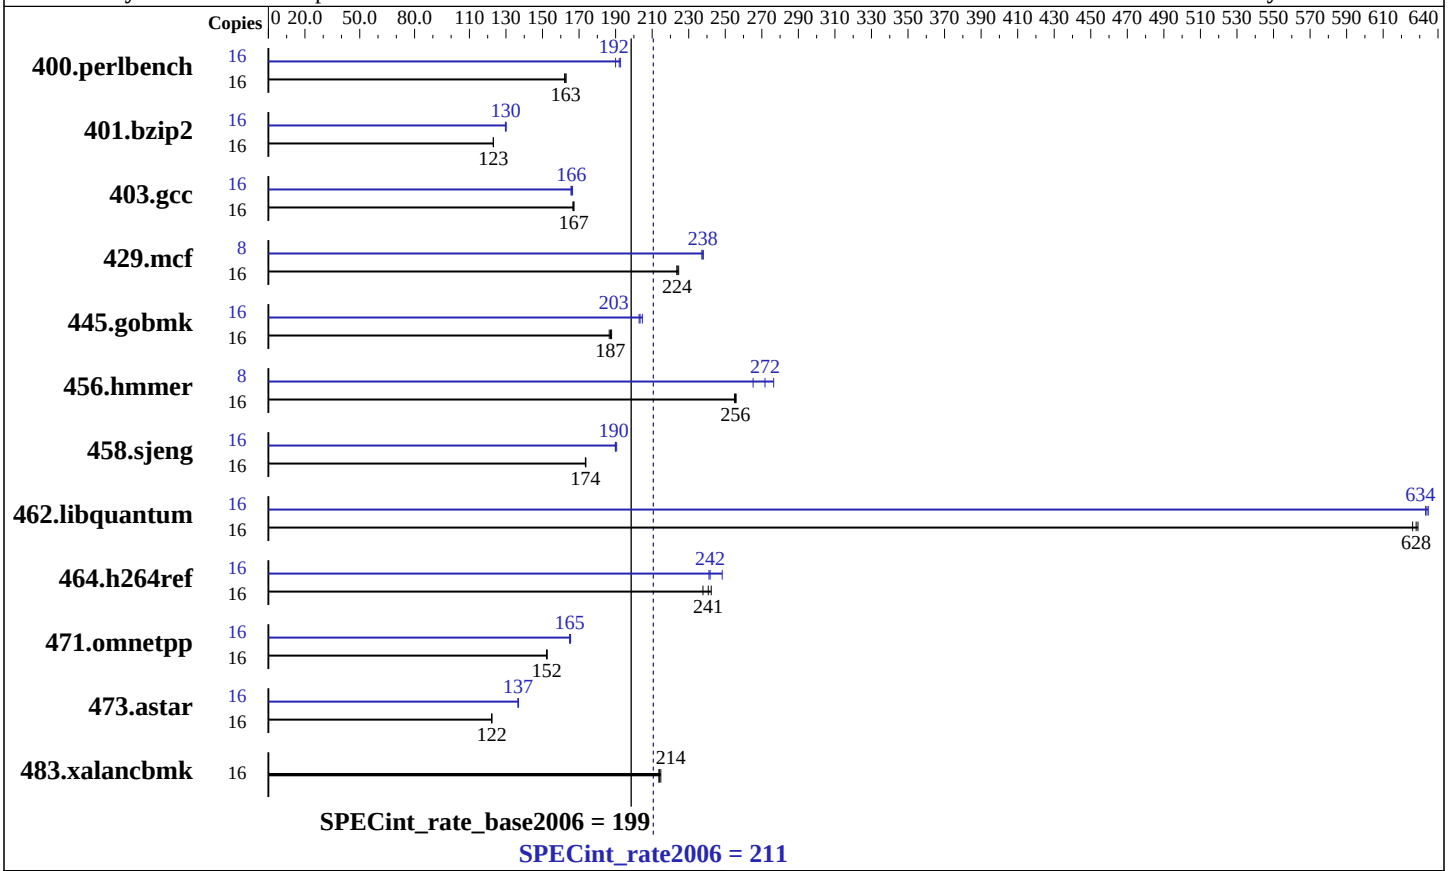

Hardware

CPU Name:	Intel Xeon E5520
CPU Characteristics:	Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB PC3-10600R CL9, 2 Rank)
Disk Subsystem:	1 x 73 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 M3 (Intel Xeon E5520)

SPECint_rate2006 = 211

SPECint_rate_base2006 = 199

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	965	162	**960**	**163**	960	163	16	812	193	823	190	**814**	**192**
401.bzip2	16	1253	123	1254	123	**1254**	**123**	16	**1188**	**130**	1191	130	1187	130
403.gcc	16	770	167	**771**	**167**	773	167	16	**777**	**166**	778	166	774	166
429.mcf	16	653	224	**652**	**224**	650	225	8	308	237	307	238	**307**	**238**
445.gobmk	16	894	188	900	187	**897**	**187**	16	827	203	820	205	**825**	**203**
456.hmmer	16	**584**	**256**	585	255	583	256	8	270	276	281	265	**275**	**272**
458.sjeng	16	1116	173	1114	174	**1115**	**174**	16	1016	191	**1019**	**190**	1020	190
462.libquantum	16	529	626	**528**	**628**	527	629	16	524	633	**523**	**634**	522	635
464.h264ref	16	1489	238	**1471**	**241**	1461	242	16	**1465**	**242**	1426	248	1469	241
471.omnetpp	16	657	152	656	153	**656**	**152**	16	**606**	**165**	605	165	607	165
473.astar	16	919	122	**919**	**122**	919	122	16	**821**	**137**	822	137	821	137
483.xalancbmk	16	514	215	**516**	**214**	517	214	16	514	215	**516**	**214**	517	214

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Platform Notes

```
 Turbo Mode Enable
 Turbo Boost set to Traditional
 CPU C State Enable
```

General Notes

```
 Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
 'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page

Peak Optimization Flags (Continued)

473.astar (continued):
`-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100804.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100804.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:46:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 August 2010.