



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp®2006 = 34.6**

IBM System x3690 X5 (Intel Xeon X7550)

**SPECfp\_base2006 = 32.2**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2010

Hardware Availability: Aug-2010

Software Availability: Jan-2010

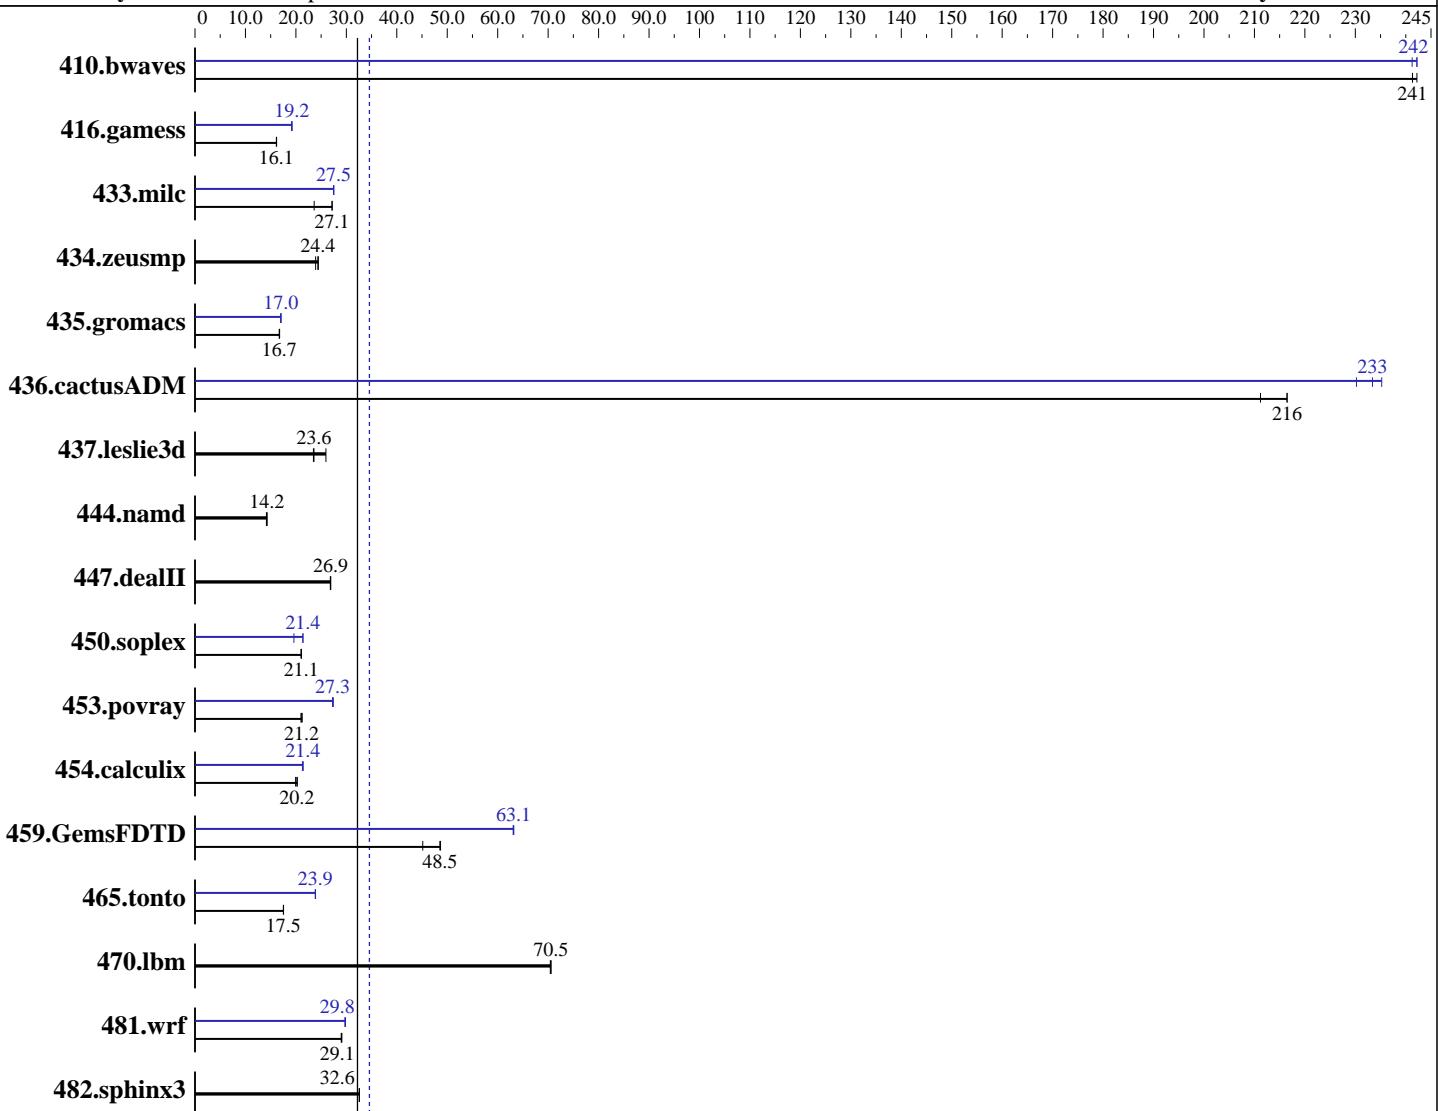

**SPECfp\_base2006 = 32.2**

**SPECfp2006 = 34.6**

## Hardware

CPU Name: Intel Xeon X7550  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SuSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	<b>SPECfp2006 =</b>	<b>34.6</b>
IBM System x3690 X5 (Intel Xeon X7550)	<b>SPECfp_base2006 =</b>	<b>32.2</b>
<b>CPU2006 license:</b> 11	<b>Test date:</b>	Jun-2010
<b>Test sponsor:</b> IBM Corporation	<b>Hardware Availability:</b>	Aug-2010
<b>Tested by:</b> IBM Corporation	<b>Software Availability:</b>	Jan-2010
L3 Cache: 18 MB I+D on chip per chip Other Cache: None Memory: 128 GB (32 x 4 GB PC3-8500R CL7, Quad Rank) Disk Subsystem: 1 x 146 GB SAS, 15000 RPM Other Hardware: None	Base Pointers: 64-bit Peak Pointers: 32/64-bit Other Software: None	

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56.3	241	56.1	242	<b>56.3</b>	<b>241</b>	56.3	241	<b>56.1</b>	<b>242</b>	56.1	242
416.gamess	1214	16.1	<b>1213</b>	<b>16.1</b>	1210	16.2	<b>1020</b>	<b>19.2</b>	1021	19.2	1019	19.2
433.milc	389	23.6	<b>338</b>	<b>27.1</b>	337	27.2	<b>334</b>	<b>27.5</b>	334	27.5	334	27.5
434.zeusmp	<b>374</b>	<b>24.4</b>	381	23.9	372	24.4	<b>374</b>	<b>24.4</b>	381	23.9	372	24.4
435.gromacs	426	16.8	<b>426</b>	<b>16.7</b>	428	16.7	420	17.0	<b>420</b>	<b>17.0</b>	419	17.0
436.cactusADM	56.6	211	55.2	216	<b>55.2</b>	<b>216</b>	50.8	235	<b>51.2</b>	<b>233</b>	51.9	230
437.leslie3d	400	23.5	362	26.0	<b>399</b>	<b>23.6</b>	400	23.5	362	26.0	<b>399</b>	<b>23.6</b>
444.namd	<b>563</b>	<b>14.2</b>	562	14.3	567	14.2	<b>563</b>	<b>14.2</b>	562	14.3	567	14.2
447.dealII	<b>426</b>	<b>26.9</b>	427	26.8	425	26.9	<b>426</b>	<b>26.9</b>	427	26.8	425	26.9
450.soplex	396	21.0	395	21.1	<b>396</b>	<b>21.1</b>	<b>390</b>	<b>21.4</b>	390	21.4	425	19.6
453.povray	253	21.0	<b>251</b>	<b>21.2</b>	251	21.2	<b>195</b>	27.3	194	27.4	<b>195</b>	<b>27.3</b>
454.calculix	414	19.9	407	20.3	<b>409</b>	<b>20.2</b>	387	21.3	<b>385</b>	<b>21.4</b>	385	21.4
459.GemsFDTD	<b>219</b>	<b>48.5</b>	235	45.1	218	48.7	<b>168</b>	<b>63.1</b>	168	63.1	168	63.2
465.tonto	562	17.5	<b>561</b>	<b>17.5</b>	561	17.6	<b>412</b>	<b>23.9</b>	412	23.9	413	23.8
470.lbm	195	70.6	195	70.4	<b>195</b>	<b>70.5</b>	195	70.6	195	70.4	<b>195</b>	<b>70.5</b>
481.wrf	384	29.1	385	29.0	<b>384</b>	<b>29.1</b>	374	29.8	376	29.7	<b>375</b>	<b>29.8</b>
482.sphinx3	598	32.6	599	32.6	<b>598</b>	<b>32.6</b>	<b>598</b>	<b>32.6</b>	599	32.6	<b>598</b>	<b>32.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

Turbo Boost set to Traditional

## General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run  
 Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502  
 OMP\_NUM\_THREADS set to number of cores  
 KMP\_AFFINITY set to granularity=fine,scatter  
 KMP\_STACKSIZE set to 200M



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	<b>SPECfp2006 =</b>	<b>34.6</b>
IBM System x3690 X5 (Intel Xeon X7550)	<b>SPECfp_base2006 =</b>	<b>32.2</b>
<b>CPU2006 license:</b> 11	<b>Test date:</b>	Jun-2010
<b>Test sponsor:</b> IBM Corporation	<b>Hardware Availability:</b>	Aug-2010
<b>Tested by:</b> IBM Corporation	<b>Software Availability:</b>	Jan-2010

## Base Compiler Invocation

C benchmarks:  
  icc -m64

C++ benchmarks:  
  icpc -m64

Fortran benchmarks:  
  ifort -m64

Benchmarks using both Fortran and C:  
  icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
  433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
  444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
  465.tonto: -DSPEC\_CPU\_LP64  
  470.lbm: -DSPEC\_CPU\_LP64  
  481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
  -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
  -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:  
  -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
  -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 34.6**

IBM System x3690 X5 (Intel Xeon X7550)

**SPECfp\_base2006 = 32.2**

CPU2006 license: 11

**Test date:** Jun-2010

Test sponsor: IBM Corporation

**Hardware Availability:** Aug-2010

Tested by: IBM Corporation

**Software Availability:** Jan-2010

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp2006 = 34.6**

IBM System x3690 X5 (Intel Xeon X7550)

**SPECfp\_base2006 = 32.2**

CPU2006 license: 11

Test date: Jun-2010

Test sponsor: IBM Corporation

Hardware Availability: Aug-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

416.gamess: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsSE4 .2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 11:48:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 August 2010.