



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 39.0

IBM BladeCenter HX5 (Intel Xeon X7542)

SPECfp_base2006 = 35.8

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2010

Hardware Availability: Oct-2010

Software Availability: Jan-2010

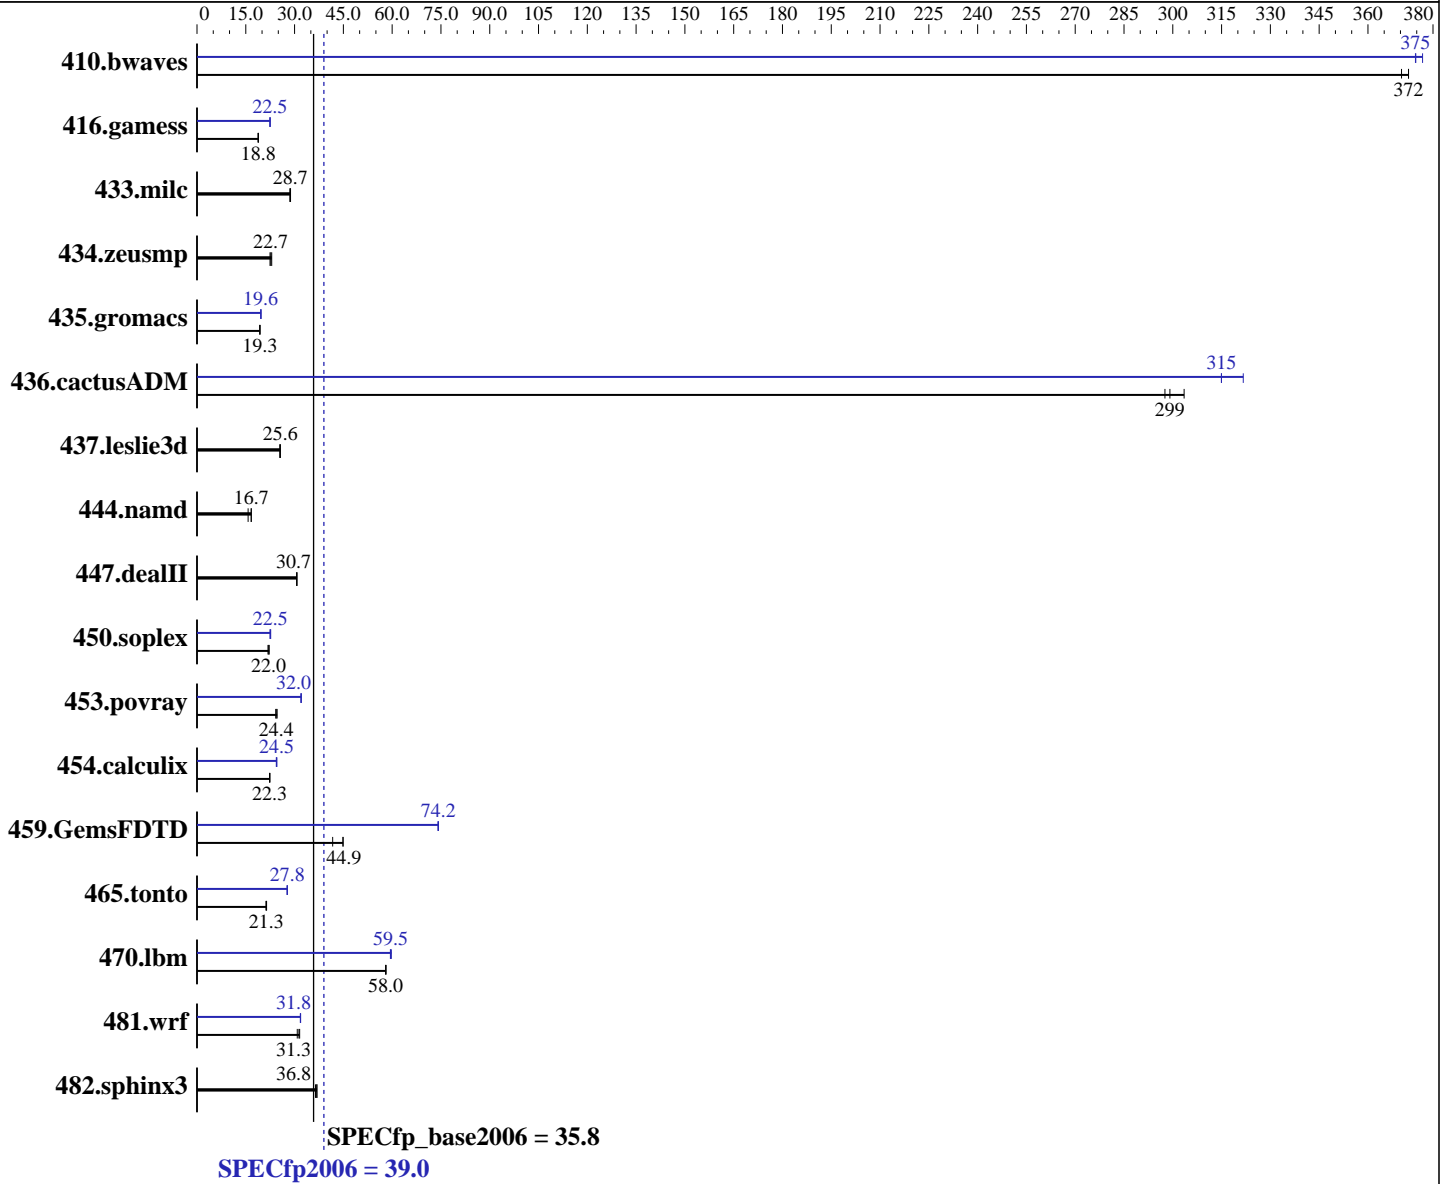

Hardware

CPU Name: Intel Xeon X7542
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = **39.0**

IBM BladeCenter HX5 (Intel Xeon X7542)

SPECfp_base2006 = **35.8**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2010

Hardware Availability: Oct-2010

Software Availability: Jan-2010

L3 Cache: 18 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (32 x 8 GB PC3-8500R CL7, Quad Rank, running at 978 MHz)
Disk Subsystem: 2 x 50 GB SATA, SSD, RAID 0
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	36.7	370	36.5	372	36.5	372	36.3	375	36.1	377	36.3	375
416.gamess	1036	18.9	1044	18.8	1039	18.8	874	22.4	870	22.5	871	22.5
433.milc	321	28.6	320	28.7	319	28.8	321	28.6	320	28.7	319	28.8
434.zeusmp	401	22.7	396	23.0	405	22.4	401	22.7	396	23.0	405	22.4
435.gromacs	370	19.3	369	19.4	369	19.3	363	19.7	364	19.6	364	19.6
436.cactusADM	39.4	303	40.2	298	40.0	299	37.9	315	37.9	315	37.2	322
437.leslie3d	367	25.6	367	25.6	369	25.5	367	25.6	367	25.6	369	25.5
444.namd	510	15.7	481	16.7	481	16.7	510	15.7	481	16.7	481	16.7
447.dealII	373	30.7	373	30.7	373	30.7	373	30.7	373	30.7	373	30.7
450.soplex	376	22.2	382	21.8	378	22.0	370	22.5	368	22.7	371	22.5
453.povray	218	24.4	220	24.2	216	24.6	166	32.0	166	32.1	166	32.0
454.calculix	368	22.4	369	22.3	370	22.3	338	24.4	336	24.6	337	24.5
459.GemsFDTD	254	41.7	237	44.9	236	44.9	143	74.1	143	74.2	143	74.2
465.tonto	460	21.4	462	21.3	464	21.2	355	27.8	355	27.7	354	27.8
470.lbm	236	58.1	237	58.0	237	58.0	231	59.5	231	59.5	230	59.8
481.wrf	354	31.6	356	31.3	362	30.8	351	31.9	351	31.8	351	31.8
482.sphinx3	528	36.9	535	36.4	530	36.8	528	36.9	535	36.4	530	36.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Platform Notes

Turbo Boost set to Traditional

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 39.0

IBM BladeCenter HX5 (Intel Xeon X7542)

SPECfp_base2006 = 35.8

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2010

Hardware Availability: Oct-2010

Software Availability: Jan-2010

General Notes (Continued)

KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 39.0

IBM BladeCenter HX5 (Intel Xeon X7542)

SPECfp_base2006 = 35.8

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Oct-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `basepeak = yes`

447.dealIII: `basepeak = yes`

450.soplex: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 39.0

IBM BladeCenter HX5 (Intel Xeon X7542)

SPECfp_base2006 = 35.8

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Oct-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 39.0

IBM BladeCenter HX5 (Intel Xeon X7542)

SPECfp_base2006 = 35.8

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Aug-2010
Hardware Availability: Oct-2010
Software Availability: Jan-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:05:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 August 2010.