SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DAI (Intel Xeon X5650, 2.66 GHz)

SPECfp®2006 = 42.5

SPECfp_base2006 = 39.9

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2010
Hardware Availability: Mar-2010
Software Availability: Jan-2010

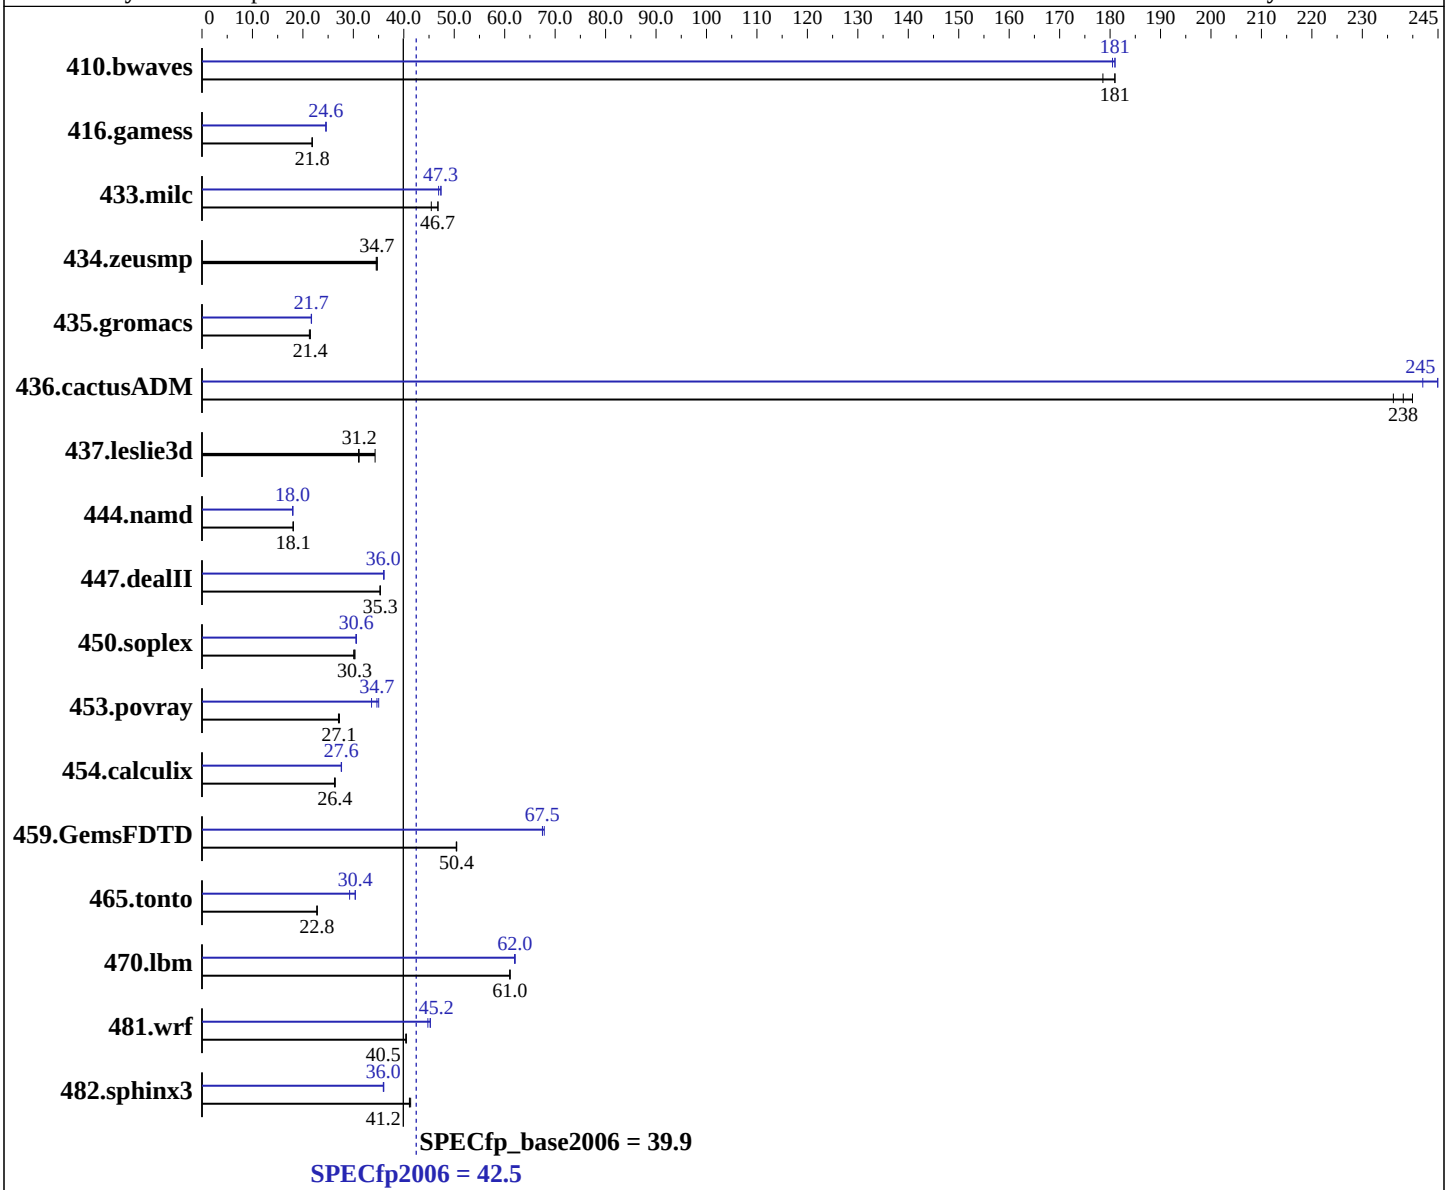

Hardware

CPU Name:	Intel Xeon X5650
CPU Characteristics:	Intel Turbo Boost Technology up to 3.06 GHz
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) Kernel 2.6.27.19-5-default
Compiler:	Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8DAI (Intel Xeon X5650, 2.66 GHz)

SPECfp2006 = 42.5

SPECfp_base2006 = 39.9

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2010
Hardware Availability: Mar-2010
Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 1000 GB SATA II, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	76.1	179	**75.1**	**181**	75.1	181	**75.1**	**181**	75.3	180	75.1	181
416.gamess	897	21.8	896	21.9	**897**	**21.8**	**797**	**24.6**	796	24.6	797	24.6
433.milc	202	45.5	**196**	**46.7**	196	46.8	196	46.9	194	47.4	**194**	**47.3**
434.zeusmp	264	34.5	262	34.7	**263**	**34.7**	264	34.5	262	34.7	**263**	**34.7**
435.gromacs	**333**	**21.4**	335	21.3	333	21.5	329	21.7	**329**	**21.7**	330	21.7
436.cactusADM	**50.2**	**238**	50.6	236	49.8	240	**48.8**	**245**	49.4	242	48.8	245
437.leslie3d	303	31.0	**302**	**31.2**	274	34.3	303	31.0	**302**	**31.2**	274	34.3
444.namd	443	18.1	**444**	**18.1**	444	18.1	**446**	**18.0**	446	18.0	446	18.0
447.dealII	324	35.3	**324**	**35.3**	324	35.3	**318**	**36.0**	317	36.1	318	36.0
450.soplex	**276**	**30.3**	275	30.3	277	30.1	273	30.5	272	30.6	**273**	**30.6**
453.povray	197	27.1	**196**	**27.1**	195	27.2	**153**	**34.7**	152	35.0	158	33.6
454.calculix	314	26.3	313	26.4	**313**	**26.4**	**299**	**27.6**	299	27.6	298	27.7
459.GemsFDTD	211	50.4	**210**	**50.4**	210	50.5	**157**	**67.5**	157	67.5	156	67.8
465.tonto	432	22.8	431	22.8	**431**	**22.8**	**324**	**30.4**	324	30.4	336	29.3
470.lbm	**225**	**61.0**	225	61.1	225	61.0	**221**	**62.0**	221	62.0	222	61.9
481.wrf	276	40.5	276	40.4	**276**	**40.5**	**247**	**45.2**	247	45.3	249	44.8
482.sphinx3	471	41.4	**473**	**41.2**	474	41.1	541	36.0	542	35.9	**542**	**36.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
```

Platform Notes

```
Fan speed set to Full Speed in BIOS Setup.
As tested, the system used a Supermicro CSE-743TQ-865B chassis and a Matrox G550 graphics card.
The chassis is configured with a PWS-865-PQ power supply, 2 SNK-P0038P heatsinks,
as well as 4 FAN-0074L and 2 FAN-0082L4 cooling fans.
```

General Notes

```
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Fortran benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-ansi-alias`

470.lbm: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-parallel -ansi-alias -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32 -unroll2`

C++ benchmarks:

444.namd: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-fno-alias -auto-ilp32`

447.dealII: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias -scalar-rep- -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20101028.html

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20101028.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:56:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 October 2010.