SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX620 S6, Intel Xeon E5503, 2.0 GHz

SPECfp®2006 = 25.6

SPECfp_base2006 = 23.9

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Sep-2010
Hardware Availability: Jul-2010
Software Availability: Jan-2010

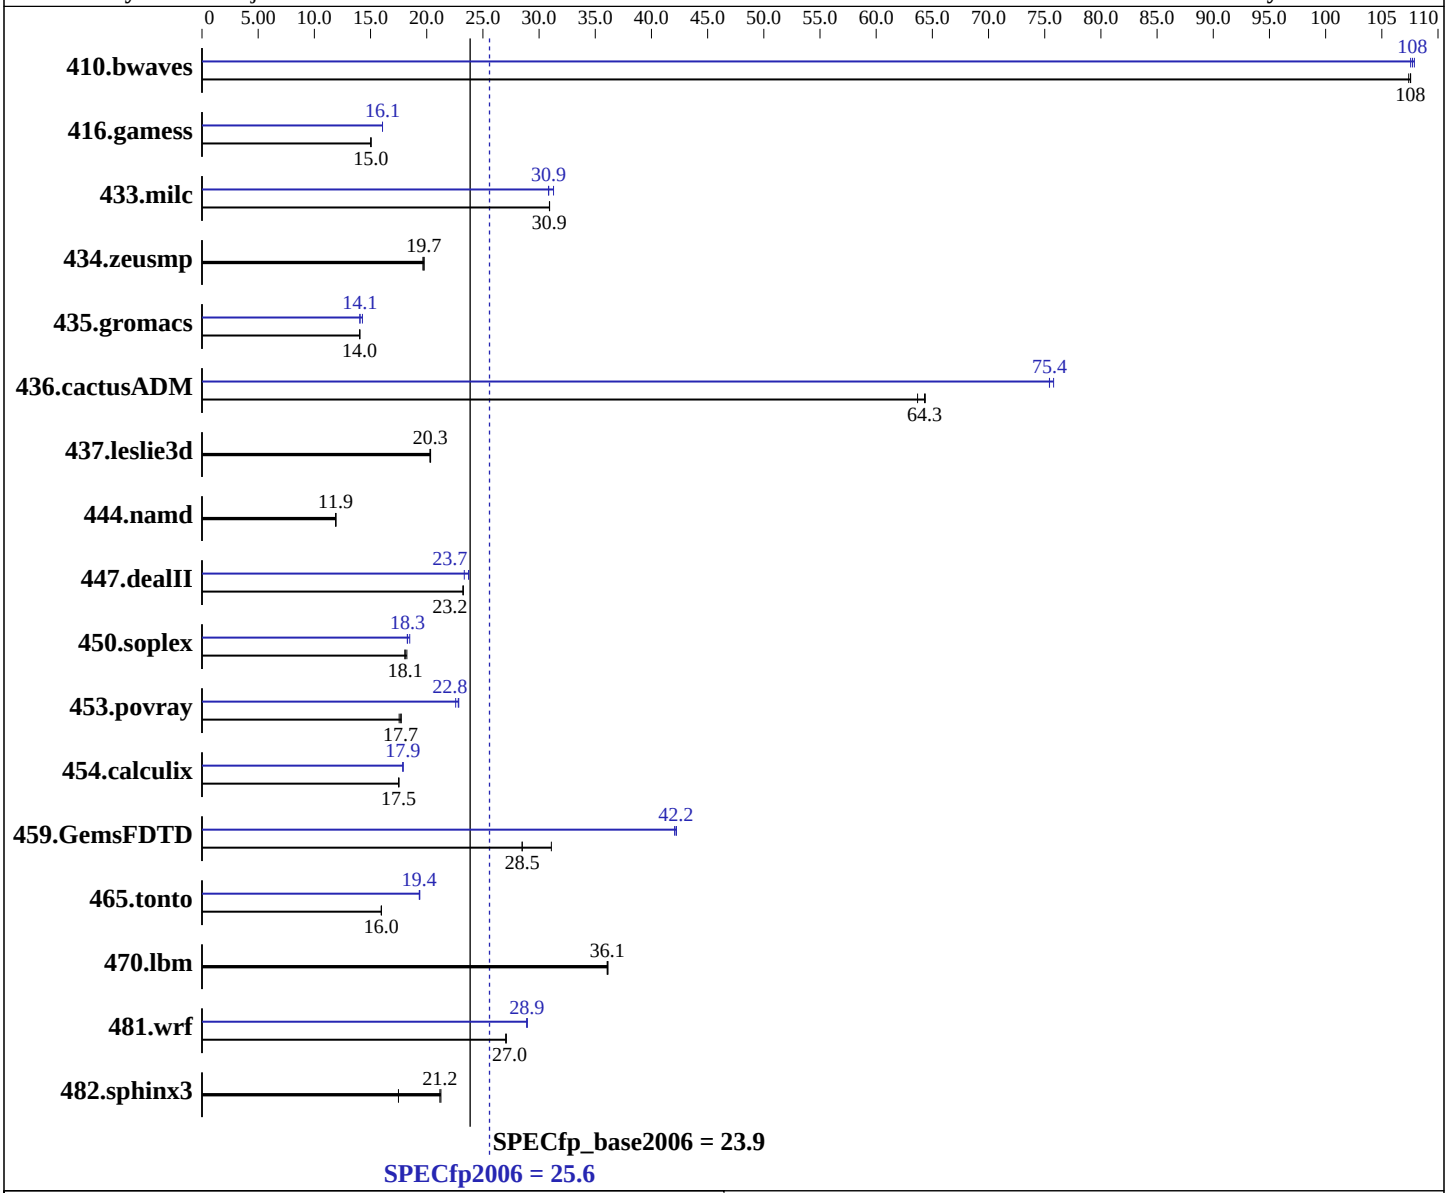

Hardware

CPU Name:	Intel Xeon E5503
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX620 S6, Intel Xeon E5503, 2.0 GHz

SPECfp2006 = 25.6

SPECfp_base2006 = 23.9

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Sep-2010
Hardware Availability: Jul-2010
Software Availability: Jan-2010

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)
Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM
Other Hardware: --

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	127	107	**126**	**108**	126	108	126	108	126	108	**126**	**108**
416.gamess	**1302**	**15.0**	1303	15.0	1302	15.0	**1219**	**16.1**	1219	16.1	1219	16.1
433.milc	297	30.9	**297**	**30.9**	297	30.9	293	31.3	**297**	**30.9**	298	30.8
434.zeusmp	460	19.8	**461**	**19.7**	463	19.7	460	19.8	**461**	**19.7**	463	19.7
435.gromacs	**509**	**14.0**	509	14.0	509	14.0	500	14.3	508	14.1	**508**	**14.1**
436.cactusADM	**186**	**64.3**	188	63.7	186	64.4	**158**	**75.4**	158	75.4	158	75.8
437.leslie3d	462	20.3	**463**	**20.3**	463	20.3	462	20.3	**463**	**20.3**	463	20.3
444.namd	**674**	**11.9**	673	11.9	674	11.9	**674**	**11.9**	673	11.9	674	11.9
447.dealII	492	23.2	492	23.2	**492**	**23.2**	482	23.7	**482**	**23.7**	490	23.3
450.soplex	457	18.2	**461**	**18.1**	462	18.1	**456**	**18.3**	451	18.5	456	18.3
453.povray	300	17.7	**301**	**17.7**	303	17.5	233	22.9	**233**	**22.8**	236	22.6
454.calculix	471	17.5	**471**	**17.5**	471	17.5	**461**	**17.9**	461	17.9	461	17.9
459.GemsFDTD	**372**	**28.5**	341	31.1	372	28.5	251	42.2	**251**	**42.2**	252	42.1
465.tonto	616	16.0	617	16.0	**616**	**16.0**	**508**	**19.4**	508	19.4	509	19.3
470.lbm	381	36.1	380	36.1	**381**	**36.1**	381	36.1	380	36.1	**381**	**36.1**
481.wrf	413	27.0	**413**	**27.0**	412	27.1	387	28.9	**386**	**28.9**	386	28.9
482.sphinx3	917	21.3	1115	17.5	**921**	**21.2**	917	21.3	1115	17.5	**921**	**21.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 800 MHz.

General Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
For information about Fujitsu please visit: http://www.fujitsu.com
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: `-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel`

416.gamess: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `basepeak = yes`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -opt-prefetch -parallel`

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-inline-calloc -opt-malloc-options=3 -auto -unroll4`

Benchmarks using both Fortran and C:

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `Same as 454.calculix`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX620 S6, Intel Xeon E5503, 2.0 GHz

SPECfp2006 = 25.6

SPECfp_base2006 = 23.9

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Sep-2010
Hardware Availability: Jul-2010
Software Availability: Jan-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:31:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 October 2010.